



75 Ohm BNC Male to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9364

Configuration

Connector 1	BNC Male
Connector 2	BNC Male
Impedance	75 Ohms
Body Style	Straight

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.5:1	
Operating Voltage, DC			500	Volts
Operating Temperature	-65		165	deg C

Mechanical Specifications

Size	
Length	1.25 in [31.75 mm]
Width	0.57 in [14.48 mm]

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Type	BNC Male		BNC Male	
Contact	Brass	Gold	Brass	Gold
Insulation	Teflon		Teflon	
Body	Brass	Nickel 100µ in. minimum	Brass	Nickel 100µ in. minimum
Coupling Nut	Brass	Nickel	Brass	Nickel

Environmental Specifications

Temperature	
Operating Range	-65 to 165 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to BNC Male Adapter PE9364](#)



75 Ohm BNC Male to BNC Male Adapter

RF Adapters Technical Data Sheet

PE9364

Plotted and Other Data

Notes:


75 Ohm BNC Male to BNC Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Male to BNC Male Adapter PE9364](#)

URL: <http://www.pasternack.com/bnc-male-bnc-male-straight-adapter-pe9364-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9364 CAD Drawing
75 Ohm BNC Male to BNC Male Adapter

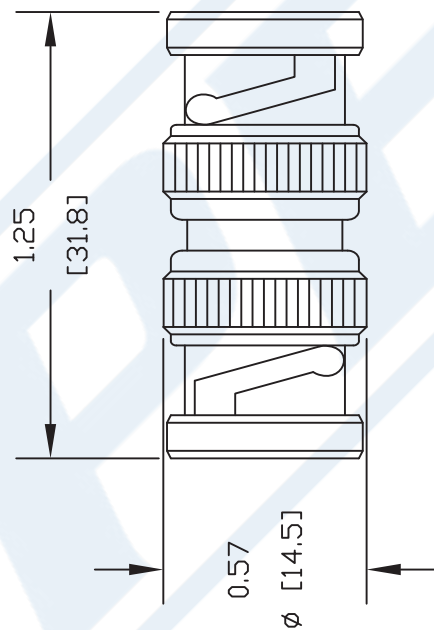

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE9364

REV. -

FSCM NO. 53919

CAD FILE 091702

SCALE N/A

SIZE A

127

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623

PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com

E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

