


Solid State Power Amplifiers 100W Ka-Band



Description

The Teledyne Paradise Datacom Compact Outdoor Solid State Power Amplifier (SSPA) is built for extreme environmental conditions and high reliability operation. Along with the robust construction exists the highest power density in the industry. This allows solid state technology to be used in applications that have long been reserved for TWTAs.

This Ka-Band SSPA weighs in at less than 44 lbs. (20.0 kg), and is only slightly larger than a shoe box.



Antenna-mount 1:1 system w/ mounting frame



SNG-mount 1:1 system w/ side-mount AC input

FEATURES

- Compact size and weight
- CE Compliance Tested
- Integrated forced-air cooling system
- Extreme Environmental Testing
- RF Output Sample Port
- Maintenance Free Operation
- Universal, Power Factor Corrected Power Supply
- Built-in 1:1 Redundancy Control
- Built-in Maintenance Switch Controller
- Ethernet Interface
- RS-485

OPTIONS

- Custom Frequency Sub-Bands
- Antenna Mounting Kit
- Remote Control Panel
- L-Band Input
- FSK monitor & control via IFL
- Phase Combined Systems
- Low line voltage operation
- Optional side-mount AC input for SNG installations

SPECIFICATIONS

- Compact Outdoor housing 10.0 X 19.5 X 8.75 in 254 X 496 X 222 mm 50.0 lbs. / 22.7 kg
- White powder coat finish
- Operating temperature: -40 to +60 °C

Teledyne Paradise Datacom LLC 328 Innovation Blvd., Suite 100 State College, PA 16803 USA Tel: 1 (814) 238-3450 Fax: 1 (814) 238-3829

www.paradisedata.com

Teledyne Paradise Datacom Ltd. 2&3 The Matchyns, London Road, Rivenhall End Witham, Essex CM8 3HA United Kingdom Tel: +44(0) 1376 515636

Fax: +44(0) 1376 533764



Compact OutdoorSolid State Power Amplifiers 100W Ka-Band

Specifications, Ka-Band SSPAs

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Frequency selection "A" Frequency selection "B"	30.00 to 31.00 29.00 to 30.00	GHz GHz
Output Power Typical, P _{sat} Guaranteed minimum, P _{Linear} ¹	HPAA2100ACXXXXXG	P _{sat} / P _{Linear} 50.0 (100) / 47.0 (50)	dBm (W)
Power Requirements Line Frequency Line Power (Voltage) (typical @ 220 VAC)	power factor HPAA2100ACXXXXXG	.91 47 to 63 P _{sat} / P _{Linear} 2000 / 1500 (180 to 265) ²	Hz W (VAC)

Note 1: P_{Linear} = maximum output power at which third order intermodulation products < -25 dBc (for two tones separated by 5 MHz) or spectral regrowth on a single QPSK at 1.5 x symbol rate or OQPSK at 1.0 x symbol rate is < -30 dBc.

Note 2: Available with low line voltage option, 90 to 265 VAC.

Common Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain Gain Flatness Gain Slope Gain Variation vs. Temperature Gain Stability Gain Adjustment	range full band per 40 MHz -40 °C to +60 °C at constant temperature 0.1 dB resolution	55-75 ± 1.0 ± 0.3 ± 1.5 ± 0.25 20	dB dB dB/40 MHz dB dB/24 hours dB
Intermodulation Distortion (Two-tone, 5 MHz spacing)	At P _{Linear} (P _{sat} - 3 dB)	-25	dBc
AM/PM Conversion	@ rated P _{Linear}	≤ 1.0	°/dB
Spurious Harmonics (SSPA only)	purious @ rated P _{Linear}		dBc dBc
Input/Output VSWR		1.50:1 (13.9)	(dB)
Noise Figure	at maximum gain	10	dB
Group Delay (per 40 MHz segment)	Linear Parabolic Ripple	0.01 0.003 1.0	ns/MHz ns/MHz ² ns p-p
Transmit Band Noise Output Power Density	TX Band	-75	dBW/4 KHz
Residual AM Noise, typical	Offset frequency from carrier 1 Hz 10 Hz 100 Hz 1 KHz 10 KHz 10 KHz 100 KHz 1 MHz	-110 -120 -130 -135 -140 -140	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz
Residual Phase Noise, typical (SSPA only)			dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz
True RF Power Detector	rue RF Power Detector Range Accuracy		dB dBm



Solid State Power Amplifiers 100W Ka-Band

Optional L-Band Operation

Teledyne Paradise Datacom offers Ka-Band amplifiers with an integrated L-Band Block Up Converter. The L-Band units utilize Paradise Datacom's proprietary zBUCTM technology. The addition of a zBUC converter to a Compact Outdoor SSPA typically increases the gain by 2-4 dB. The advantages of zBUC technology include:

- zBUC converters can detect and switch to an extenally supplied reference.
- Optional internal high stability (50 MHz) reference.
- zBUC converters can lock to an externally supplied reference of 5, 10, or 50 MHz without modification.
- zBUC converters can accept a wide range of external reference power (-10 dBm to +5 dBm)
- zBUC converters can accept FSK monitor and control signal via the IFL for complete amplifer remote control.

Available Frequency Plans

Band	Frequency Band	IF Input	LO Frequency	RF Output
Ka	Standard Ka-Band	1.0 - 2.0 GHz	29.0 GHz	30.00 - 31.00 GHz
Ka	Extended Ka-Band	1.0 - 2.0 GHz	28.0 GHz	29.00 - 30.00 GHz


Electrical Specifications for Compact Outdoor with zBUC converter

PARAMETER	NOTES	LIMITS		UNITS
Gain Gain Flatness Gain Slope Gain Stability	range Full band per 40 MHz -40 to +55°C	55-75 ± 2.0 ± 0.75 ± 2.5		dB dB dB/40 MHz dB
Phase Noise	Offset frequency from carrier 10 Hz 100 Hz 1 KHz 10 KHz 100 KHz 1 MHz	Absolute max. -30 -60 -70 -80 -90 -90	<u>Ka-band (typ.)</u> -50 -65 -76 -85 -105 -120	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz
Spurious	In-Band Signal Related Close to Carrier Spurious (≤ 20 MHz) Local Oscillator		-50 -50 -30	dBc dBc dBm
Noise Figure	At 75 dB gain setting		20	dB
Input VSWR (Return Loss)	L-Band		1.5 : 1 (13.9)	(dB)
Internal Reference Option	Aging per day (after 30 days) Aging per year (after 30 days) Reference Stability over Temperature (-20 to +85 °C)		± 1 • 10 ⁻⁹ ± 6 • 10 ⁻⁸ ± 3 • 10 ⁻⁸	



Compact Outdoor Solid State Power Amplifiers 100W Ka-Band

Outline Drawing, 100W Ka-Band Compact Outdoor SSPA

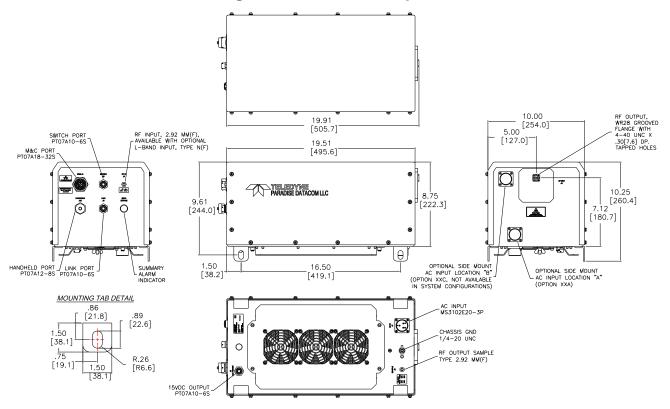


Mechanical & Environmental Specifications

PARAMETER NOTES LIMITS UNITS				
PARAMETER	NOTES		UNITS	
Size	width X length X height	10.0 X 19.51 X 8.75	inches	
		254.0 X 495.6 X 222.3	mm	
Weight	100W Ka-Band	50 (22.7) ±3%	lbs. (kg)	
	With Internal zBUC	+1.7 (0.8)	lbs. (kg)	
Finish		Paint	White; powder coat	
Connectors	RF Input	2.92 mm	Female	
	L-Band Input	Type N	Female	
	RF Output	WR28 Waveguide	Grooved Flange	
	RF Output Sample	2.92 mm	Female	
	Line Power	3-pin MS-type	Plug	
	Monitor and Control	32-pin MS-type	Socket	
	Link Port	6-pin MS type	Socket	
	Redundancy Switch	6-pin MS-type	Socket	
	Auxiliary +15VDC LNB Power (500 mA)	6-pin MS-type	Socket	
Operating Temperature	ing Temperature Ambient		°C	
Relative Humidity	elative Humidity Condensing		%	
Cooling System Integrated, Forced air		103	CFM	
ngress Protection Rating With connectors properly sealed		IP54		
Audible Noise	Measured 1m from unit, at P _{sat}	74	dBA	
Altitude	No temperature de-rating up to 10,000 ft, (3000 m)			
	De-rate maximum temperature by 2°C per 1,000 ft (300 m) beyond 10,000 ft.			
Shock	50 g p-p, 11 msec pulses			
Vibration	3g rms 30 min. 5-2000 Hz			



Solid State Power Amplifiers 100W Ka-Band

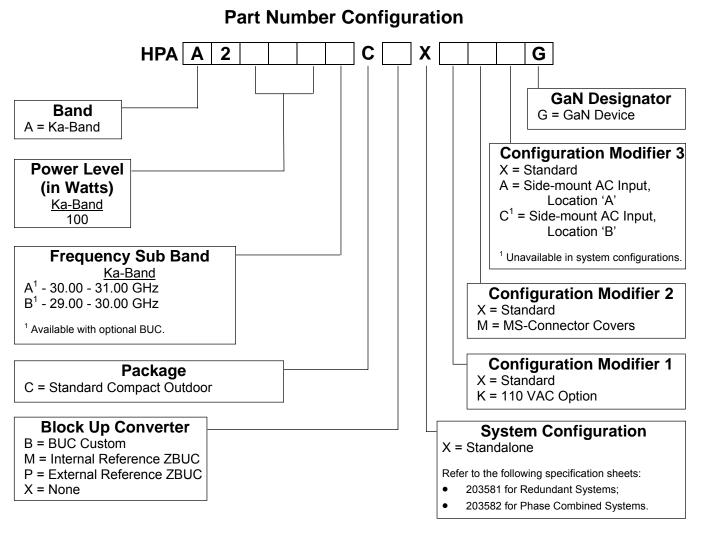

Example: A standalone 100W Ka-Band (30.0 - 31.0 GHz) Compact Outdoor SSPA with optional MS-Connector covers is part number: **HPAA2100ACXXXMXG**.

Use and Disclosure of Data

The information contained herein is classified as EAR99 under the U.S. Export Administration Regulations. Export, re-export or diversion contrary to U.S. law is prohibited.

Specifications are subject to change without notice.