



Double Binding Post to 50 Ohm BNC Female Adapter

TECHNICAL DATA SHEET

PE9013

Double Binding Post to 50 Ohm BNC Female Adapter

Configuration

| | |
|----------------|-------------|
| Connector 1 | Banana Jack |
| Impedance 1 | 0 Ohms |
| Connector 2 | BNC Female |
| Impedance 2 | 50 Ohms |
| Adapter Design | Standard |
| Body Style | Straight |

Mechanical Specifications

Size

| | |
|---------------------|--------------|
| Length, in [mm] | 2.13 [54.1] |
| Width/Dia., in [mm] | 1.17 [29.72] |

Connector 1

| | |
|--------------------------------------|---------------|
| Type | Banana Jack |
| Inner Conductor Material and Plating | Brass, Nickel |
| Body Material and Plating | Plastic |

Connector 2

| | |
|--------------------------------------|---------------|
| Type | BNC Female |
| Inner Conductor Material and Plating | Brass, Gold |
| Body Material and Plating | Brass, Nickel |
| Dielectric Type | ABS |

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

| | |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|


Double Binding Post to 50 Ohm BNC Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Double Binding Post to 50 Ohm BNC Female Adapter PE9013](http://www.pasternack.com/banana-jack-bnc-female-straight-adapter-pe9013-p.aspx)

URL: <http://www.pasternack.com/banana-jack-bnc-female-straight-adapter-pe9013-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9013 CAD Drawing
Double Binding Post to 50 Ohm BNC Female Adapter

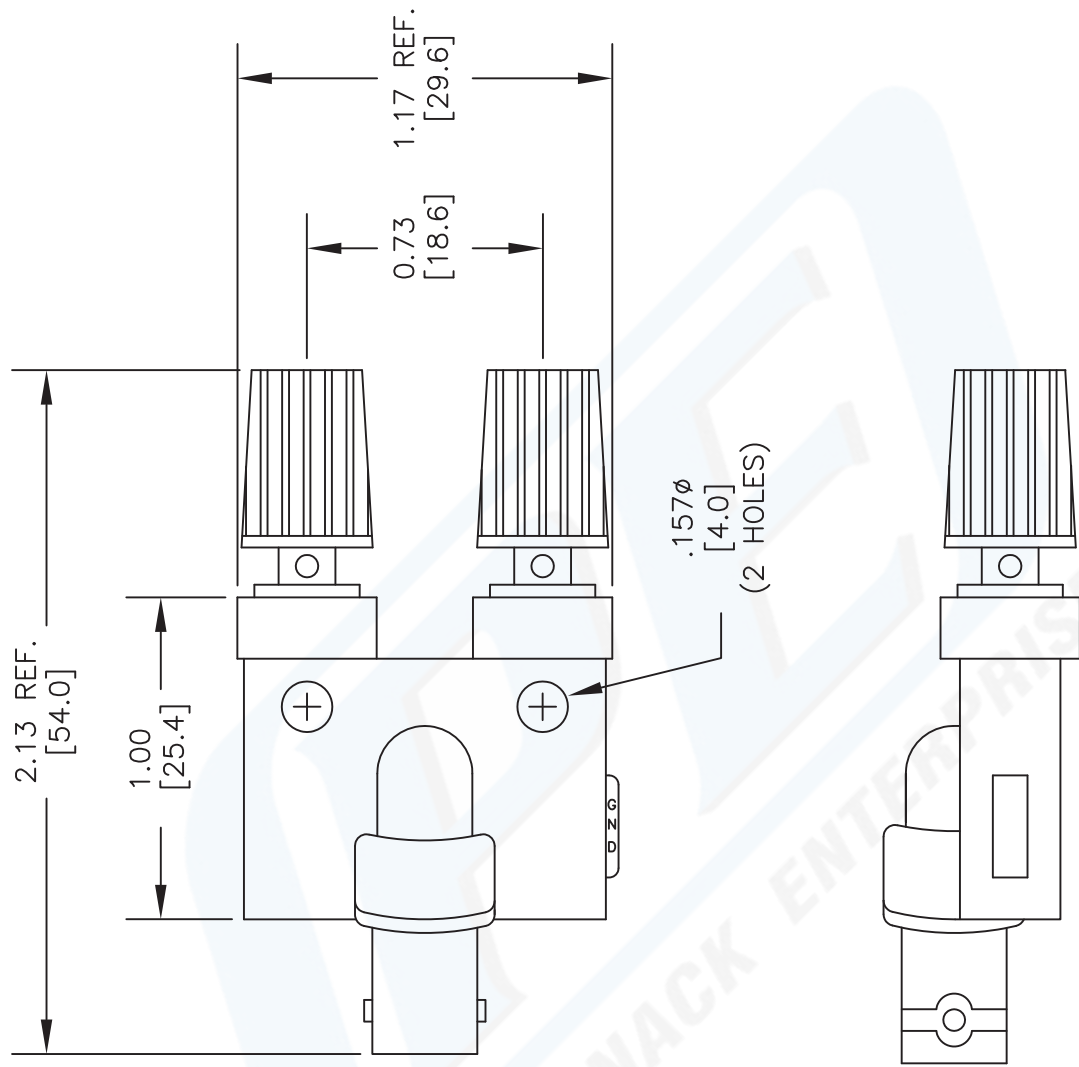

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE9013

REV. A

FSCM NO. 53919

CAD FILE 021412

SCALE N/A

SIZE A

2233

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com