

DESCRIPTION:

PFC model number LP90-100-3B-SS is a LC Lowpass filter with SMA female connectors in and out.

SPECIFICATIONS:


- PASSBAND: 1 MHz TO 90 MHz
- 3dB BANDWIDTH: 100 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND): -1 dB MAX.
- REJECTION AT 110 MHz: -25 dB MIN.
- REJECTION AT 140 MHz: -70 dB MIN.

- CONNECTORS: SMA FEMALE CONNECTORS
- SIZE: 1.50" (L) x 0.50" (W) x 0.50" (H)
- WEIGHT: 1 OZ. TYP.

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

REVISIONS		
ZONE	REV.	DESCRIPTION
	-	ORIGINAL RELEASE
		DATE 5/14/00
		APPROVED

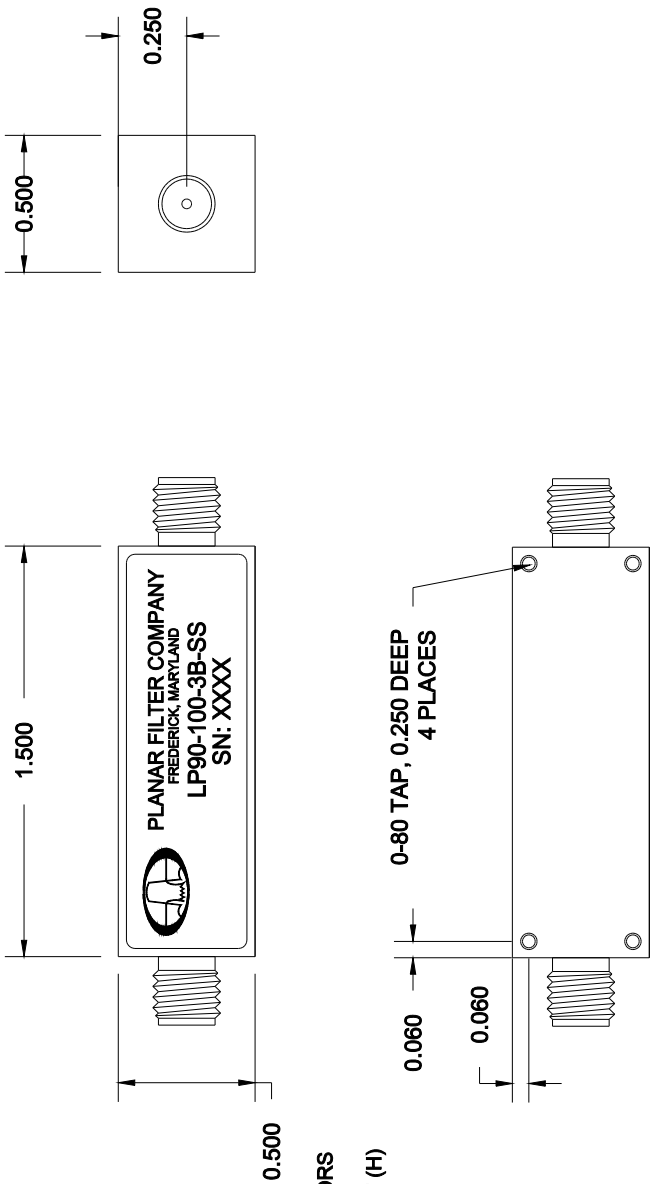

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
XXX ±0.010
XXXX ±0.005

PART NO. PF60-124		 Planar Filter Company 7311G Grove Road, Fredrick, Maryland			
APPROVALS		TITLE			
DRAWN S. PALACIO	DATE 5/14/00	OUTLINE DRAWING LP90-100-3B-SS			
CHECKED					
ISSUED		SIZE A	FSCM NO. OZXZ8	DWG NO. 155-0173	REV. —
		SCALE N/A		SHEET 1 OF 1	