



**BNC Female Bulkhead Mount Hermetically Sealed Connector
Solder Attachment Eyelet Terminal IP 67 Rated**

TECHNICAL DATA SHEET

PE44890

Configuration

Connector	BNC Female
Connector Interface Type	Eyelet
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead
Isolated Ground / Hermetic	Hermetically Sealed

Electrical Specifications

Impedance	50 Ohms
Dielectric Withstanding Voltage	1,500 Vrms

Mechanical Specifications

Temperature

Operating Range	-65 to +165 deg C
-----------------	-------------------

Size

Length	1.34 in [34.04 mm]
Width/Dia.	0.68 in [17.27 mm]

Connector

Type	BNC Female
Mating Cycles	500
Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Silver
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)


RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Female Bulkhead Mount Hermetically Sealed Connector Solder Attachment Eyelet Terminal IP 67 Rated PE44890](#)

PE44890

PE44890 CAD Drawing

BNC Female Bulkhead Mount Hermetically Sealed Connector
Solder Attachment Eyelet Terminal IP 67 Rated

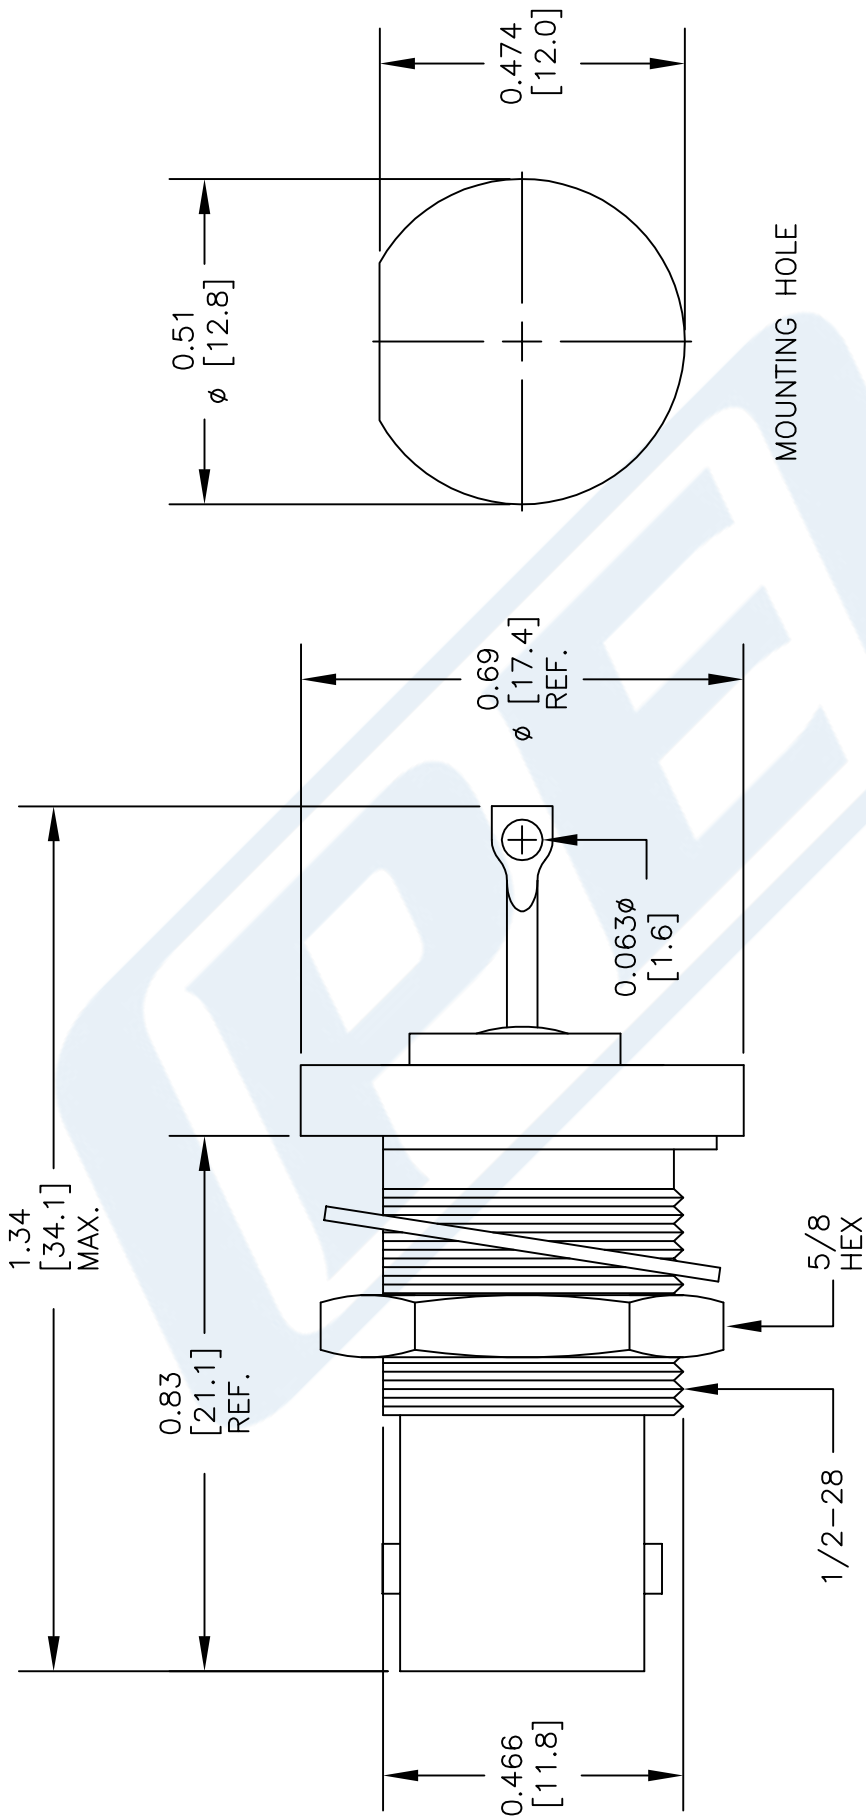

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE
PE44890

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 101613 SCALE N/A SIZE A 150