

Surface Mount RF Transformer

50Ω 500 to 2500 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	30 mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

Outline Drawing AT1521

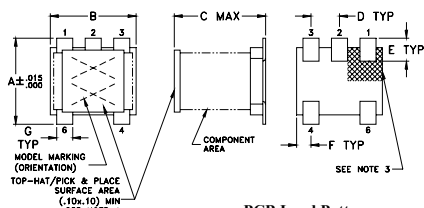

PCB Land Pattern




Notes:
1. Case Material: Plastic.
2. Termination Finish: Tin plate over Nickel plate.
3. Lead#1 Identifier shall be located in the cross-hatched area shown, on bottom view. Identifier may be either a molded or marked feature.
4. Top-Hat total thickness: .013 inches max.

Outline Dimensions (inch)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

Config. H



TC4-25X+



CASE STYLE: AT1521
PRICE: \$2.09 ea. QTY (20)
\$1.09 ea. QTY (100)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Features

- wideband, 500-2500 MHz
- balanced transmission line with secondary center tap
- good return loss
- plastic base with leads
- aqueous washable

Applications

- PCS
- cellular



Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
4	500-2500	500-2500	700-1500	750-1200

* Insertion Loss is referenced to mid-band loss, 0.2 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
400.00	1.66	6.09
500.00	1.07	8.37
600.00	0.74	10.92
700.00	0.54	13.81
800.00	0.42	17.29
900.00	0.38	21.02
1000.00	0.37	22.67
1100.00	0.40	20.79
1200.00	0.43	18.40
1300.00	0.48	16.41
1400.00	0.53	14.94
1500.00	0.59	13.79
1600.00	0.64	12.90
1800.00	0.74	11.65
2000.00	0.84	10.75
2200.00	0.96	10.03
2400.00	1.08	9.35
2500.00	1.14	8.96
2800.00	1.38	7.82
3000.00	1.59	7.06

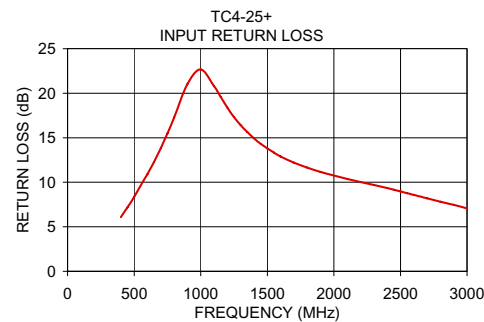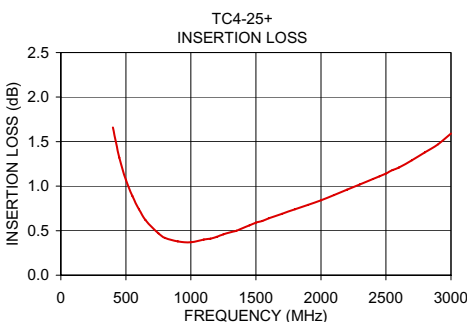

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M133852
TC4-25X+
IG/TD/AM
131218
Page 1 of 1