

MMCX Jack to MCX Jack Adapter



TECHNICAL DATA SHEET

PE9526

MMCX Jack to MCX Jack Adapter

Configuration

Connector 1	MMCX Jack
Impedance 1	50 Ohms
Connector 2	MCX Jack
Impedance 2	50 Ohms
Adapter Design	Standard
Body Style	Straight

Mechanical Specifications

Temperature

Operating Range, deg C -65 to +165

Size

Length, in [mm] 0.53 [13.46]
Width/Dia., in [mm] 0.188 [4.78]

Connector 1

Type	MMCX Jack
Inner Conductor Material and Plating	Gold
Inner Conductor Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Nickel
Dielectric Type	Teflon

Connector 2

Type	MCX Jack
Inner Conductor Material and Plating	Gold
Inner Conductor Plating Specification	MIL-G-45204
Body Material and Plating	Brass, Nickel
Dielectric Type	Teflon

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Plotted and Other Data


Notes: Values at 25 °C, sea level

MMCX Jack to MCX Jack Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE9526 CAD Drawing
MMCX Jack to MCX Jack Adapter

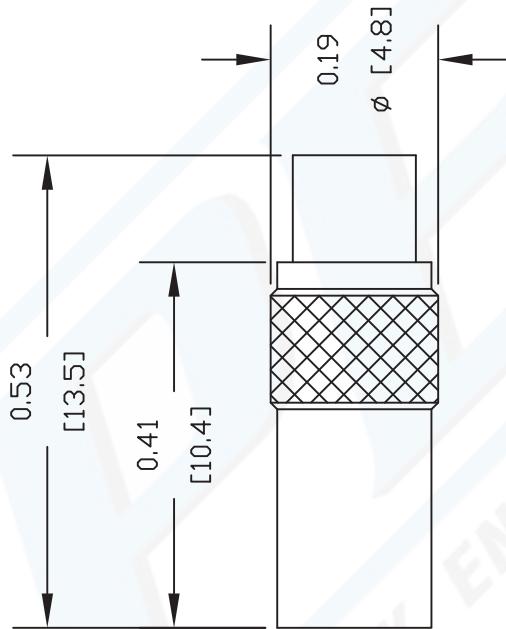

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

PE9526

DWG TITLE

PASTERNAK ENTERPRISES, INC.

PO BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasterнак.com
E-MAIL ADDRESS: sales@pasterнак.com

COAXIAL & FIBER OPTICS



REV. -	FSCM NO.	53919	CAD FILE	092502	SCALE	N/A	SIZE	A
127								