
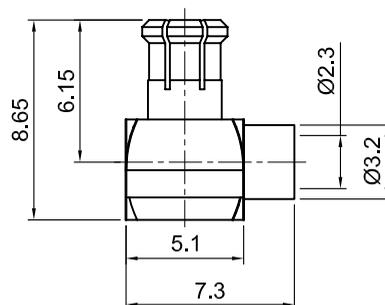


	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
		Description/Approved/Date	M.H.	05/30/00
		1. Length changed from 10 to 10.3 mm / M.H. / 06/13/01	Checked	Date
			M.H.	05/30/00
		Drawn	Date	
		K.R.E.	05/29/00	
NOTES (plating thickness in micro-inches):		5. Per MIL-P-19468	9. Nickel pl. 100 min. over copper strike	
1. Per QQ-B-626	6. Per ZZ-R-765	7. Per WW-T-799	10. Per QQ-P-35	
2. Per QQ-S-764	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	3. Per QQ-C-530	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750				

RECOMMENDED STRIPPING DIMS

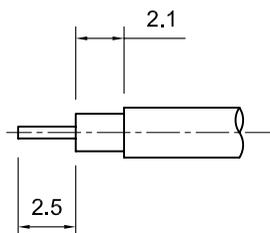

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8	 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-MXLM31GT-086		
Center Contact: Male	Phosphor Bronze, Note 4	Gold, Note 11			
Insulation	Teflon, Note 5	None	Description MCX right angle solder plug for semi-rigid .086" cable.		
Ferrule	--	--			
Gasket	--	--	Gold plated body, teflon dielectric.		
Hex Nut	--	--			
Lock Washer	--	--	Scale 3:1	Drawing No. MCX/MXLM31-086	File Name MXLM31-086