
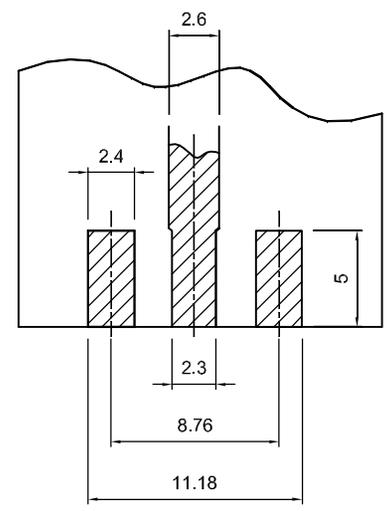


Tolerances
 1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1
Dimensions are in Millimeters

Revisions Description/Approved/Date	Approved M.H.	Date 07/25/02
	Checked M.H.	Date 07/25/02
	Drawn K.R.E.	Date 07/23/02
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 20 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

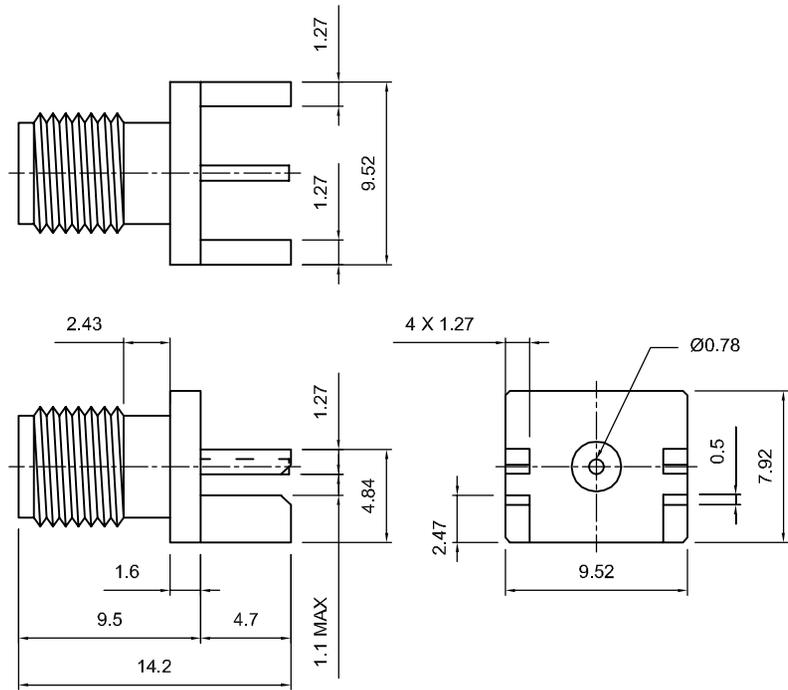

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH	Lighthouse Technologies, Inc.		
Connector Body	Brass, Note 1	Gold, Note 8	 5640 Kearny Mesa Road, Suite N San Diego, CA 92111 Part Number: LTI-SASF95ZGT-3		
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11			
Insulation	Teflon, Note 5	None	Description SMA end launch jack with wide flange for .032" PCB.		
Ferrule	--	--	Gold plated brass body, teflon dielectric.		
Gasket	--	--	Scale 2.5:1	Drawing No. SMA/SASF95Z-3	File Name SASF95Z-3
Hex Nut	--	--			
Lock Washer	--	--			