
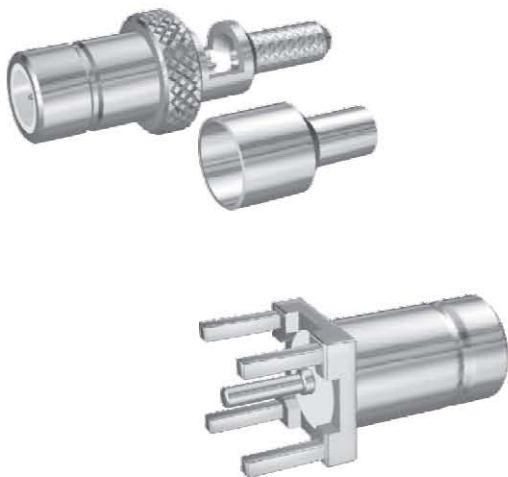


SMB

SERIES SMB RF.COAXIAL CONNECTORS

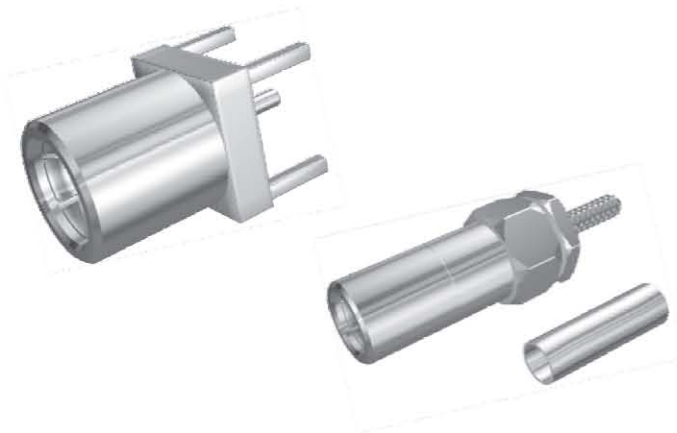

SMB Series RF coaxial connectors are developed according to the specifications of MIL-C-39012, with push-on coupling mechanism. The products have the advantages of light weight, small size, easy mating and super electrical performances. They are suitable for connecting the RF coaxial cables of high frequency circuit in radio equipments and instruments.


SMB

SERIES SMB RF.COAXIAL CONNECTORS

KEY PERFORMANCE



Temperature range		-65 ~ +165℃	Insulation resistance	≥1000M Ω
Characteristic Impedance		50 Ω	DielectricWithstanding voltage	750V(rms)
Frequency range		0 ~4GHz	Voltage rating	250V(rms)
Contact resistance	Center conductor	≤0.006 Ω	Durability	500 Cycles
	Outer conductor	≤0.001 Ω	VSWR	≤1.34

INTERFACE MATING DIMENSIONS


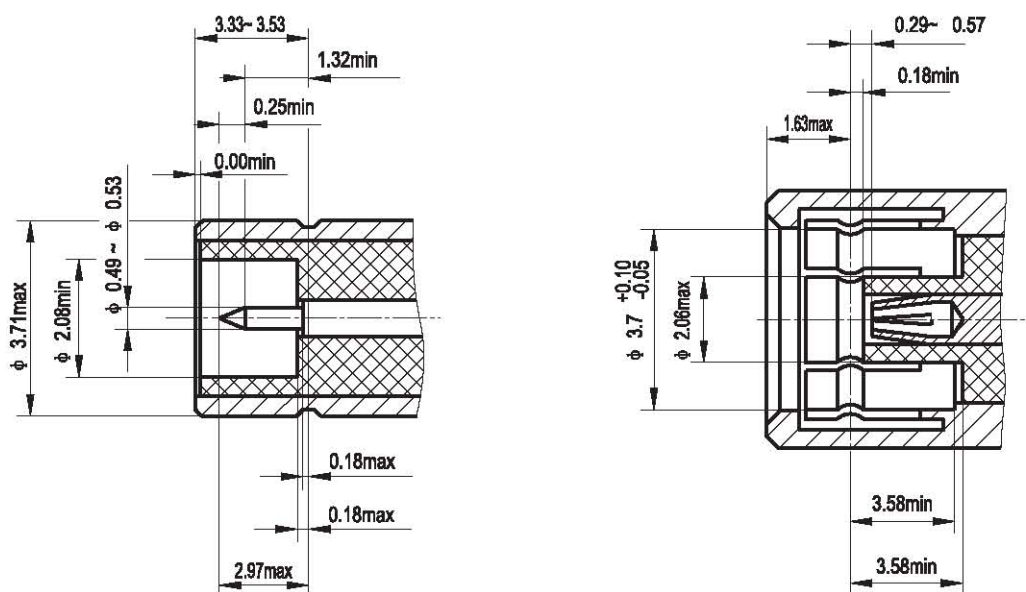






SMB-JHD





SMB-JHD1

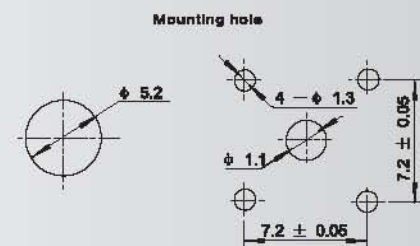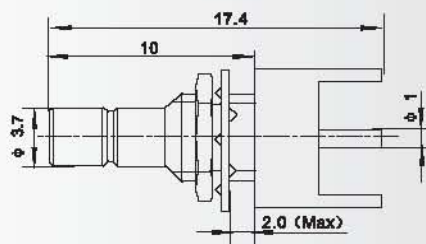



SMB-JHDA



SMB-JHD2

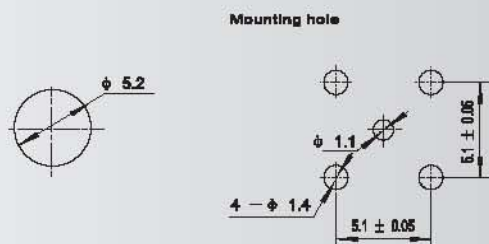


SMB-KHD
SMB-KHD3






SMB-JWHD 等

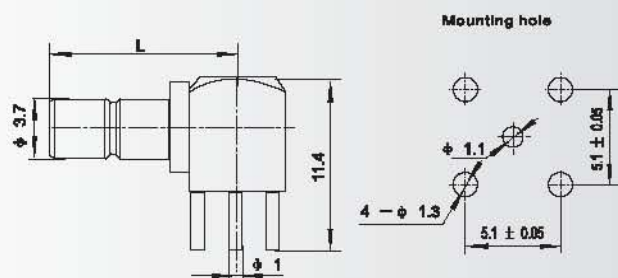


Type	L
SMB-JWHD	12.3
SMB-JWHD1	10.3
SMB-JWHD3	10.3
SMB-JWHD4	12.3




SMB-JWHY

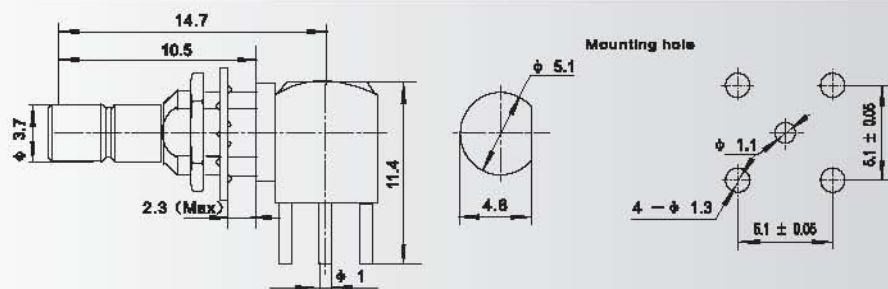


SMB-JWHD2

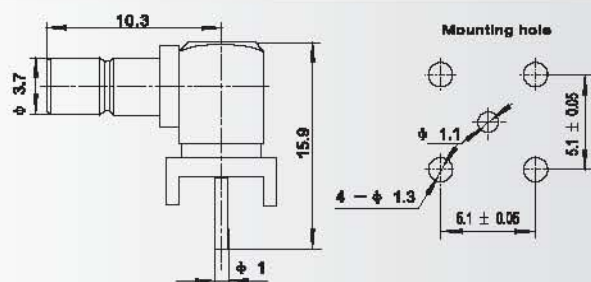

SMB-KWHD


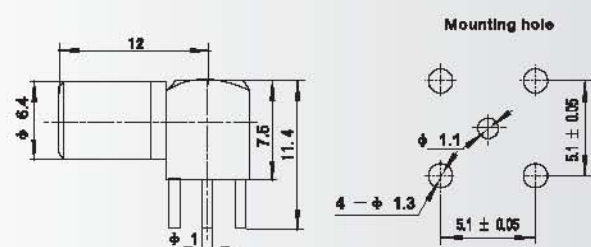


SMB-KWHD3

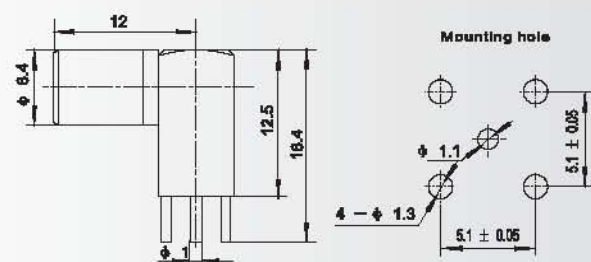





SMB-J2 等

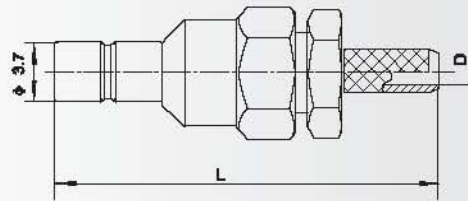

Type	L	L1	D	Cable type
SMB-J2	21.6	18	φ 0.9	SFF-50-1 SYV-50-1
SMB-J3	22.6	19	φ 1.6	SFF-50-1.5-1 SYV-50-2-1






SMB-JY2 等

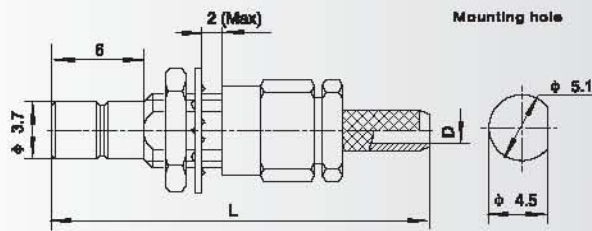

Type	D	L	L1	Cable type
SMB-JY2	φ 0.9	23.4	18	SFF-50-1 SYV-50-1
SMB-JY3	φ 1.6	24.4	19	SFF-50-1.5-1 SYV-50-2-1





SMB-JF3

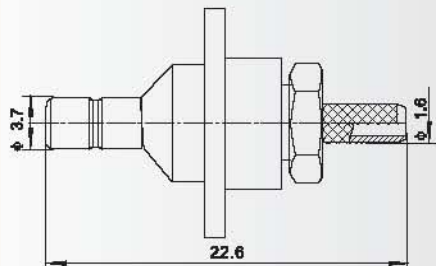

Type	Cable type
SMB-JF3	SFF-50-1.5-1 SYV-50-2-1





SMB-K2 等

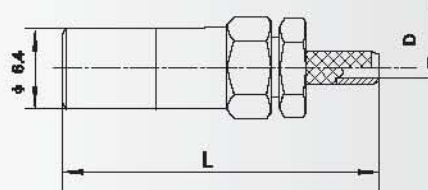

Type	L	D	L1	Cable type
SMB-K2	23.2	φ 0.9	18	SFF-50-1 SYV-50-1
SMB-K3	24.2	φ 1.6	19	SFF-50-1.5-1 SYV-50-2-1





SMB-K2A 等

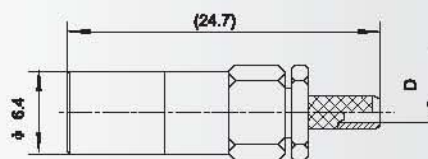


Type	D	Cable type
SMB-K2A	φ 0.9	SFF-50-1 SYV-50-1
SMB-K3A	φ 1.6	SFF-50-1.5-1 SYV-50-2-1



SMB-KY2 等

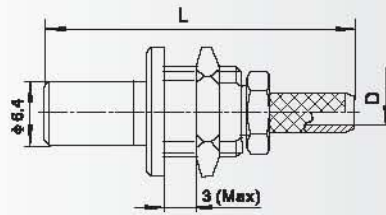


Cable stripping dimensions




Type	L	D	L1	Cable type
SMB-KY2	23.2	φ 0.9	18	SFF-50-1 SYV-50-1
SMB-KY3	24.2	φ 1.6	19	SFF-50-1.5-1 SYV-50-2-1



SMB-K2B 等

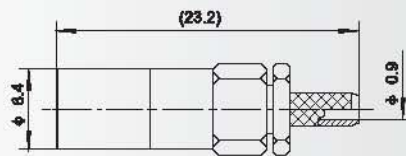


Cable stripping dimensions




Type	Cable type
SMB-K2B	SFF-50-1 SYV-50-1



SMB-KB2 等




Cable stripping dimensions




Type	L	D	Cable type
SMB-KB2	(12)	φ 2.2	SFT-50-2-1
SMB-KB3	(13.7)	φ 3.8	SFT-50-3-1



SMB-JW2 等




Cable stripping dimensions




Type	D	Cable type
SMB-JW2	φ 0.9	SFF-50-1 SYV-50-1
SMB-JW3	φ 1.8	SFF-50-1.5-1 SYV-50-2-1



SMB-KW2 等




Cable stripping dimensions




Type	D	Cable type
SMB-KW2	φ 0.9	SFF-50-1 SYV-50-1
SMB-KW3	φ 1.8	SFF-50-1.5-1 SYV-50-2-1



SMB-KW2A 等




Cable stripping dimensions



Type	D	Cable type
SMB-KW2A	φ 0.8	SFT-50-1 8YV-50-1
SMB-KW3A	φ 1.6	SFT-50-1.5-1 8YV-50-2-1



SMB-KWB1 等




Cable stripping dimensions




Type	D	Cable type
SMB-KWB1	φ 1.2	SFT-50-1
SMB-KWB2	φ 2.2	SFT-50-2-1
SMB-KWB3	φ 3.8	SFT-50-3-1




SMB-KY

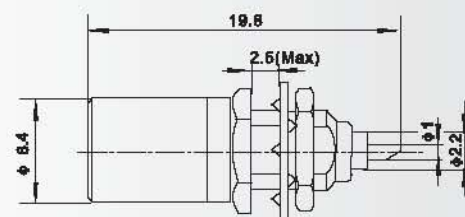


Mounting hole




SMB-JYa

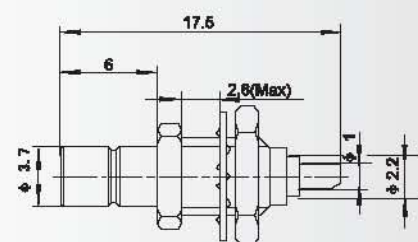


Mounting hole



SMB-JY 5




Mounting hole







SMB-JYD



SMB-JFD3

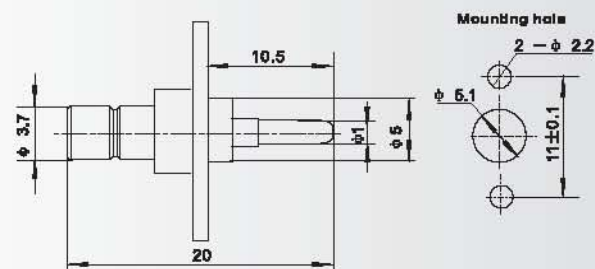


SMB-JFD 等

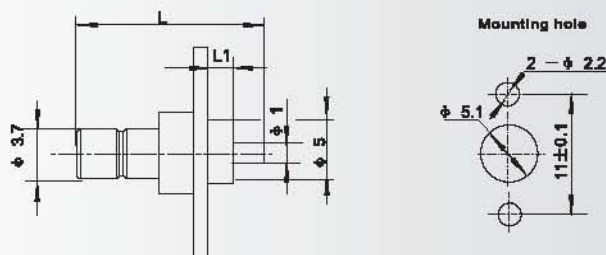

Type	L	L1
SMB-JFD	13.3	2
SMB-JFD1	17.5	2.4
SMB-JFD6	14.3	2.8
SMB-JFD7	15.3	2




SMB-JWY 等

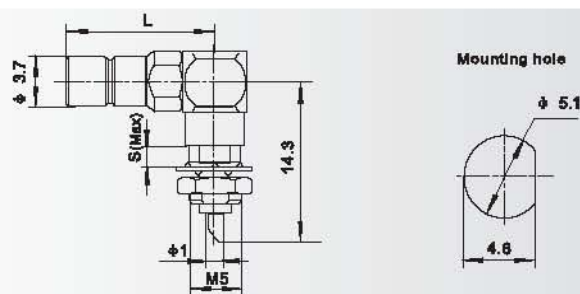


Type	L	S
SMB-JWY	11.6	2.7
SMB-JWY-1	11.7	1.4





SMB-KFD




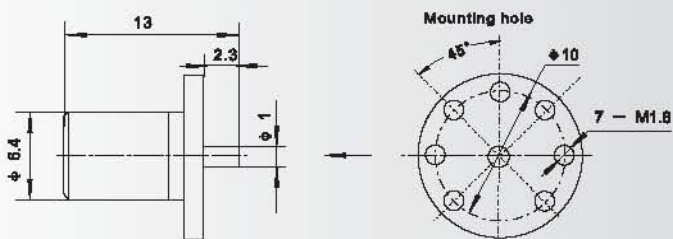


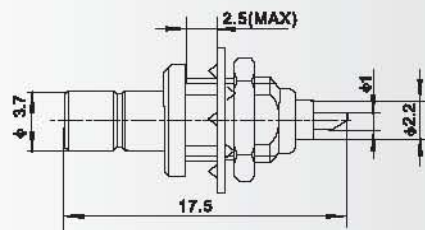


Mounting hole

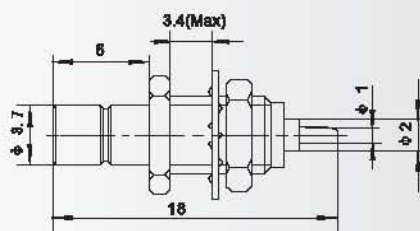

Mounting hole

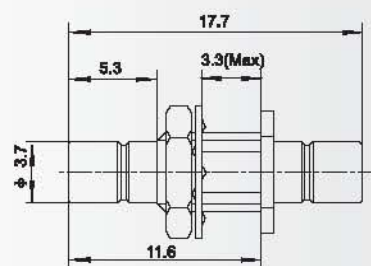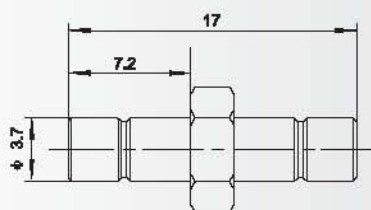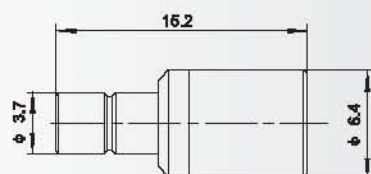


Mounting hole







SMB-JJY2

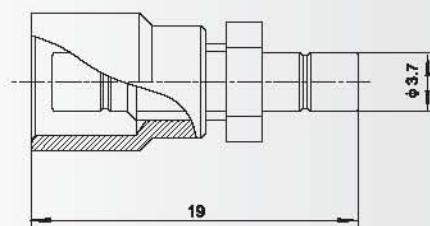


Mounting hole




SMB (M) -JJY

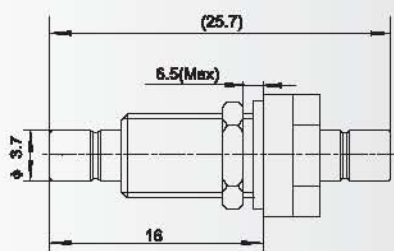


Mounting hole




SMB-KK

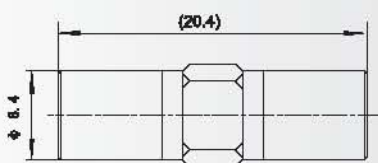

BNC/SMB-50JJ

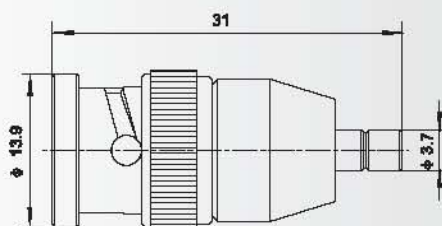


BNC/SMB-50KJ

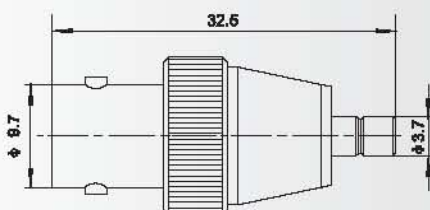





BNC/SMB-50KK

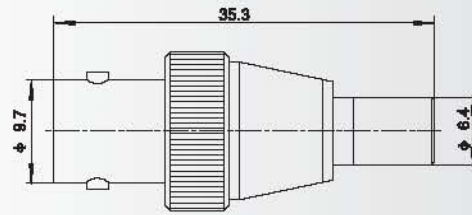


BNC/SMB-50JK

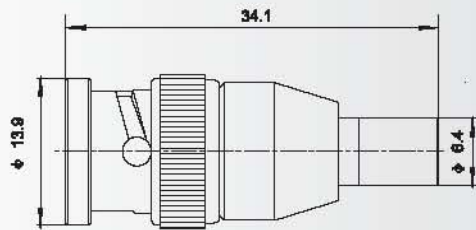


SMA/SMB-KJ

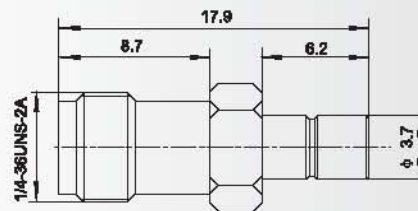

SMA/SMB-KK

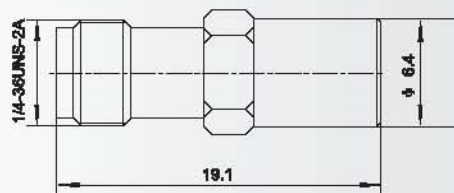


SMA/SMB-JJ

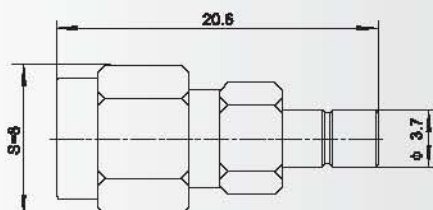





SMA/SMB-JK

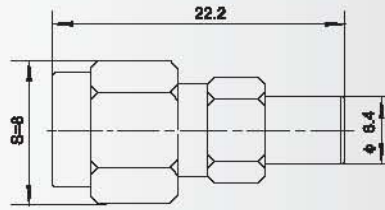


N/SMB-KK

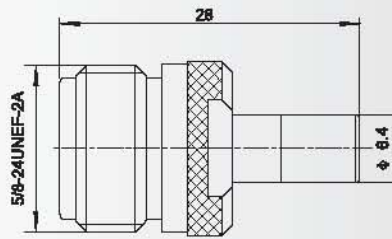


N/SMB-KJ



N/SMB-JJ

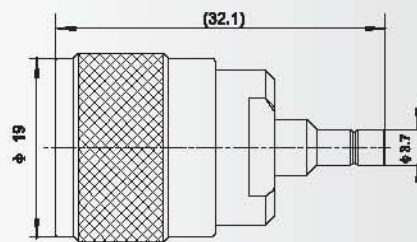


N/SMB-JK

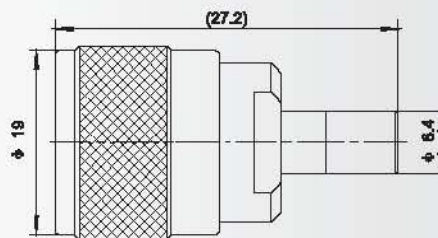




SMB-75J2.5A

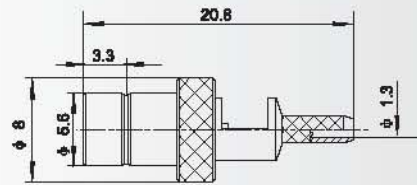


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75J2.5A	2	4.4	9	SFYFZ-75-2 ※ 8



SMB-75J3A

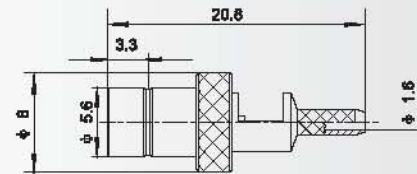


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75J3A	2	4.4	9	SFYZ-75-2-1



SMB-75J4

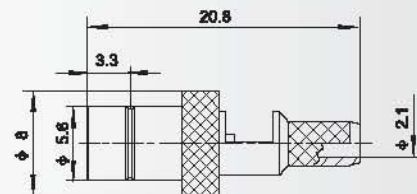


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75J4	2	4.4	9	SYV-75-2-1



SMB-75K2.5A

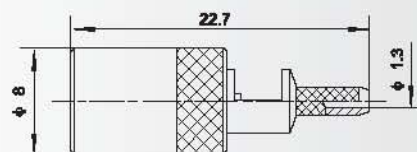


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75K2.5A	2	4.4	9	SFYFZ-75-2 ※ 8



SMB-75K2.5E

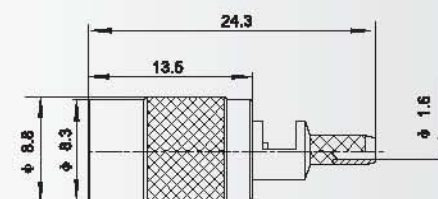


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75K2.5-E	2.7	4.8	9.3	SFYZ-75-2-1



SMB-75K4-2

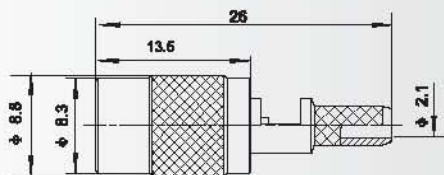


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75K4-2	2.7	6.0	10.5	SYV-75-2-1



SMB 75KW2Y等




Cable stripping dimensions




Type	A	B	C	Cable type	D	L
SMB-75KW4A	2	5.4	11.4	SYV-75-2-2	φ2.1	15.7
SMB-75KW4	2	5.4	11.4	SYV-75-2-1	φ2.1	15.7
SMB-75KW2Y	2	5.4	11.8	SYV-75-2-1	φ1.3	16.1



SMB-75KY3-1

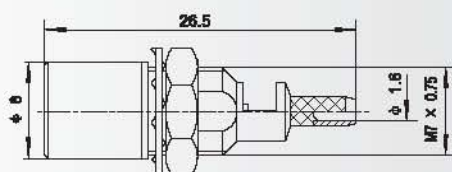


Cable stripping dimensions




Type	A	B	C	Cable type
SMB-75KY3-1	2	4.4	9	SFF-75-1.5-1




SMB-75JHD




Mounting hole



SMB-75JYWHF


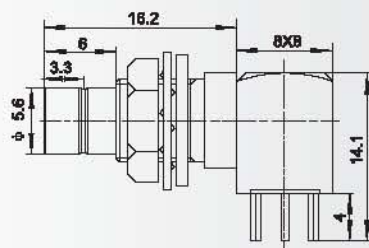


Mounting hole









SMB-75JWHD





SMB-75JYWHD5

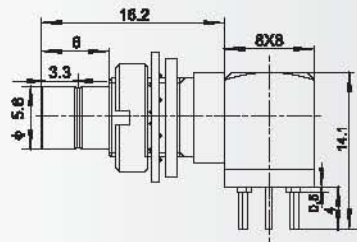



SMB-75JYWHD2



SMB-75KHD





SMB-75KHD2





SMB-75KWHD2

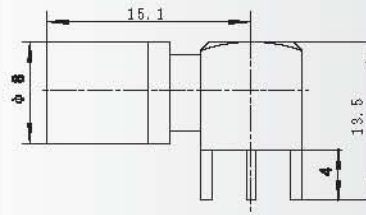

SMB-75KWHD5

