


Features

- ✓ **ULTRA** Low Jitter
- ✓ Low Cost
- ✓ XPRESS Delivery
- ✓ Frequency Resolution to six decimal places
- ✓ Stabilities to ± 20 PPM
- ✓ -20 to +70°C or -40 to +85°C operating temperatures
- ✓ Tri-State Enable / Disable Feature
- ✓ Industry Standard Package, Footprint & Pin-Out
- ✓ Fully RoHS compliant
- ✓ Gold over Nickel Termination Finish
- ✓ Serial ID with Comprehensive Traceability



Applications

- ANY application requiring a high performance LVPECL oscillator
- SONET
- Ethernet
- Storage Area Network
- Broadband Access
- Microprocessors / DSP / FPGA
- Industrial Controllers
- Test and Measurement Equipment

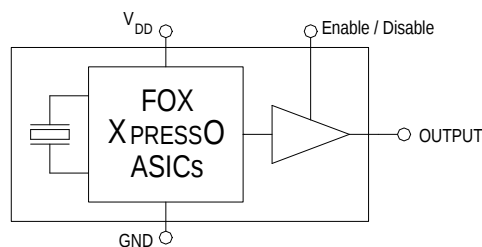

For more information -- Click on the drawing

Description

The Fox XPRESSO-ULTRA Crystal Oscillator is a breakthrough in configurable Frequency Control Solutions. XPRESSO-ULTRA utilizes a family of proprietary ASICs, designed and developed by Fox, with a key focus on noise reduction technologies.

The 4th order Delta Sigma Modulator reduces noise to the levels that are comparable to traditional Bulk Quartz and SAW oscillators. The ASICs family has the ability to select the output type and supply voltage.

With the XPRESSO-ULTRA lead-time, low cost, low noise, wide frequency range, excellent ambient performance, XPRESSO-ULTRA is an excellent choice over the conventional technologies.

Finished XPRESSO-ULTRA parts are 100% final tested.


Contents

	page
Model Selection & Part Number Guide	2
Electrical Characteristic	3
Absolute Maximums	3
Output Wave Characteristics	4
Phase Noise	5
Jitter	5
Pin Assignment	6
Recommended Circuit	6
Reflow	6
Mechanical Drawing and Pad Layout	7
Tape and Reel Specification	8
Label	8
Traceability – LOT Number & Serial Identification	9
Mechanical Test	10
Other XPRESSO Series Links	11
Fox Contact Information	11

Model Selection Guide & Fox Part Number


STEP #1: Customer selects the Model Description and provides to Fox Customer Service

Model Description

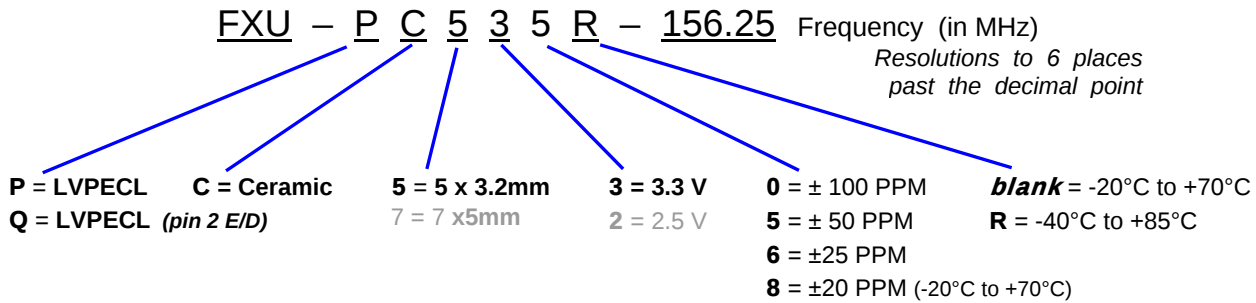

STEP #2: The Fox Customer Service team provides a customer specific Part Number for use on their Bill Of Materials (BOM).

Fox Part Number (The assigned Fox Part Number must be on the BOM – not the above Model Description)
(This will ensure receipt of the proper part)

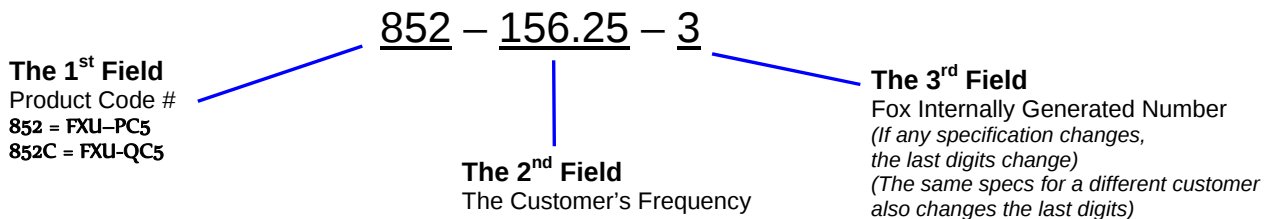

This example, **FXU-PC535R-156.25** = LVPECL Output, Ceramic, 5 x 3.2mm Package, 3.3V,
±50 PPM Stability, -40 to +85°C Temperature Range, at 156.25 MHz

Electrical Characteristics			
Parameters	Symbol	Condition	Maximum Value (unless otherwise noted)
Frequency Range	F_O		0.016 MHz to 670MHz ¹
Frequency Stability ¹		0.016 MHz to 670 MHz	100, 50, 25, 20 ² PPM
Temperature Range	T_O	Standard operating 0.016 MHz to 670 MHz	-20°C to +70°C
		Optional operating 0.016 MHz to 670 MHz	-40°C to +85°C
	T_{STG}	Storage	-55°C to +125°C
Supply Voltage	V_{DD}	Standard	3.3 V $\pm$ 5%
Input Current (@ Standard Load)	I_{DD}	0.016 MHz to 212.5 MHz 212.5+ MHz to 400 MHz 400+ MHz to 670 MHz	115 mA 128 mA 142 mA
Output Load		Standard	50 Ohms into V_{DD} -2 V_{DC} . TYP.
Start-Up Time	T_S		10 mS
Output Enable / Disable Time			100 nS
Moisture Sensitivity Level	MSL	JEDEC J-STD-020	1
Termination Finish			Au

Note 1 – Stability is inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, 1st year aging, shock and vibration.

Note 2 –. $\pm$ 20 PPM stability -20°C to +70°C only.


Absolute Maximum Ratings (Useful life may be impaired. For user guidelines only, not tested)			
Parameters	Symbol	Condition	Maximum Value (unless otherwise noted)
Input Voltage	V_{DD}		-0.5V to +5.0V
Operating Temperature	T_{AMAX}		-55°C to +85°C
Storage Temperature	T_{STG}		-55°C to +125°C
Junction Temperature			125°C
ESD Sensitivity	HBM	Human Body Model	1 kV

Output Wave Characteristics


Parameters	Symbol	Condition	Maximum Value (unless otherwise noted)
Low Output Voltage	V_{OL}	0.016 MHz to 670 MHz	1.1V to 1.65V
High Output Voltage	V_{OH}	0.016 MHz to 670 MHz	1.85V to 2.3V
Output Symmetry @ 50% V_{P-P} Level (See Drawing Below)		0.016 MHz to 312.5 MHz 312.5+ MHz to 670 MHz	45% ~ 55% 40% ~ 60%
Output Enable ¹ (PIN # 1) Voltage	V_{IH}		$\geq 70\% V_{DD}$
Output Disable ² (PIN # 1) Voltage	V_{IL}		$\leq 30\% V_{DD}$
Cycle Rise Time	T_R	(20%~80%) V_{P-P}	400 pS
Cycle Fall Time	T_F	(80%~20%) V_{P-P}	400 pS

Note1 - An optional PIN # 2 as Enable / Disable is available – see Model Selection Guide (page 2)


Rise Time / Fall Time Measurements

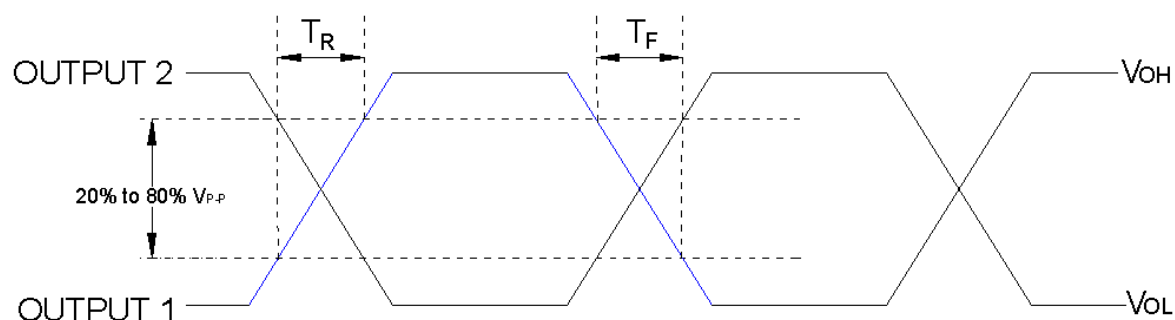

Oscillator Symmetry

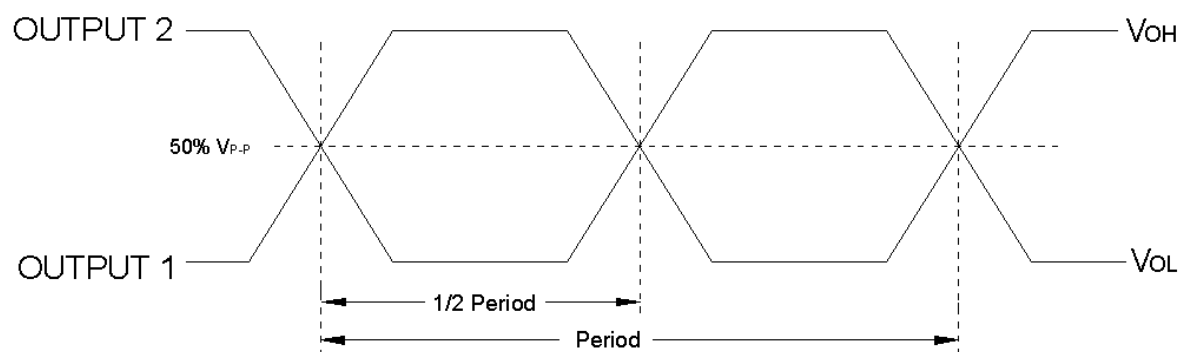

Phase Noise (typical measurements at 156.25 MHz)

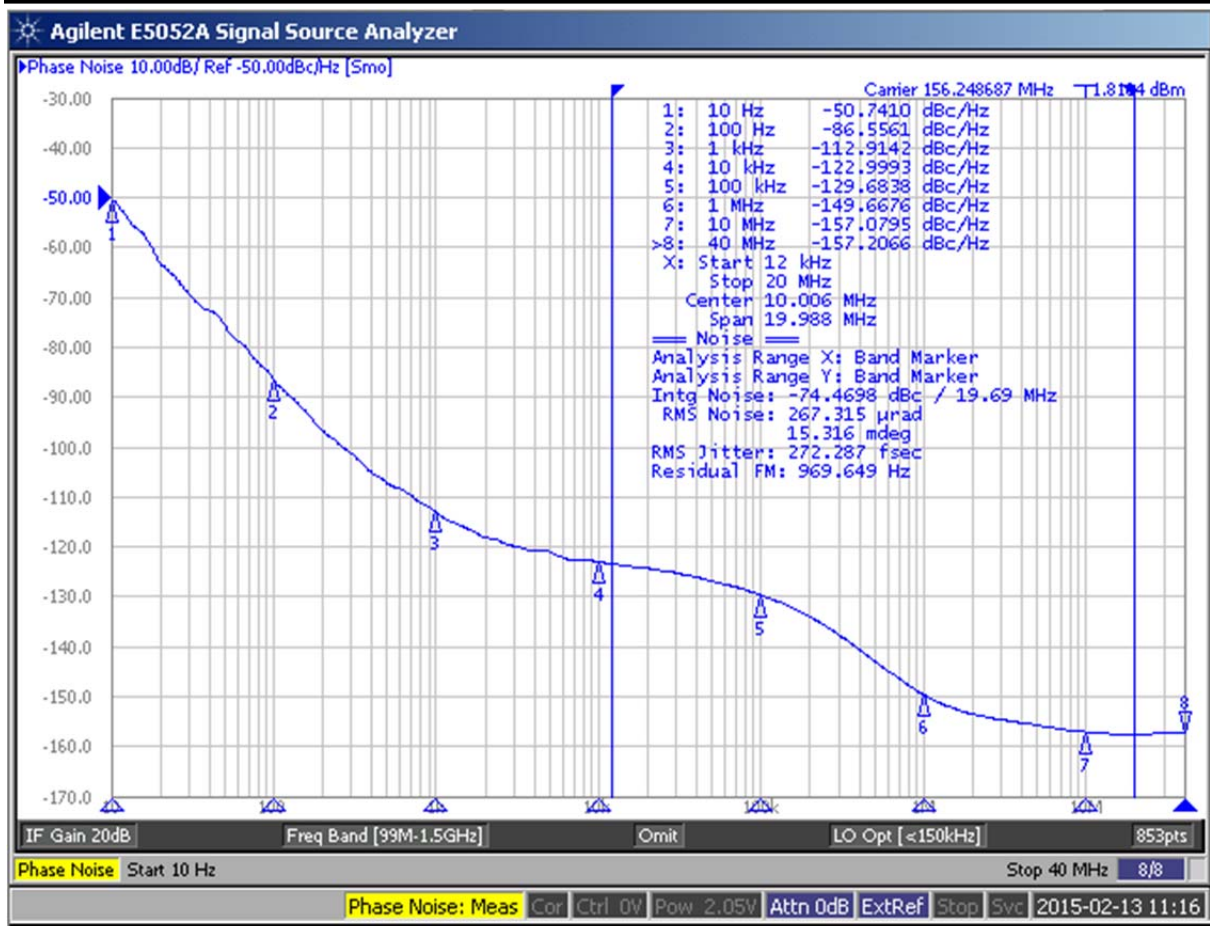

Jitter is frequency dependent. Below are typical values at select frequencies.

LVPECL Phase Jitter & Time Interval Error (TIE)

Frequency	Phase Jitter (pS) (12kHz to 20MHz)	TIE (pS) (sigma of jitter distribution)
100 MHz	0.330	1.6
125 MHz	0.310	1.4
156.25 MHz	0.272	1.5
212.5 MHz	0.295	1.7

Phase Jitter is integrated from Agilent 5052A Signal Noise Analyzer; measured directly into 50 ohm input; $V_{DD} = 3.3V$.

TIE was measured on LeCroy SDA-6000A Digital Storage Scope, directly into 50 ohm input, with Amherst M1 software; $V_{DD} = 3.3V$.

Per **MJSQ spec** (Methodologies for Jitter and Signal Quality specifications)

LVPECL Random & Deterministic Jitter Composition

Frequency	Random (Rj) (pS RMS)	Deterministic (Dj) (pS P-P)	Total Jitter (Tj) (14 x Rj) + Dj
100 MHz	0.8	5.3	16.3
125 MHz	0.7	3.2	12.8
156.25 MHz	0.65	4.25	13.5
212.5 MHz	0.8	4.1	15.5

Rj and Dj, measured on LeCroy SDA-6000A Digital Storage Scope, directly into 50 ohm input, with Amherst M1 software.


Per **MJSQ spec** (Methodologies for Jitter and Signal Quality specifications)

Pin Description and Recommended Circuit


Pin #	Name	Type	Function
1	E / D ¹	Logic	Enable / Disable Control of Output (0 = Disabled)
2	NC ²		No Connection – Leave OPEN
3	GND	Ground	Electrical Ground for V _{DD}
4	Output	Output	LVPECL Oscillator Output
5	Output 2	Output	Differential LVPECL Output
6	V _{DD} ³	Power	Power Supply Source Voltage

NOTES:

- ¹ Includes pull-up resistor to V_{DD} to provide output when the pin (1) is No Connect. (Also see note 2)
- ² An optional pin # 2 Enable / Disable is available.
- ³ Installation should include a 0.1μF bypass capacitor placed between V_{DD} (Pin 6) and GND (Pin 3) to minimize power supply line noise.

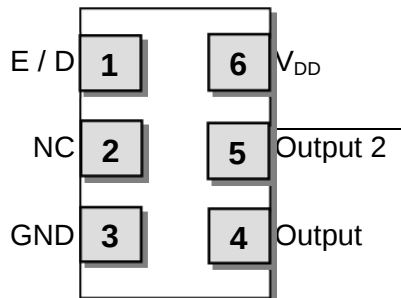


Terminations as viewed from the Top

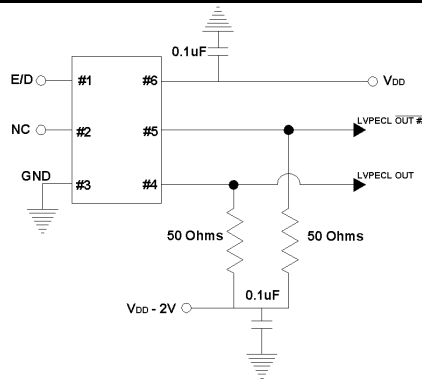


Enable / Disable Control

Pin # 1 (state)	Output (Pin # 4, Pin # 5)
OPEN (No Connection)	ACTIVE Output
"1" Level $V_{IH} \geq 70\% V_{DD}$	ACTIVE Output
"0" Level $V_{IL} \leq 30\% V_{DD}$	High Impedance

Soldering Reflow Profile (2 times Maximum at 260°C for 10 seconds MAX)

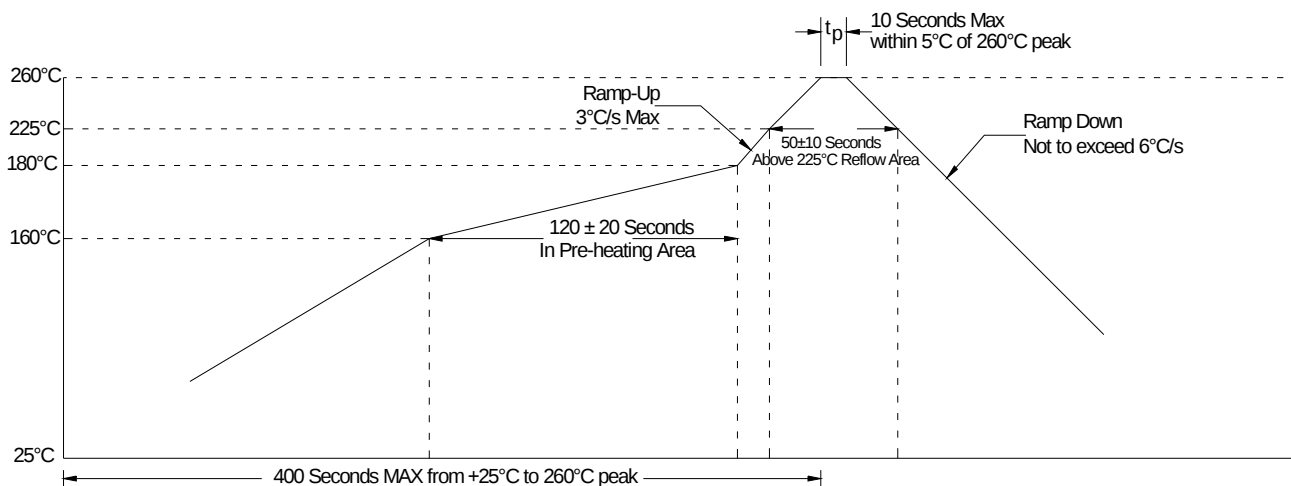


Mechanical Dimensional Drawing & Pad Layout

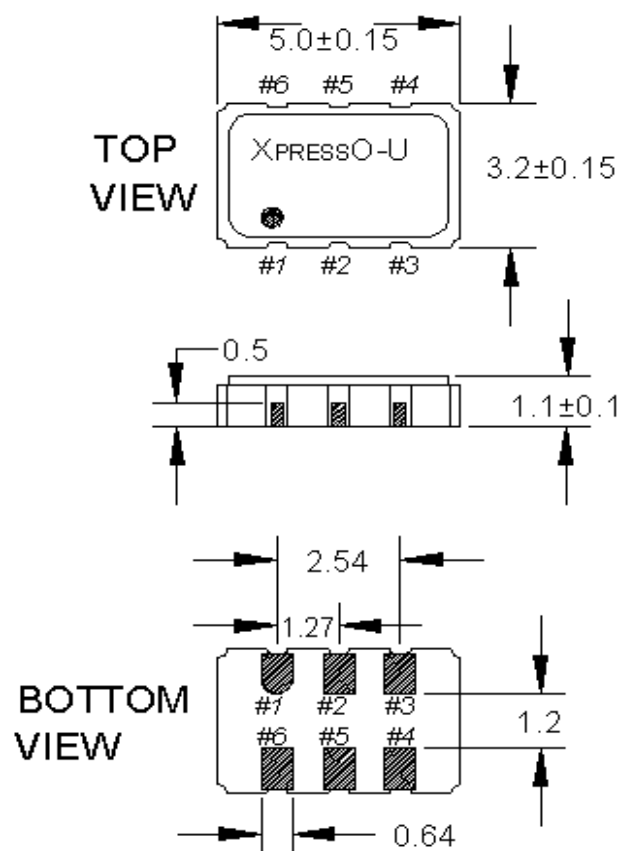

**Actual part marking
is depicted.**

See **Traceability** (pg. 9)
for more information

Recommended Solder Pad Layout

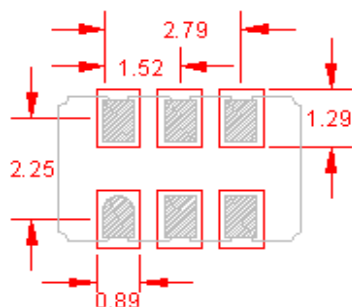


Pin Connections

#1) E/D*	#4) Output
#2) NC*	#5) Output 2
#3) GND	#6) V _{DD}


* An optional PIN # 2 as Enable / Disable is available
– see Model Selection Guide (page 2)

Drawing is for reference to critical specifications defined by size measurements.
Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary


Tape and Reel Dimensions

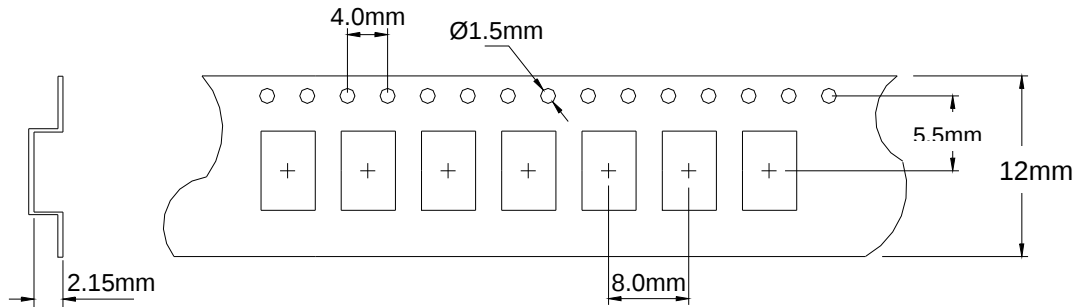

1k Reel Dimensions in mm

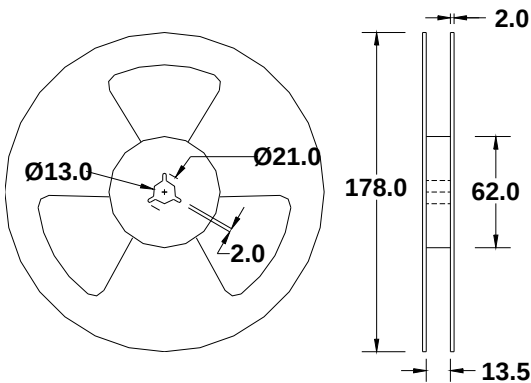


2k Reel Dimensions in mm

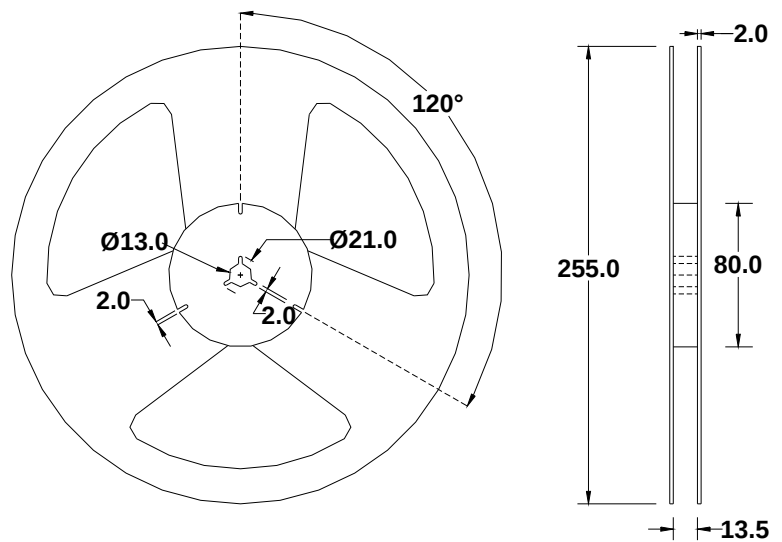

Labeling (Reels and smaller packaging are labeled with the below)

- Fox Part Number: 852-156.25-3 →
- Quantity: 2000 pieces →
- Description: FXU-PC535R-156.25 →
- Date Code 1335 →
(YYWW 2013 35th wk)
- LOT # 24435 →
If traceability should become necessary

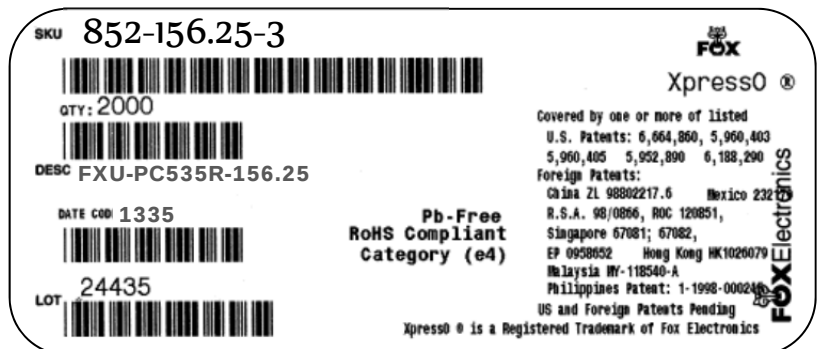

An additional identification code is contained internally if tracking should ever be necessary

Traceability – LOT Number & Serial Identification

LOT Number

The LOT Number has direct ties to the customer purchase order. The LOT Number is marked on the “Reel” label, and also stored internally on non-volatile memory inside the XPRESSO-ULTRA part. XPRESSO-ULTRA parts that are shipped Tape and Reel, are also placed in an Electro Static Discharge (ESD) bag and will have the LOT Number labeled on the exterior of the ESD bag.

It is recommended that the XPRESSO-ULTRA parts remain in this ESD bag during storage for protection and identification.

If the parts become separated from the label showing the LOT Number, it can be retrieved from inside one of the parts, and the information that can be obtained is listed below:

- Customer Purchase Order Number
- Internal Fox Sales Order Number
- Dates that the XPRESSO-ULTRA part was shipped from the factory
- The assigned customer part number
- The specification that the part was designed for

Serial Identification

The Serial ID is the individualized information about the configuration of that particular XPRESSO-ULTRA part. The Serial ID is unique for each and every XPRESSO-ULTRA part, and can be read by special Fox equipment.

With the Serial ID, the below information can be obtained about that individual, XPRESSO-ULTRA part:

- Equipment that the XPRESSO-ULTRA part was configured on
- Raw material used to configure the XPRESSO-ULTRA part
- Traceability of the raw material back to the foundries manufacturing lot
- Date and Time that the part was configured
- Any optimized electrical parameters based on customer specifications
- Electrical testing of the actual completed part
- Human resource that was monitoring the configuration of the part

Fox has equipment placed at key Fox locations World Wide to read the Lot Identification and Serial Number of any XPRESSO-ULTRA part produced and can then obtain the information from above within 24 hours

Mechanical Testing

Parameter	Test Method
Mechanical Shock	MIL-STD-202 Method 213 Condition C
Mechanical Vibration	MIL-STD-202 Method 204 5g's for 20 minutes 12 cycles of each 3 orientations: X, Y, Z
High Temperature Operating Life (HTOL)	Under Power @ 125°C for 1000 Hours
Hermetic Seal	He pressure: 4 ±1 kgf / cm ² 2 Hour soak



[XpressO-ULTRA Home](#)

[XpressO-ULTRA XOs](#)

[XpressO Brochure](#)

Patent Numbers:

US 6,664,860, US 5,960,403, US 5,952,890; US 5,960,405; US 6,188,290;
Foreign Patents: R.S.A. 98/0866, R.O.C. 120851; Singapore 67081, 67082; EP 0958652
China ZL 98802217.6, Malaysia MY-118540-A, Philippines 1-1998-000245, Hong Kong #HK1026079, Mexico #232179
US and Foreign Patents Pending
XpressO® Fox Electronics

Contact Information

[\(USA\)-Worldwide Headquarters](#)

Tel: 888-GET-2-FOX
Outside US: +1.239.693.0099,
Fax: +1.239.693.1554
Email: www.foxonline.com/email.htm

[Fox EMEA](#)

Tel: +44.1283.568153
Email: www.foxonline.com/email.htm

[Fox Singapore](#)

Tel: +886-2-22073427,
Email: www.foxonline.com/email.htm

The above specifications, having been carefully prepared and checked, is believed to be accurate at the time of publication; however, no responsibility is assumed by Fox Electronics for inaccuracies.

