



SMA Female Hermetically Sealed Connector Solder Attachment  
4 Hole Flange Pin Terminal, .340 inch Hole Spacing

TECHNICAL DATA SHEET

PE4540

**SMA Female Hermetically Sealed Connector Solder Attachment 4 Hole Flange Pin Terminal, .340 inch Hole Spacing**

**Configuration**

Connector	SMA Female
Connector Interface Type	Pin
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	4 Hole Flange
Isolated Ground / Hermetic	Hermetically Sealed

**Electrical Specifications**

Impedance, Ohms	50
-----------------	----

**Mechanical Specifications**

**Size**

Length, in [mm]	0.49 [12.45]
Width/Dia., in [mm]	0.5 [13]
Height, in [mm]	0.5 [12.7]
Weight, lbs [g]	0.006 [2.72]

**Connector**

Type	SMA Female
Contact Material and Plating	Gold
Body Material and Plating	Stainless Steel, Gold
Dielectric Type	PTFE

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

**Plotted and Other Data**

Notes:	Values at 25 °C, sea level
--------	----------------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Hermetically Sealed Connector Solder Attachment 4 Hole Flange Pin Terminal, .340 inch Hole Spacing PE4540](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female Hermetically Sealed Connector Solder Attachment  
4 Hole Flange Pin Terminal, .340 inch Hole Spacing

TECHNICAL DATA SHEET

PE4540

SMA Female Hermetically Sealed Connector Solder Attachment 4 Hole Flange Pin Terminal, .340 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Hermetically Sealed Connector Solder Attachment 4 Hole Flange Pin Terminal, .340 inch Hole Spacing PE4540](http://www.pasternack.com/sma-female-standard-pin-terminal-connector-pe4540-p.aspx)

URL: <http://www.pasternack.com/sma-female-standard-pin-terminal-connector-pe4540-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE4540 CAD Drawing

SMA Female Hermetically Sealed Connector Solder Attachment  
4 Hole Flange Pin Terminal, .340 inch Hole Spacing

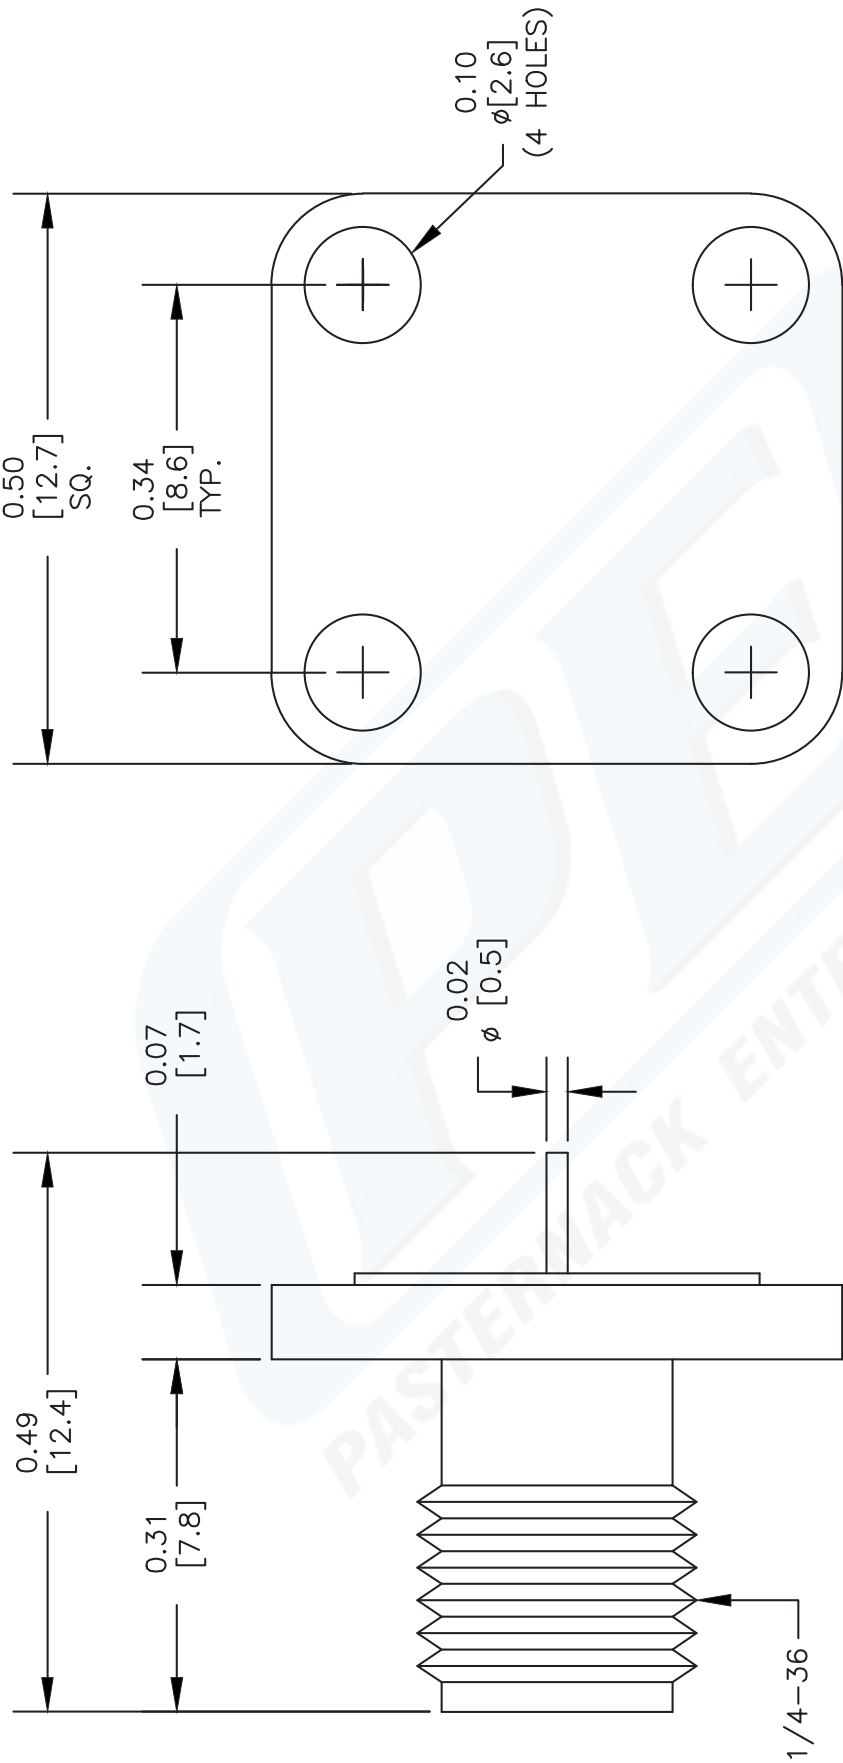

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE  
**PE4540**

FSCM NO. 53919

CAD FILE 060302

SCALE N/A

SIZE A

127

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com