



High Performance Bulkhead Type N Female Solder / Clamp connectors for PE-P142LL Coax

RF Connectors Technical Data Sheet

PE44813

Configuration

- N Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- PE-P142LL Interface Type
- Clamp/Solder Attachment
- Bulkhead
- Precision Design

Features

- Gold Platted Solder ferrules
- Stainless Steel Interface and connector Body
- Excellent VSWR to 18 Ghz
- Tuned specifically for use with 83% VoP Tape Style
- Low Loss Coax
- Compatible with Harbour LL142 Coax
- Easy to assemble multi Piece design

Description

Pasternack's solder/clamp connectors designed for use with our flexible PE-P142LL Low Loss coax offer excellent performance and durability. The multi piece design has been optimized for use with Low Loss tape wrapped coax having a 83% VoP. The stainless steel construction provides for over 500 mating cycles. These connectors are compatible with LL142 coax from Harbour Industries.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.16:1	
Insertion Loss			0.22	dB
Operating Voltage (AC)			250	Vrms
Dielectric Withstanding Voltage (AC)			750	
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size	
Length	1.62 in [41.15 mm]
Width/Dia.	0.875 in [22.23 mm]
Weight	0.09 lbs [40.82 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead Mount Precision Connector Clamp/Solder Attachment for PE-P142LL PE44813](#)





High Performance Bulkhead Type N Female Solder / Clamp connectors for PE-P142LL Coax

RF Connectors Technical Data Sheet

PE44813

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold ASTM-B488, 50µ in. minimum
Insulation	PEI	
Outer Conductor	Passivated Stainless Steel	SAE-AMS-2700
Body	Passivated Stainless Steel	SAE-AMS-2700

Environmental Specifications

Temperature

Operating Range -65 to 165 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant 01/01/1753

Plotted and Other Data

Notes:

High Performance Bulkhead Type N Female Solder /Clamp connectors for PE-P142LL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female Bulkhead Mount Precision Connector Clamp/Solder Attachment for PE-P142LL PE44813](#)


URL: <http://www.pasternack.com/n-female-pe-p142ll-connector-pe44813-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE44813 CAD Drawing

High Performance Bulkhead Type N Female Solder /
Clamp connectors for PE-P142LL Coax

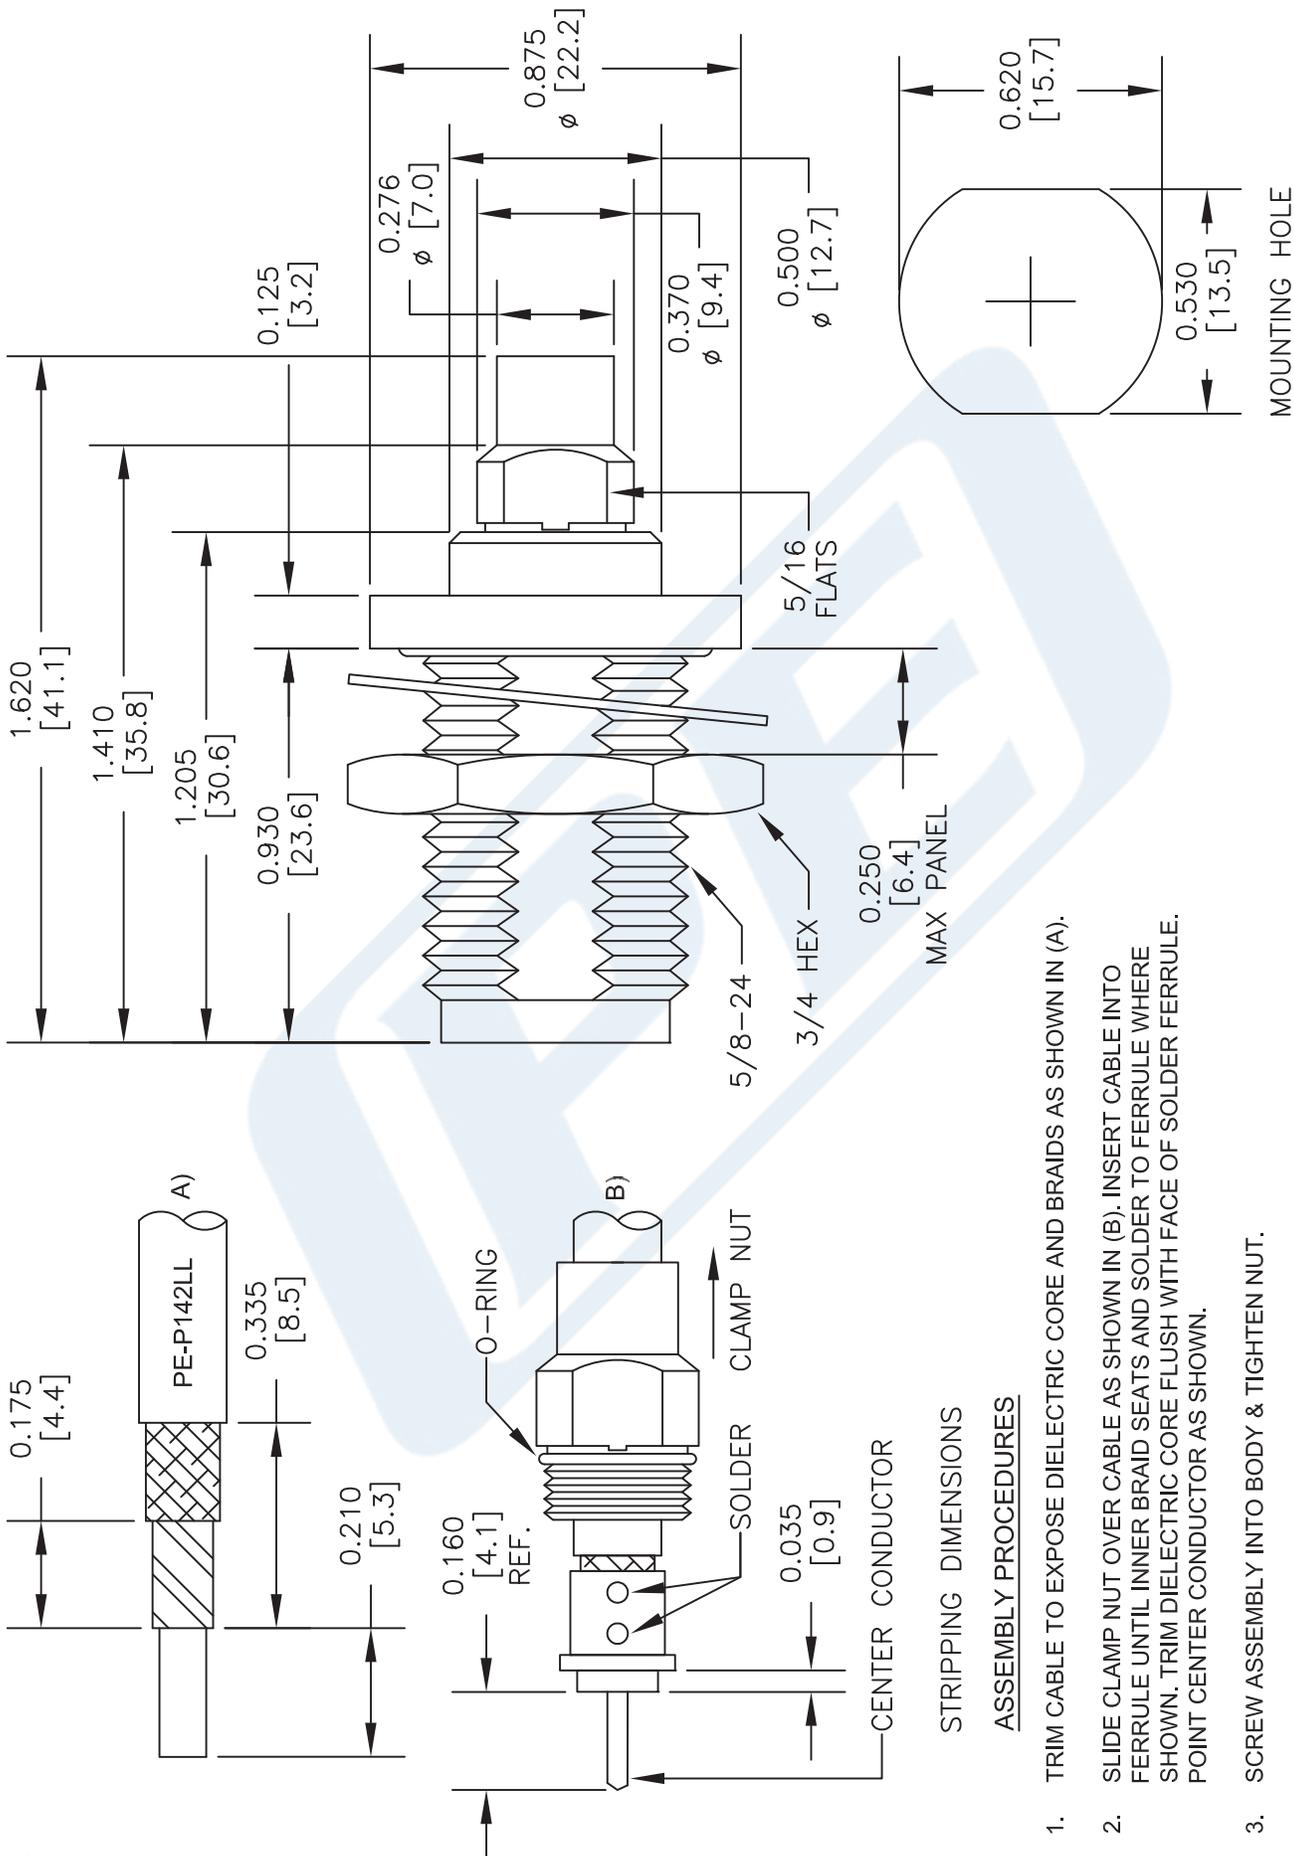

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES (mm).

DWG TITLE	PE44813		
FSCM NO.	53919	CAD FILE	111615
SCALE	N/A	SIZE	A
			150

- STRIPPING DIMENSIONS
- ASSEMBLY PROCEDURES
1. TRIM CABLE TO EXPOSE DIELECTRIC CORE AND BRAIDS AS SHOWN IN (A).
 2. SLIDE CLAMP NUT OVER CABLE AS SHOWN IN (B). INSERT CABLE INTO FERRULE UNTIL INNER BRAID SEATS AND SOLDER TO FERRULE WHERE SHOWN. TRIM DIELECTRIC CORE FLUSH WITH FACE OF SOLDER FERRULE. POINT CENTER CONDUCTOR AS SHOWN.
 3. SCREW ASSEMBLY INTO BODY & TIGHTEN NUT.

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com