


Features

- 3 wire serial integer PLL
- Miniature size (0.37"x0.39"x0.09")
- Low phase noise
- High Output Power (typ.+8dBm)
- Programming : LMX2331(NSC)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

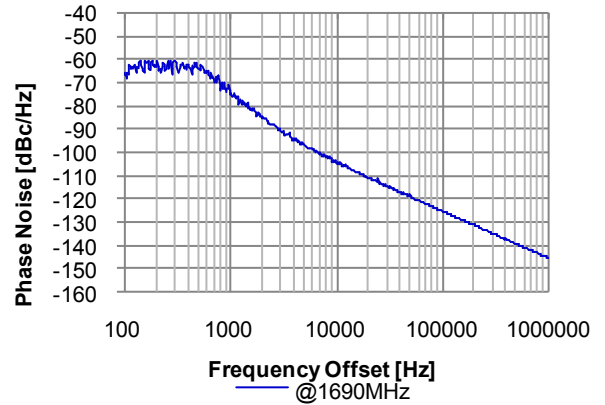


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1680		1700
Step Size	kHz		25	
Settling Time	msec		10	30
Output Power	dBm	+7.0	+9.0	+11.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset	dBc/Hz	-74	-69
	@10kHz offset	dBc/Hz	-104	-99
	@100kHz offset	dBc/Hz	-125	-120
	@1MHz offset	dBc/Hz	-145	-140
2nd Harmonic Suppression	dBc		-53	-20
Sideband Spurious Suppression	dBc			-75
Reference	Input Frequency	MHz	5	40
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	34	45
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

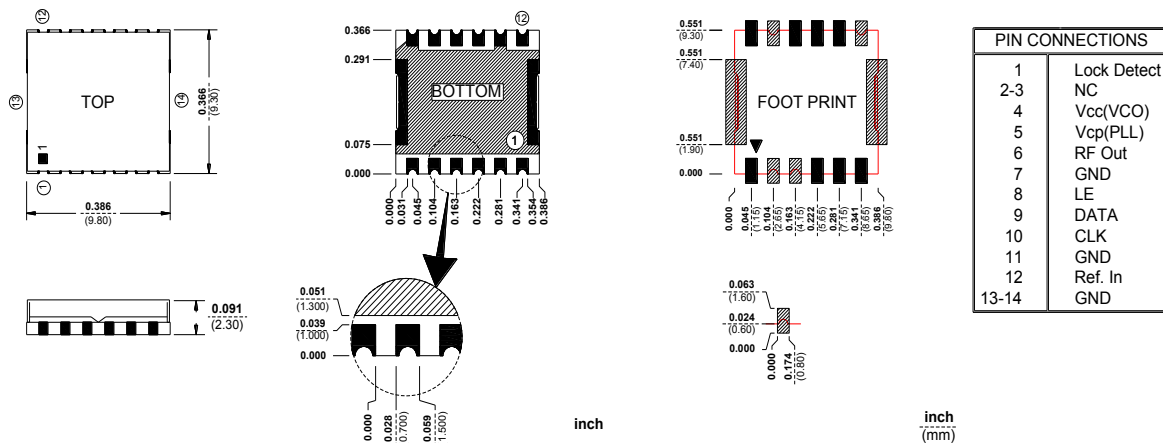

Harmonic Suppression

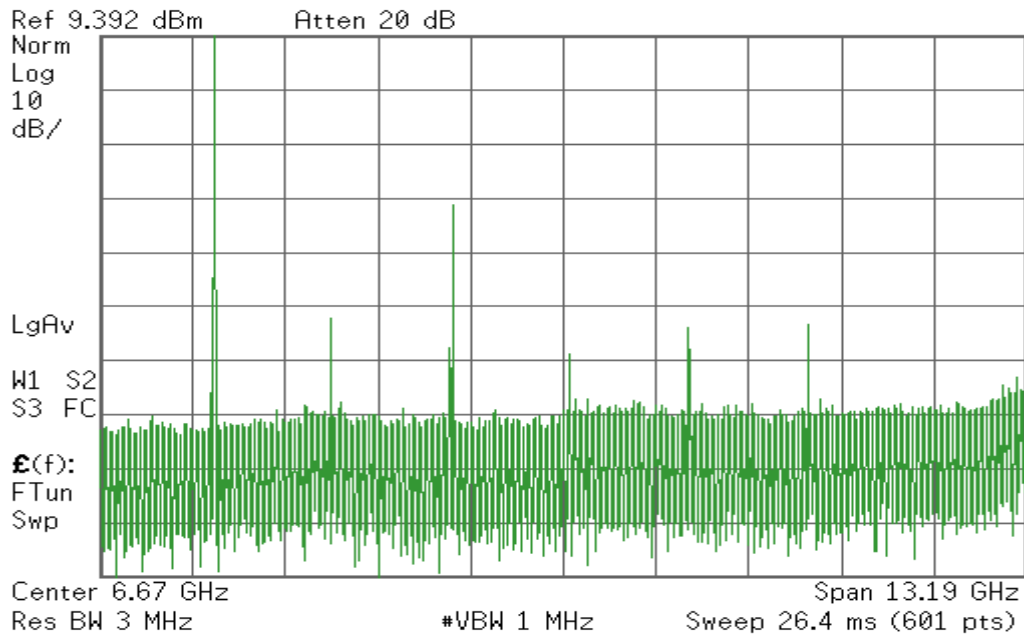

Sideband Spurious Suppression

