



SMP Male Connector Solder Attachment 2 Hole Flange
Mount Pin Terminal 0.282 Inch Hole Spacing

TECHNICAL DATA SHEET

PE44938

Configuration

Connector	SMP Male
Connector Specification	DESC 94007
Connector Interface Type	Pin
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	2 Hole Flange

Electrical Specifications

Impedance	50 Ohms
-----------	---------

Mechanical Specifications

Size

Length	0.307 in [7.8 mm]
Width/Dia.	0.165 in [4.19 mm]
Height	0.4 in [10.16 mm]
Weight	0.082 lbs [37.19 g]

Connector

Type	SMP Male
Contact Material and Plating	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204
Body Material and Plating	Passivated Stainless Steel
Body Plating Specification	AMS-QQ-P-35
Dielectric Type	PTFE


Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Male Connector Solder Attachment 2 Hole Flange Mount Pin Terminal 0.282 Inch Hole Spacing PE44938](#)

PE44938 CAD Drawing

SMP Male Connector Solder Attachment 2 Hole Flange
Mount Pin Terminal 0.282 Inch Hole Spacing

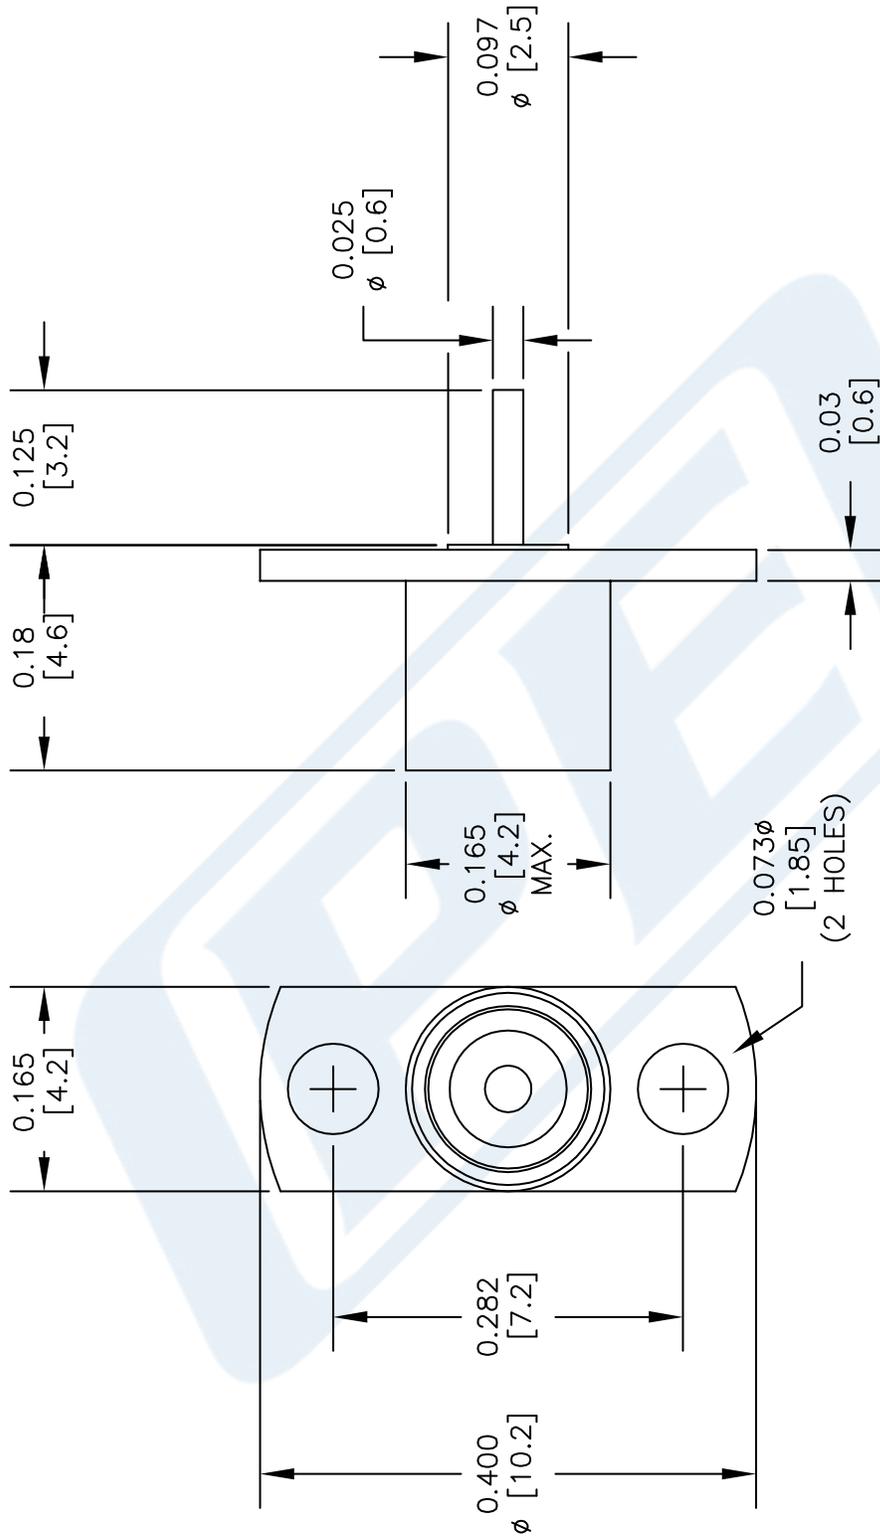

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE44938

FSCM NO. 53919

CAD FILE 103013

SCALE N/A

SIZE A

150

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com