
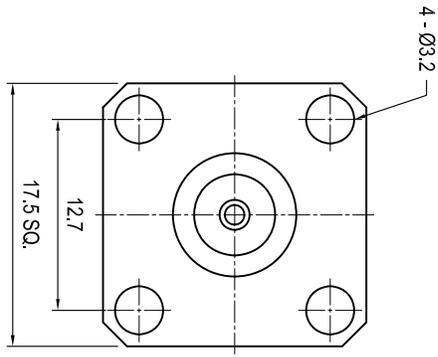


Revisions		Approved	Date
Description/Approved/Date	Checked	M.H.	Date
	Drawn	T.J.A.	04/04/05

Tolerances	
1-20=+/-0.2	
20-30=+/-0.3	
30-40=+/-0.4	
40-50=+/-0.5	
50-100=+/-0.75	
100-300=+/-1.5	
Angles=+/-1	

Dimensions are in Millimeters

NOTES (plating thickness in microinches):			
1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per WW-1-799	10. Per QQ-P-35	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			

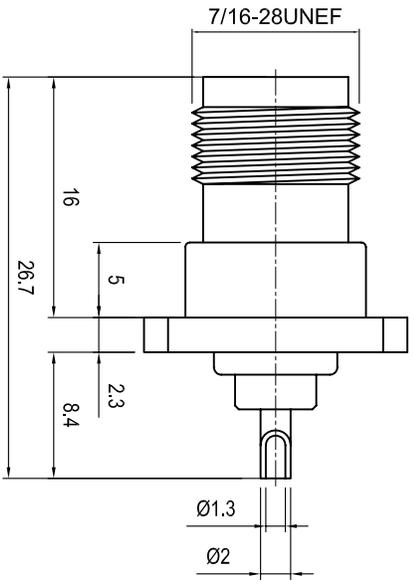

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Female	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule		
Gasket		
Hex Nut		
Lock Washer		

Description		
TNC 4 hole flange panel mount jack with solder cup.		
		
Lighthouse Technologies, Inc. 9511 Ridgely Court, Suite B San Diego, California 92123 Part Number: LTI-TSF42NT		
Scale	Drawing No.	File Name
1:1	TSF42	TSF42