

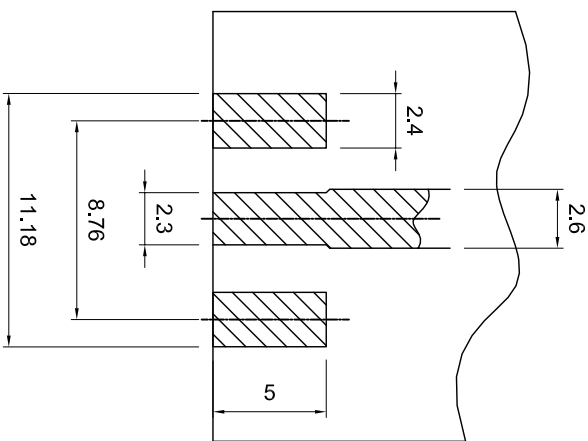


Tolerances		Revisions		Approved	
1-20=+/-0.2		Description/Approved/Date		M.H.	Date
20-30=+/-0.3			Checked	M.H.	Date
30-40=+/-0.4			Drawn	M.D.L.	Date
40-50=+/-0.5					
50-100=+/-0.75					
100-300=+/-1.5					
Angles=+/-1					
Dimensions are in Millimeters					
NOTES (plating thickness in micro-inches):					
1. Per QQ-B-626	6. Per ZZ-R-765	5. Per MIL-P-19488	9. Nickel pl. 100 min. over		
2. Per QQ-S-764	7. Per WW-1-799		copper strike		
3. Per QQ-C-530	8. Gold pl. 5 min. over		10. Per QQ-P-35		
4. Per QQ-B-750	nickel pl. 50 min. over		11. Gold pl. 20 min. over		
	copper strike		nickel pl. 50 min. over		
			copper strike		



LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: M	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	--	--
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Brass, Note 1

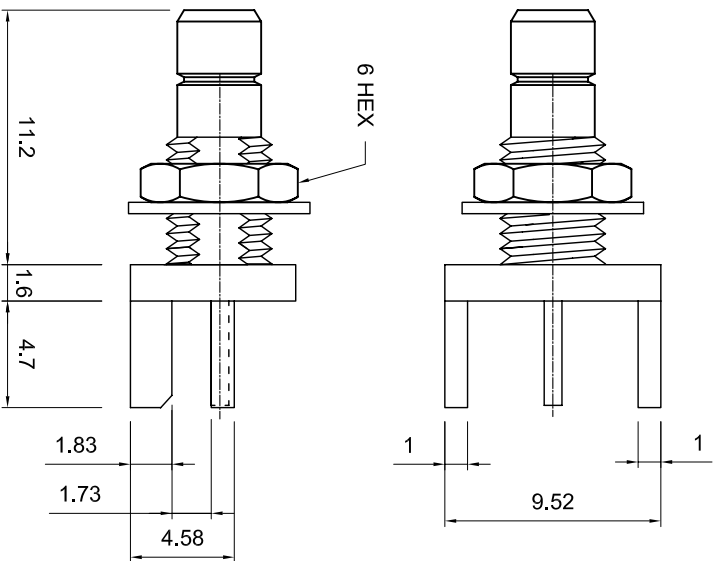

Lighthouse Technologies, Inc.
9511 Ridgelyaven Ct, Suite B
San Diego, California 92123
Part Number:
LTI-SBSF553MGT

Description SMB end launch PCB bulkhead jack for .062 board, medium barrel,		
wide flange, Gold plated brass body, Teflon dielectric.		
Scale 1:1	Drawing No. SBSF553MGT	File Name LTI-SBSF553MGT