

2 Way-0° 50Ω

1420 to 1660 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	5
PORT 1	1
PORT 2	3
GROUND	2,4,6


Outline Drawing

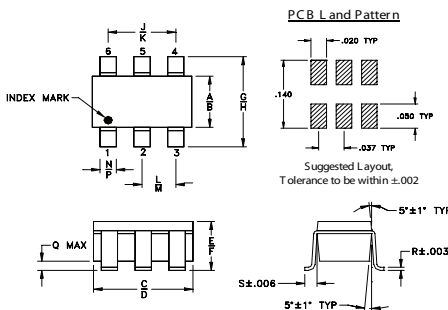

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70

K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

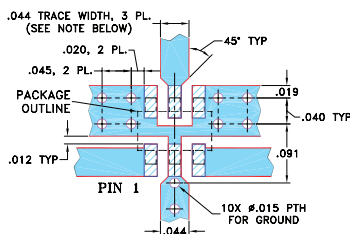Demo Board MCL P/N: TB-374
Suggested PCB Layout (PL-232)

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.4 dB typ.
- good isolation, 28 dB typ.
- good output VSWR, 1.15:1 typ.
- good input VSWR, 1.25:1 typ.
- excellent power handling, 1.5W
- small size
- aqueous washable

Applications

- GPS
- mobile satellite
- PDC
- defense & aeronautical




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Typ.	Min.	Typ.	Max.			S-Port Typ.	Output Ports Typ.
1420-1660	28	19	0.4	0.7	3	0.2	1.25	1.15

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1420.00	3.36	3.36	0.00	22.04	0.59	1.20	1.04	1.04
1450.00	3.36	3.37	0.01	24.35	0.60	1.19	1.06	1.06
1460.00	3.36	3.37	0.01	25.28	0.61	1.19	1.07	1.07
1470.00	3.37	3.37	0.01	26.31	0.61	1.19	1.08	1.08
1480.00	3.37	3.37	0.01	27.48	0.62	1.19	1.09	1.09
1500.00	3.37	3.38	0.01	30.39	0.62	1.20	1.11	1.10
1520.00	3.38	3.38	0.01	34.57	0.64	1.20	1.12	1.12
1550.00	3.39	3.40	0.01	42.25	0.65	1.22	1.15	1.15
1560.00	3.39	3.40	0.01	39.67	0.66	1.22	1.16	1.16
1570.00	3.39	3.40	0.01	36.43	0.66	1.23	1.17	1.17
1580.00	3.40	3.41	0.01	33.81	0.66	1.23	1.18	1.18
1600.00	3.41	3.42	0.01	29.95	0.67	1.25	1.20	1.20
1620.00	3.42	3.43	0.01	27.22	0.68	1.27	1.22	1.22
1650.00	3.44	3.45	0.01	24.27	0.69	1.30	1.25	1.25
1660.00	3.45	3.46	0.01	23.48	0.69	1.31	1.26	1.26

1. Total Loss = Insertion Loss + 3dB splitter loss.

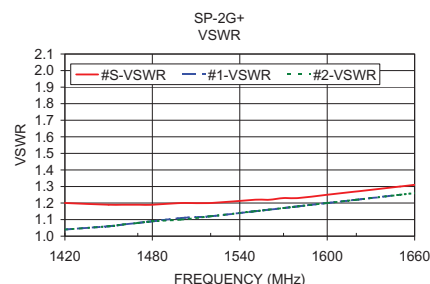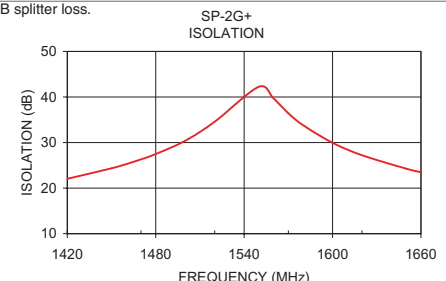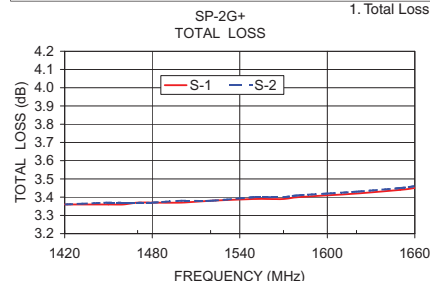

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (<100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at www.minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. A
M127604
ED-12593/2+
SP-2G+
RS/LC/CP/AM
120509