

REV	DATE	APPROVED
1	2/7/08	
REVISIONS		
DATE	DESCRIPTION	BY
-	ORIGINAL RELEASE	

**Description:**

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

**Specifications:**

- Frequency Range: 8.0 to 18.0 GHz
- Gain: 30dB Typ.
- Gain Flatness: +/-1.25dB Max.
- Noise Figure: 3.0dB Typ.
- OP1dB: 12dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 130mA Max.

**Features:**

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C

**Available Options:**


- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

**Environmental Ratings:**


- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)
- 55 to +125 Deg. C (Storage)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

**PE2 HOUSING WITH CARRIER**

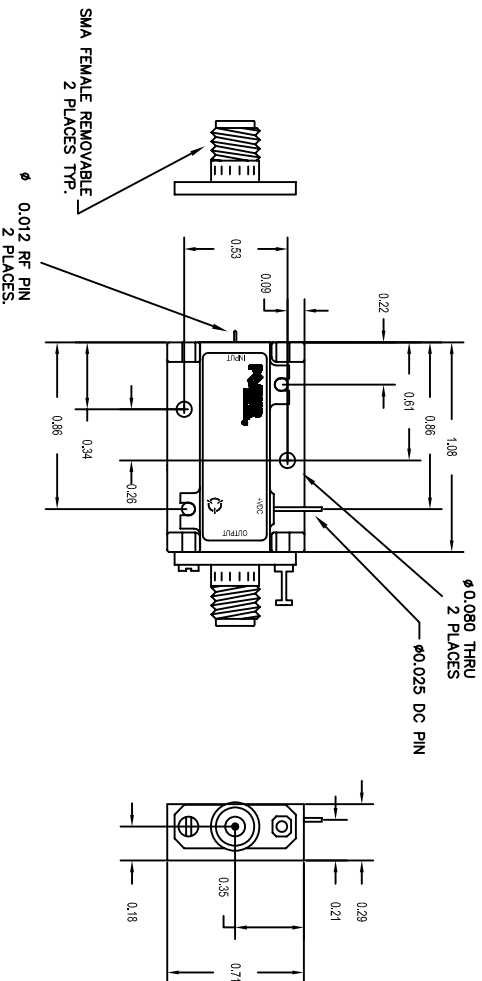

**PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)**

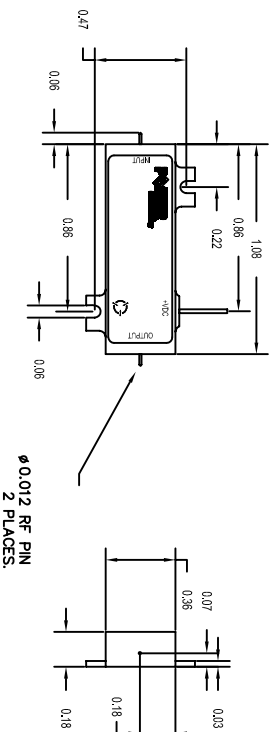

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS .XX ± 0.010  
DECIMALS .XXX ± 0.005  
ANGLES ±

MATERIAL:		6061-T6 Aluminum	
FINISH:		Gold Plate over Nickel	
DO NOT SCALE DRAWING			
DATE	APPROVALS	DATE	APPROVALS
2/21/08	K. MASON		
PART NO.		5715 Industry Lane, Unit 11	
TITLE		FREDERICK, MARYLAND	
PRODUCT FEATURE		PE2-30-8801880-3RD-14-12-SFF	
REV	DATE	REV	DATE
B	11K53	WEB - MODEL	A
REV		REV	
1 OF 1		1 OF 1	