
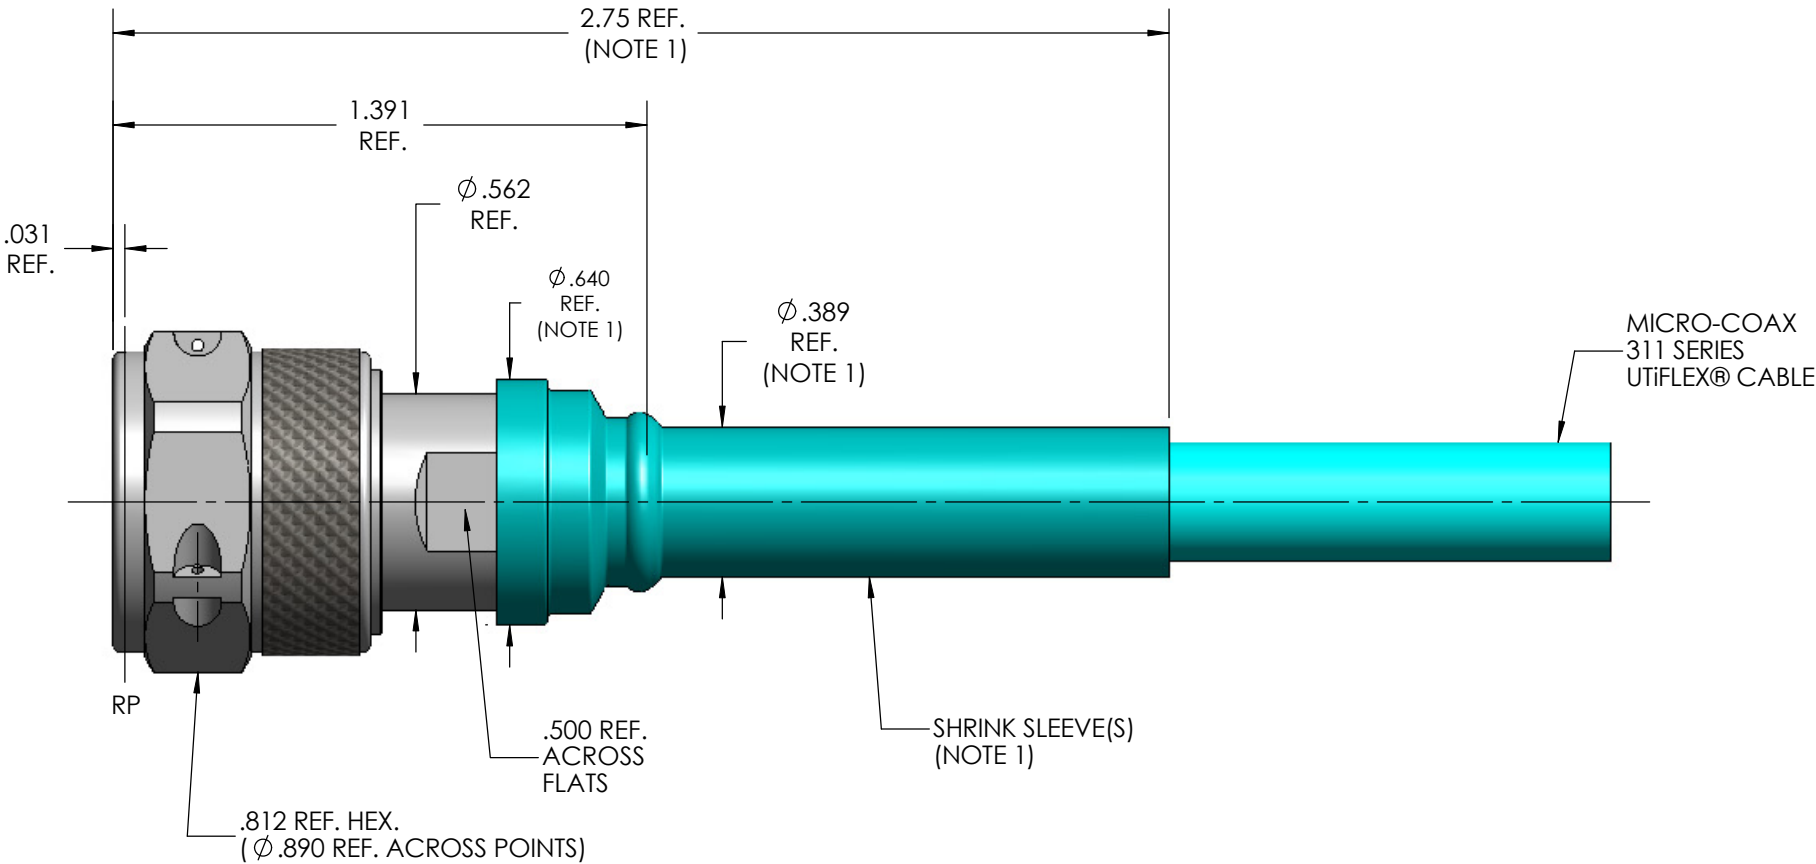


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348A, NOTICE 3, FIGURE 304-1
SLANT SHEET	MIL-PRF-39012/1
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
COUPLING PROOF TORQUE	25 IN-LBS. MIN.
COUPLING NUT RETENTION	100 LBS. MIN.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MAX.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS SHEET 1	37.63 GRAMS NOM.
MASS SHEET 2	50.45 GRAMS NOM
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	12.4 GHz
VSWR DC - 12.4 GHz	1.16:1MAX.
INSERTION LOSS	0.045 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1675 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 12.4 GHz	-90 dB MIN.
CORONA	430 Vrms. MIN. @ 70,000 FT.
RF HIGH POTENTIAL	1125 Vrms. MIN.
CONTACT RESISTANCE (INNER)	1.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	0.2 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-62°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER QQ-N-290.
FORWARD BEAD	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
BODY, SLEEVE, CLAMP NUT, & COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967 OR SAE- AMS-2700
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
GASKET	SILICONE RUBBER PER ZZ-R-765
CONTACT RING	BRASS, PER ASTM-B-16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER QQ-N-290
FORWARD INSULATOR	TFE FLUOROCARBON, PER ASTM-D-1710
ELBOW	STEEL, CORROSION RESISTANT, PER ASTM-A-269, UNS NO. S30400 (TP 304) OR S30403 (TP 304L), PASSIVATED PER ASTM-A-967
APPLICATION	
CABLE(S)	311 SERIES CABLE
INSTALLATION	PER CONFIGURATOR
CONNECTOR CODE SHEET 1	703
CONNECTOR CODE SHEET 2	7G3


THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

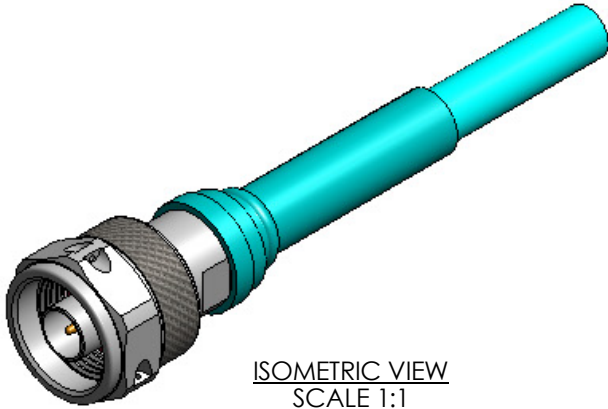

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.
2. SEE SHEET 2 FOR 90° ELBOW CONFIGURATION.

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		<div>MICRO-COAX[®] <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i></div>					
		DWN.	JMK	07/19/05							
		CHKD.	CCF	9/12/12							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		N PLUG, SAFETY WIRE HOLES, 311 SERIES									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.		FSCM NO. 64639	SIZE B	SCALE 2:1	SHEET NO. 1 OF 2	DRAWING NO. SD904400	REV C		
.XXX	± .005										
.XXXX	± .0010										
ANGLES	± 2°										

ALL DIMENSIONS AND TOLERANCES IN INCHES UNLESS OTHERWISE SPECIFIED.		INITIALS		DATE		 MICRO-COAX[®] <i>Leading the way in transmission line solutions.</i> <i>Copyright Micro-Coax, Inc.</i>			
		DWN.	SRS	08/04/04					
		CHKD.	CCF	9/12/12					
		APPVD.							
.XX	± .02	TITLE N PLUG, SAFETY WIRE HOLES, 90° ELBOW, 311 SERIES							
.XXX	± .005								
.XXXX	± .0010								
ANGLES	± 2°								
		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV.		
		64639	B	1.5:1	2 OF 2	SD904400	C		