



SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal, .481 inch Hole Spacing, .050 inch Diameter, Gold Plated

TECHNICAL DATA SHEET

PE4128

Configuration

Connector	SMA Female
Connector Specification	MIL-C-39012
Connector Interface Type	Stub
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	2 Hole Flange

Electrical Specifications

Frequency Range	DC to 12.4 GHz
Impedance	50 Ohms
Maximum Operating Voltage	500 Volts
Dielectric Withstanding Voltage	1,000 Vrms

Mechanical Specifications

Temperature	-65 to +165 deg C
Operating Range	
Size	
Length	1.079 in [27.41 mm]
Width/Dia.	0.224 in [5.69 mm]
Height	0.625 in [15.88 mm]
Weight	0.006 lbs [2.72 g]

Connector

Type	SMA Female
Contact Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Stainless Steel, Gold
Dielectric Type	PTFE

Compliance Certifications

(visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

6/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal, .481 inch Hole Spacing, .050 inch Diameter, Gold Plated PE4128](#)



SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal, .481 inch Hole Spacing, .050 inch Diameter, Gold Plated

TECHNICAL DATA SHEET

PE4128

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal, .481 inch Hole Spacing, .050 inch Diameter, Gold Plated from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal, .481 inch Hole Spacing, .050 inch Diameter, Gold Plated PE4128](#)


URL: <http://www.paternack.com/sma-female-standard-stub-terminal-connector-pe4128-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE4128 CAD Drawing

SMA Female Connector Solder Attachment 2 Hole Flange Stub Terminal,
.481 inch Hole Spacing, .050 inch Diameter, Gold Plated

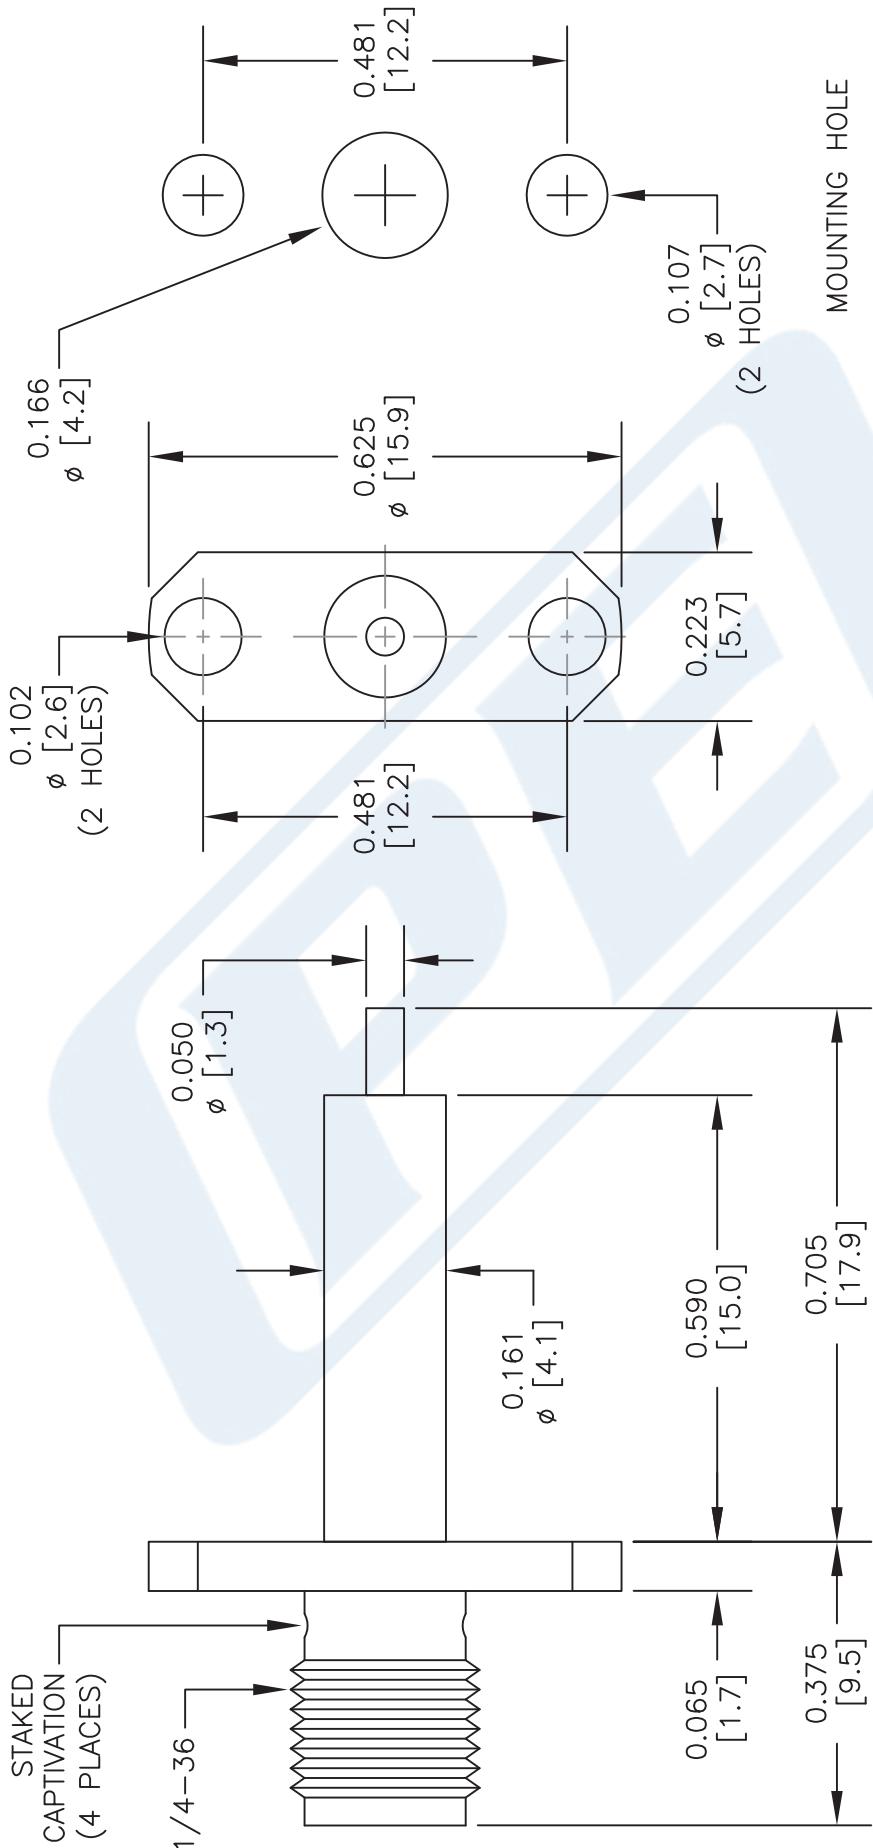



Pasternack Enterprises, Inc.
P O Box 16759 | Irvine | CA | 92623

1. C. BOX 10-39 | N. VILLE | CA | 92023
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pastermack.com | **E-Mail:** sales@pastermack.com

DWG TITLE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO.	53919	CAD FILE	081914	SCALE	N/A	SIZE	A	2233
----------	-------	----------	--------	-------	-----	------	---	------