

ADAPTERS, BETWEEN SERIES TYPE N / BNC

**DC - 8 GHz
PRECISION**

api 
technologies corp.
> INMET

MODELS: 5130, 5131, 5132, 5133

SPECIFICATIONS:

Electrical:


Frequency Range _____ DC – 8 GHz
VSWR
DC – 4 GHz _____ 1.10:1 Max.
4 – 8 GHz _____ 1.15:1 Max.
Impedance _____ 50 Ohms
Operating Temp. Range _____ –65°C to +125°C

Mechanical:

Type N Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper


Model Number: **5130**

Type N Male / BNC Male

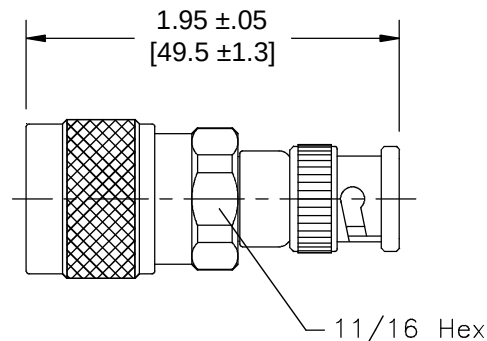


Model Number: **5131**

Type N Male / BNC Female

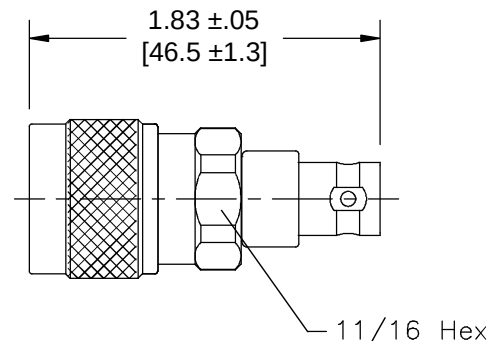


Model Number: **5132**

Type N Female / BNC Male

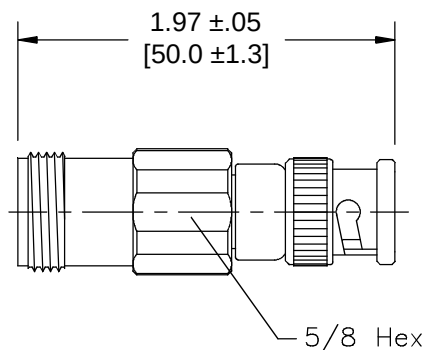

Model Number: **5133**

Type N Female / BNC Female

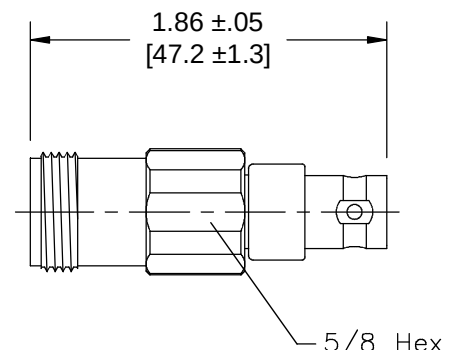

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.

5130; REV A

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com