

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



MECHANICAL
 CONTACT: BREAK BEFORE MAKE
 ACTUATOR: MOMENTARY
 SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)
 ACTUATOR CURRENT: 0.600 A MAX @ 28.0 Vdc
 POWER HANDLING: 200 WCW @ 1.0 GHz

ENVIRONMENTAL
 OPERATING TEMP: -54°C to +90°C
 SINE VIBRATION: 30 G'S rms
 LIFE : 1,000,000 CYCLES
 RANDOM VIBRATION: 20 G'S rms

SPECIFICATION:

	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4
FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40
ISOLATION (dB):	90	80	80	70
IMPEDANCE:	50 OHMS			

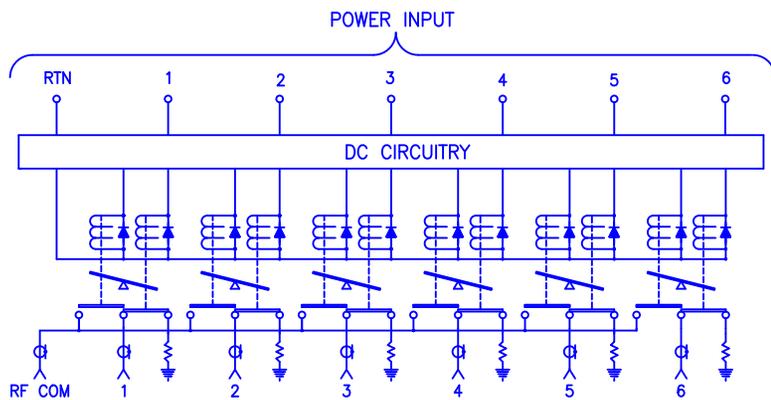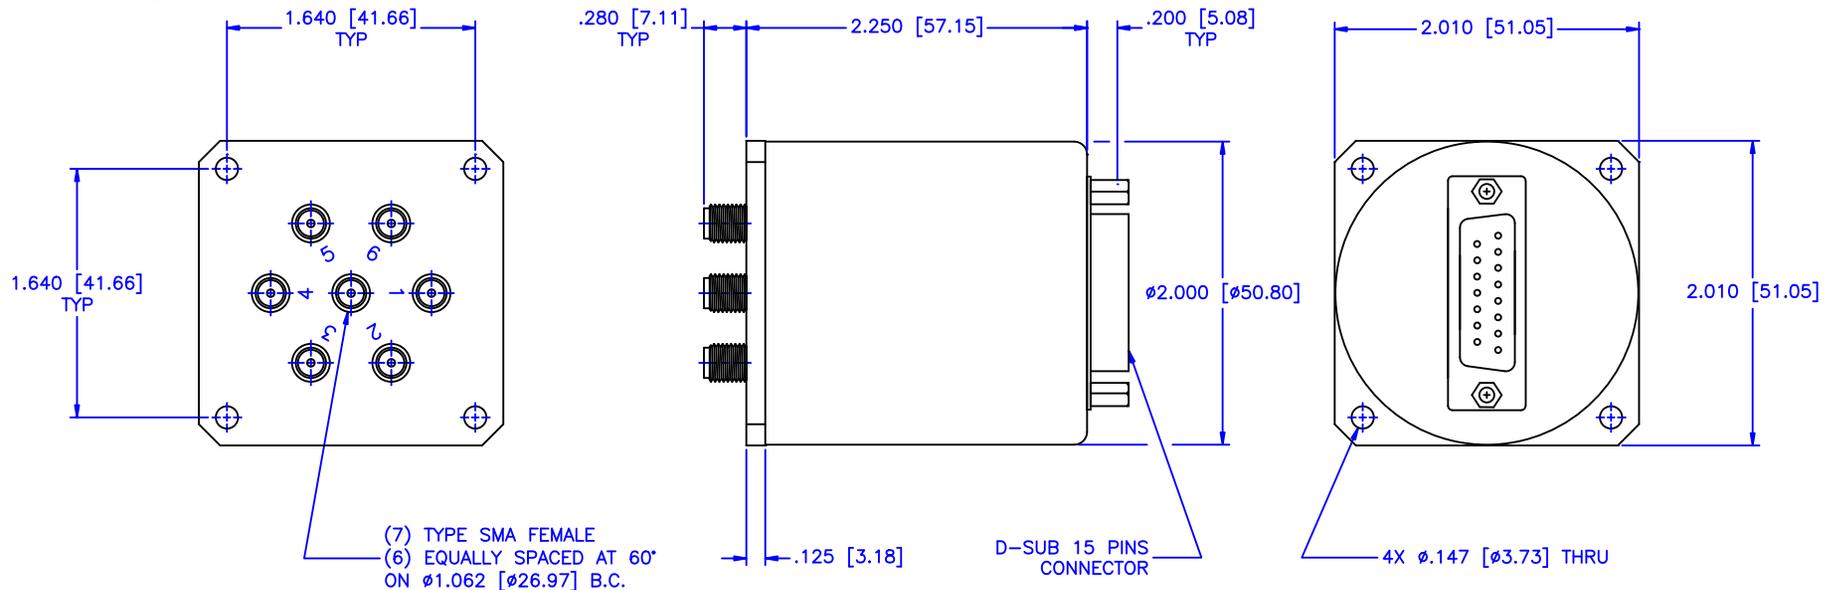

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-05-2001		DRAWING TITLE: ELECTROMECHANICAL SWITCHES
APPROVED: T. Nguyen		DATE: 04-05-2001		
CAGE CODE: OD2L5		SIZE: N/A		PART NO.: V6-6-MS/C
DO NOT SCALE THE DRAWING		REV: N/A		
DWG NO.: 81711		THIRD ANGLE PROJECTION		