



WR-90 Standard Gain Horn Antenna Operates From 8.2 GHz to 12.4 GHz With a Nominal 10 dB Gain WR-90 Input

TECHNICAL DATA SHEET

PE9856-10

WR-90 Standard Gain Horn Antenna Operates From 8.2 GHz to 12.4 GHz With a Nominal 10 dB Gain WR-90 Input

Configuration

Design	WR-90 Standard Gain Horn
Frequency Range, GHz	8.2 to 12.4
Polarization	Linear
Interface 1	WR-90

Electrical Specifications

Nominal Gain, dB	10
------------------	----

Mechanical Specifications

Size

Length, in [mm]	1.82 [46.23]
Width, in [mm]	1.695 [43.05]
Height, in [mm]	1.63 [41.4]

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

2 Dimensional OML Drawing	PE9856-10
Notes:	Values at 25 °C, sea level

WR-90 Standard Gain Horn Antenna Operates From 8.2 GHz to 12.4 GHz With a Nominal 10 dB Gain WR-90 Input from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn Antenna Operates From 8.2 GHz to 12.4 GHz With a Nominal 10 dB Gain WR-90 Input PE9856-10](http://www.pasternack.com/standard-gain-horn-waveguide-size-wr90-pe9856-10-p.aspx)

URL: <http://www.pasternack.com/standard-gain-horn-waveguide-size-wr90-pe9856-10-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




PE9856-10 CAD Drawing

WR-90 Standard Gain Horn Antenna Operates From 8.2 GHz to 12.4 GHz With a Nominal 10 dB Gain WR-90 Input

WR90	Dimension	Inches	mm
A		1.220	30.99
H		1.630	41.40
J		1.280	32.51
K (±0.003)		0.900	22.86
L (±0.003)		0.400	10.16

AA	0.164	4.17
AB	2.010	51.05
AC	1.270	32.26
AD	1.646	41.81

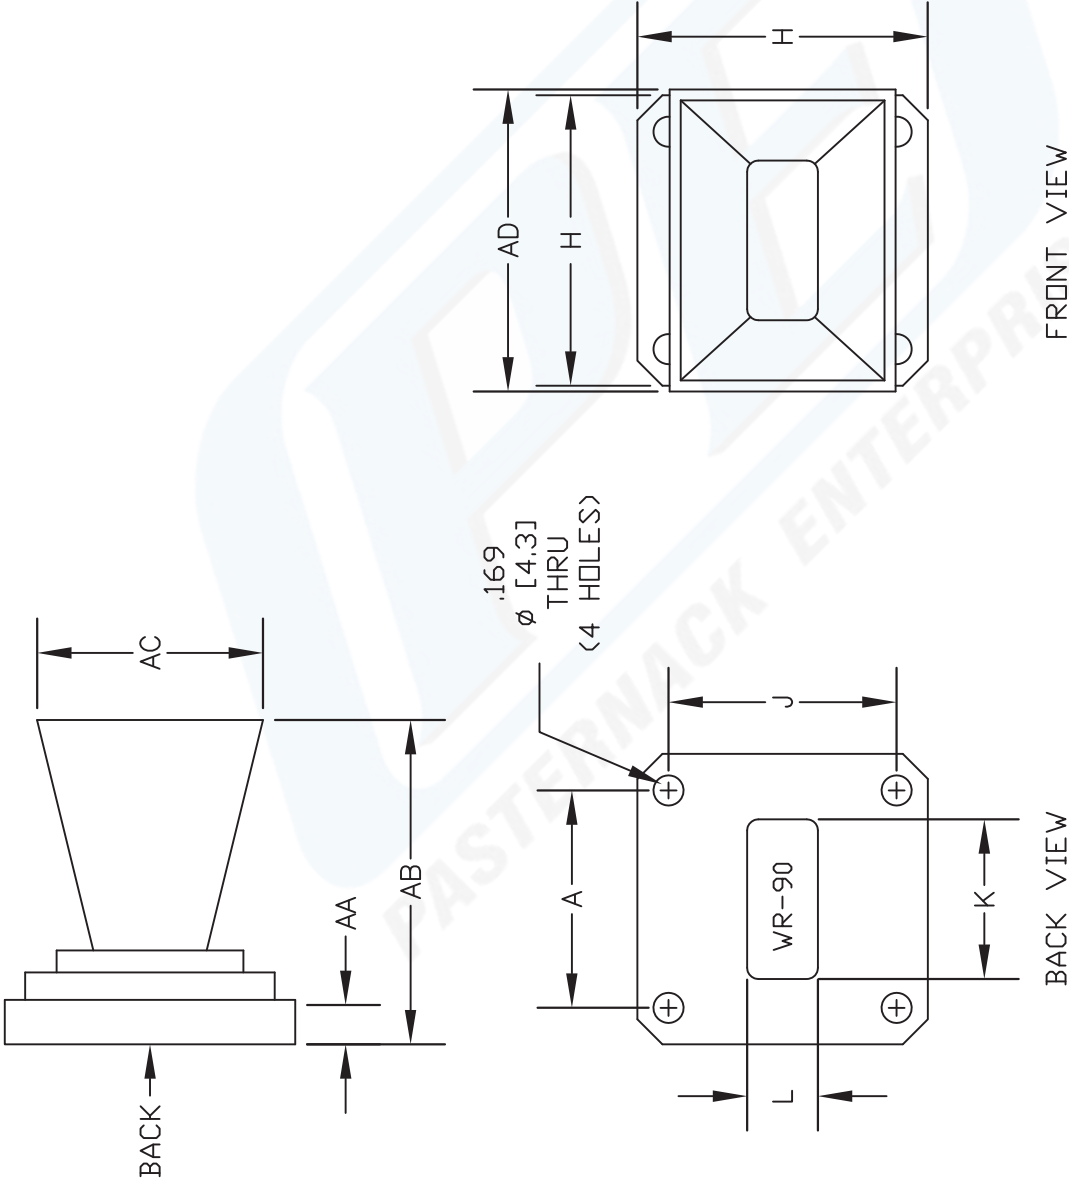

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9856-10

REV. B FSCM NO. 53919 CAD FILE REV. B SCALE N/A SIZE A 127

Pasternack
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com