

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED


MECHANICAL
 CONTACT: BREAK BEFORE MAKE
 ACTUATOR: FAILSAFE
 SWITCHING SPEED: 20 mSEC MAX

ELECTRICAL
 ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)
 ACTUATOR CURRENT: 0.250 A MAX @ 28.0 Vdc
 POWER HANDLING: 200 WCW @ 1.0 GHz


ENVIRONMENTAL
 OPERATING TEMP: -54°C to +90°C
 SINE VIBRATION: 30 G'S rms
 LIFE : 1,000,000 CYCLES
 RANDOM VIBRATION: 20 G'S rms

SPECIFICATION



FREQUENCY RANGE (GHz):	DC–2.0	2.0–4.0	4.0–8.0	8.0–12.4	12.4–18.0
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40	0.50
ISOLATION (dB):	90	80	80	70	60
IMPEDANCE (OHMS):	50	50	50	50	50

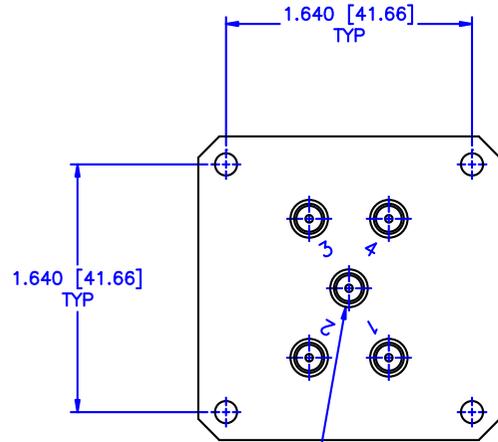

(5) TYPE SMA FEMALE
 (4) EQUALLY SPACED AT 60°
 ON $\phi 1.062$ [$\phi 26.97$] B.C.

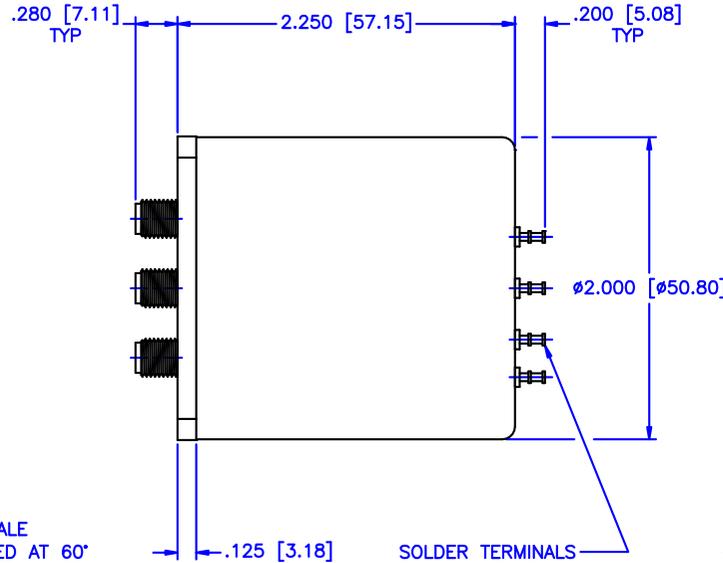

SOLDER TERMINALS

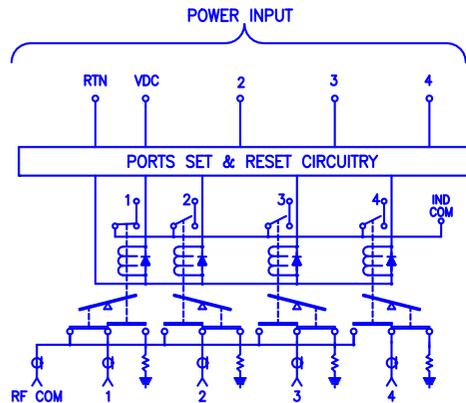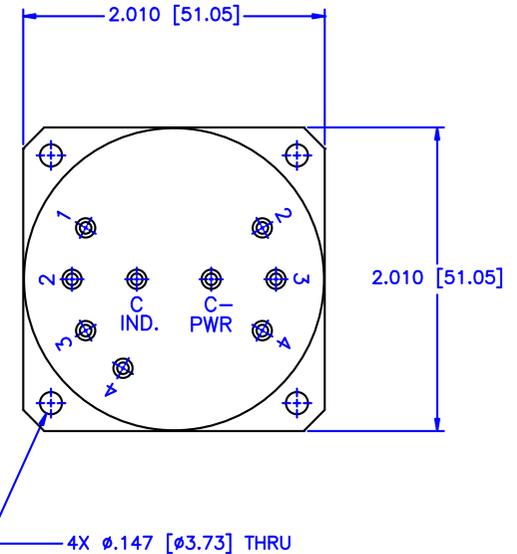

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
DRAWN: Paiboon Luekhamhan			SHEET: N/A
DATE: 02-26-2009		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: ELECTROMECHANICAL SWITCHES
APPROVED: T. Nguyen			DATE: 02-26-2009
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 84220
			DO NOT SCALE THE DRAWING