

451021

90 - 100 MHz

Features

- Low Phase Noise
- Low Spurious Outputs
- High Reliability
- Internal Reference Model

Specifications

CHARACTERISTIC	TYPICAL Ta = +25 °C	MIN/MAX Ta = -10°C to +60 °C
Frequency (MHz)	90 - 100	90 - 100
Output Power (dBm)	+13	0 / +17.0
Step Size	1 MHz	1 Hz / 1 MHz
Stability (ppm)	±10	—
Harmonics (dBc)	-25	-20 Max.
Spurious (dBc)	-70	—
Phase Noise (90 MHz)	-57 dBc/Hz @ 10 Hz -87 dBc/Hz @100 Hz -97 dBc/Hz @ 1 kHz -97 dBc/Hz @ 10 kHz -120 dBc/Hz @ 100 kHz -145 dBc/Hz @ 1 MHz	—
Power Vdc mA	+15 150	+15 —

NOTE: Care should always be taken to effectively ground the case of each unit.

Absolute Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to +100 °C

Storage Temperature -62°C to +125 °C


Case Temperature +125 °C

DC Voltage +24 Volts

Spectrum Microwave can design a synthesizer to meet your requirements, from low-cost surface mount commercial units to complex multiple conversion designs for military and space applications.

We have delivered units with step sizes from 0.002 Hz to 200 MHz, 5-microsecond switching speeds, automatically switched back-up references, direct digital synthesis, and many other special features.

Typical Performance Data

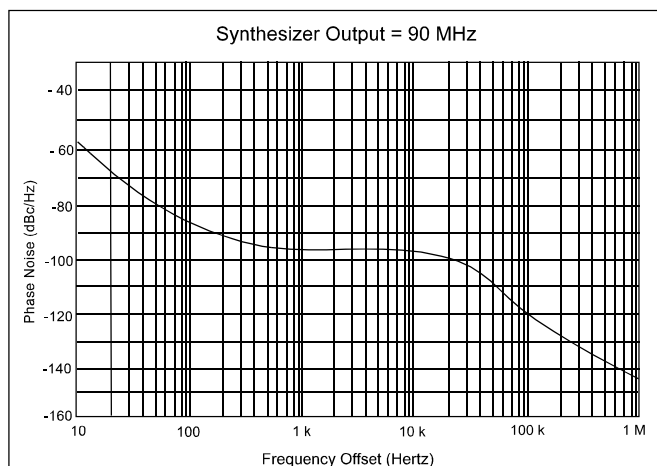

Mechanical Outline

