

High Frequency Ceramic Solutions

2450 MHz Band Pass Filter

P/N 2450BP15H0100

Detail Specification: 08/29/08

Page 1 of 2

General Specifications

Part Number	2450BP15H0100
Frequency (MHz)	2400 - 2500
Attenuation (min.)	25 dB @ 1200 - 1300 MHz
Attenuation (min.)	10 dB @ 2000 MHz
Attenuation (min.)	12 dB @ 3000 MHz
Attenuation (min.)	30 dB @ 3600 - 3800 MHz
Attenuation (min.)	34 dB @ 4800 - 5000 MHz
Insertion Loss	1.5 max.@ 25°C, 1.8 max.@ -40~85°C
Return Loss	9.5 dB min.

Impedance	50 Ω
Input Power	500 mW max.
Reel Quantity	4,000
Operating Temperature	-40 to +85°C
Storage Temp	+5 ~ +35°C, Humidity: 45~75%RH, 12 mos. Max



P/N Suffix	Packaging	Bulk	Suffix = S	Eg. 2450BP15H0100S
	Style	T & R	Suffix = E	Eg. 2450BP15H0100E
	Termination	100% Tin	Suffix = None	Eg. 2450BP15H0100(E or S)
	Style	Tin / Lead	Suffix = /Pb	Eg. 2450BP15H0100(E or S)/Pb

Terminal Configuration

No.	Function
1	GND
2	OUT
3	GND
4	IN

Mechanical Dimensions


	In	mm
L	0.079 $\pm$ 0.006	2.00 $\pm$ 0.15
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.051 $\pm$ 0.006	1.30 $\pm$ 0.15
b	0.012 $\pm$ 0.006	0.30 $\pm$ 0.15
c	0.010 $\pm$ 0.006	0.25 $\pm$ 0.15
d	0.014 $\pm$ 0.006	0.35 $\pm$ 0.15

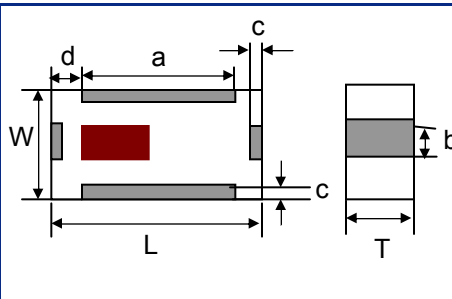

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

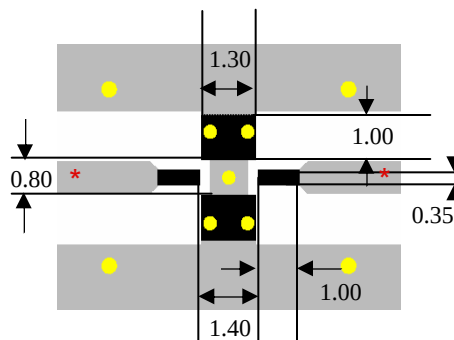

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


2450 MHz Band Pass Filter

P/N 2450BP15H0100

Detail Specification: 08/29/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

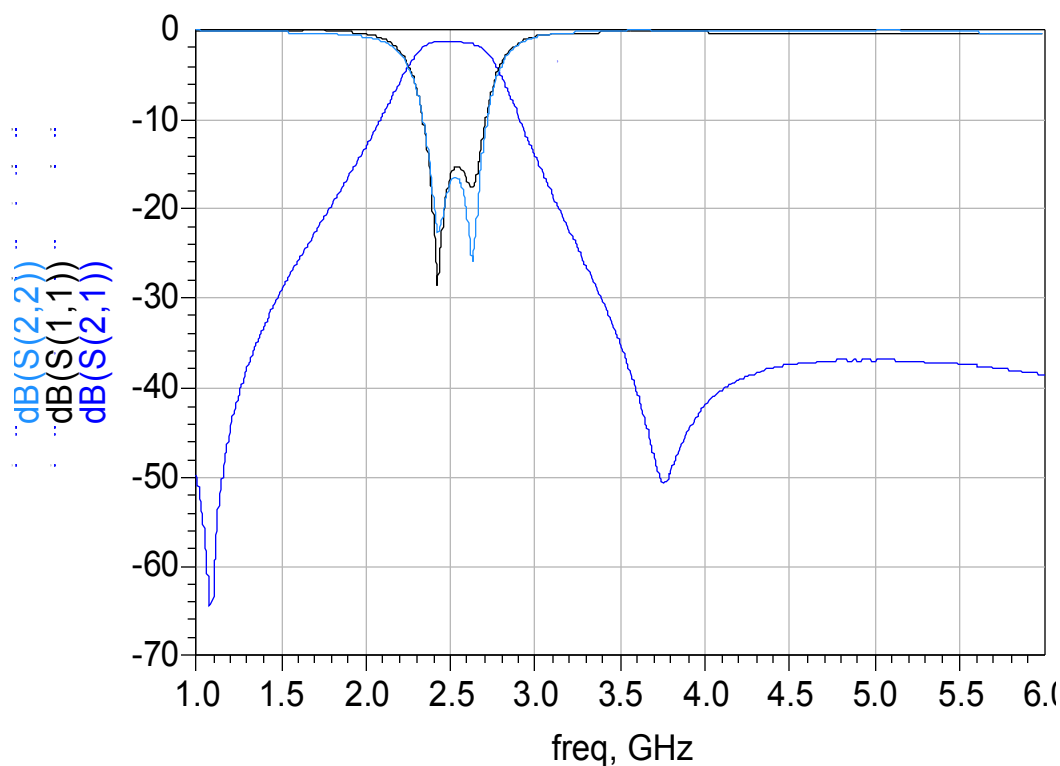

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2007 Johanson Technology, Inc. All Rights Reserved