

REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A	ORIGINAL RELEASE	9/2/11

DESCRIPTION:


PMI MODEL NUMBER DD-1G18G-ZBS-SMF IS A ZERO-BIAS SCHOTTKY DETECTOR THAT OPERATES OVER THE 1.0 TO 18.0 GHz FREQUENCY RANGE.

SPECIFICATIONS:

- FREQUENCY: 1.0 GHz TO 18.0 GHz
- VSWR: 8.0:1 TYPICAL
- FLATNESS: +/-1.0dB TYPICAL
- OUTPUT POLARITY: POSITIVE
- INPUT POWER: 100mW, DERATED TO ZERO AT +150°C
- INPUT CONNECTOR: SMA MALE
- OUTPUT CONNECTOR: SMA FEMALE
- SIZE: PE2 HOSUNG
- FINISH: GOLD PLATED

- DETECTED OUTPUT: SEE BELOW (TYPICAL)


Detected Output vs. RF Input Power

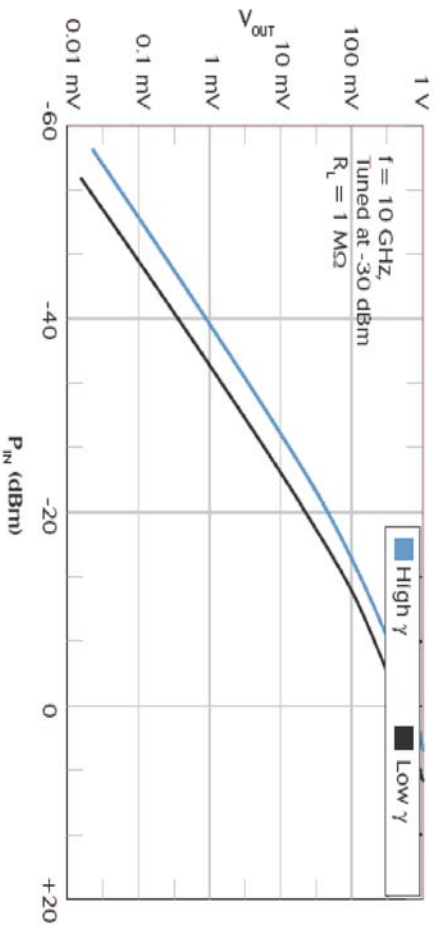

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -45°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

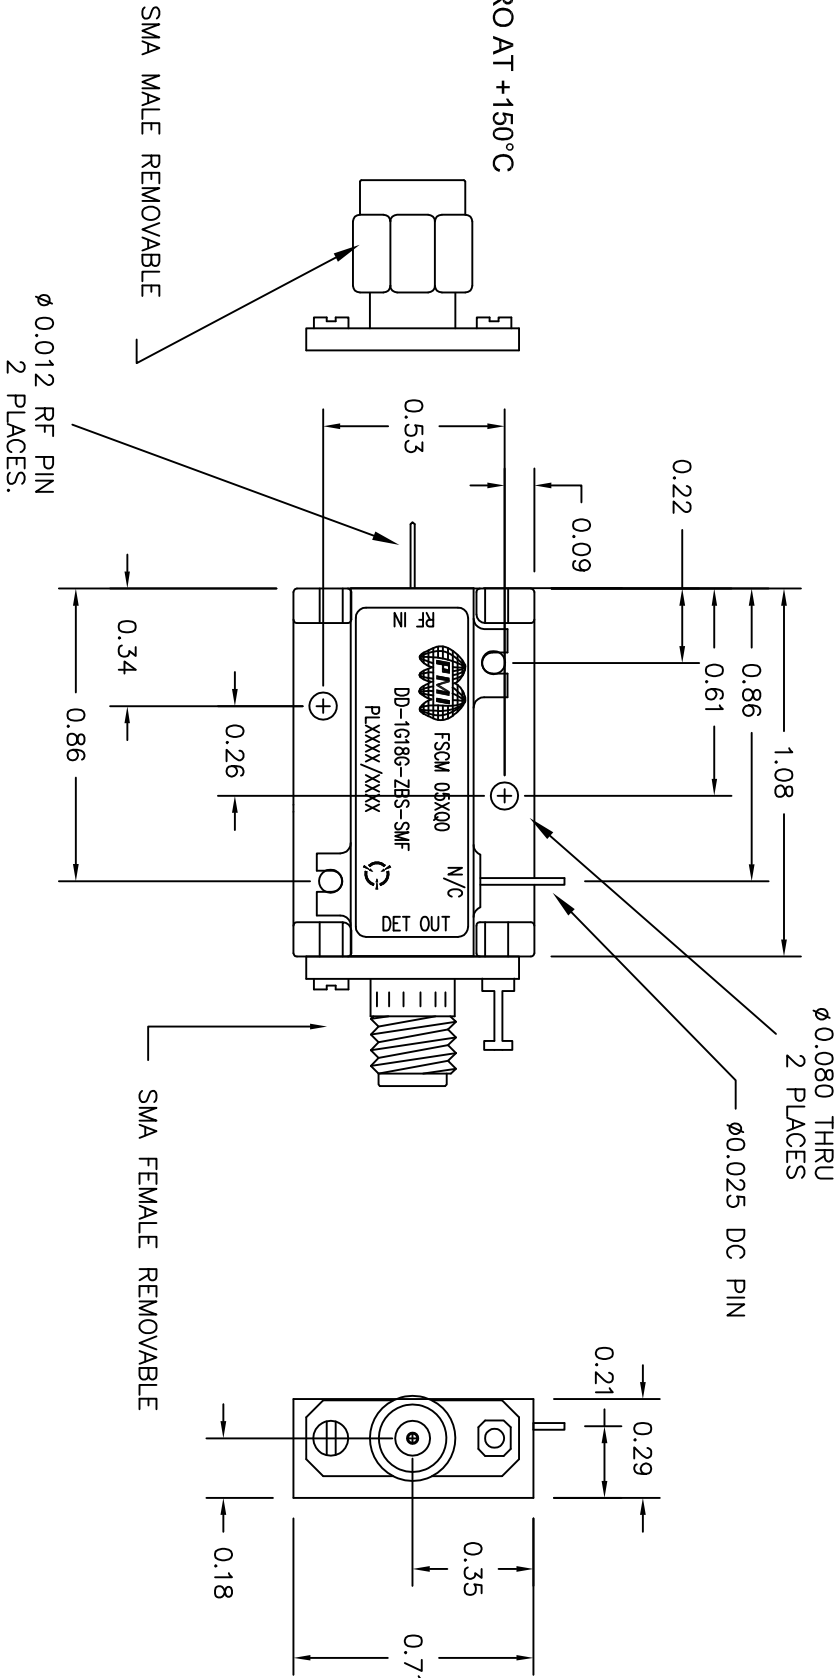

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2008 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN		9/2/11		PRODUCT FEATURE			
CHECKED				DD-1G18G-ZBS-SMF			
ISSUED							
SCALE		N:S		SIZE		REV.	
				A		A	