


Model 40HM1G6AB-44
40 Watts
1GHz-6GHz



The Model 40HM1G6AB-44 is a compact, wide-band, hybrid power amplifier module that covers 1-6GHz. When used with a sweep generator, the Model 40HM1G6AB-44 provides a minimum of 40W of RF power simultaneously from 1-6 GHz.

The Model 40HM1G6AB-44 operates from a single DC voltage and provides 48dB of typical gain with excellent gain flatness, noise figure and low intermodulation distortion. It is designed to have low spurious signals, linearity and is extremely load tolerant which enables it to be used in many RF applications that require linearity, power and wide bandwidth. The circuitry consists of balanced topology which provides good input and output return loss and stability. It is a 50 ohm, cascadable building block and can be used as a microwave power amplifier for both the military and commercial industries.

The amplifier circuitry is based on the latest developments in thin film substrates. It incorporates plated-thru holes and air bridge technology to ensure optimum RF performance. The active devices are in chip form, eutectic-die attached and wire-bonded, providing solid-state reliability and long operating life. Special materials and process techniques were selected to achieve excellent thermo-dissipation and capability for meeting stringent military-environment test requirements. The module should be bolted to a heat sink for good heat dissipation. The RF input/output connectors are field-replaceable.

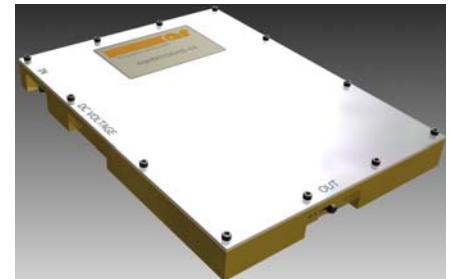

- Solid-state, Class AB design
- +28V DC single bias
- Built-in control monitoring and protection circuits (optional)
- High reliability and ruggedness
- Soft-fail design

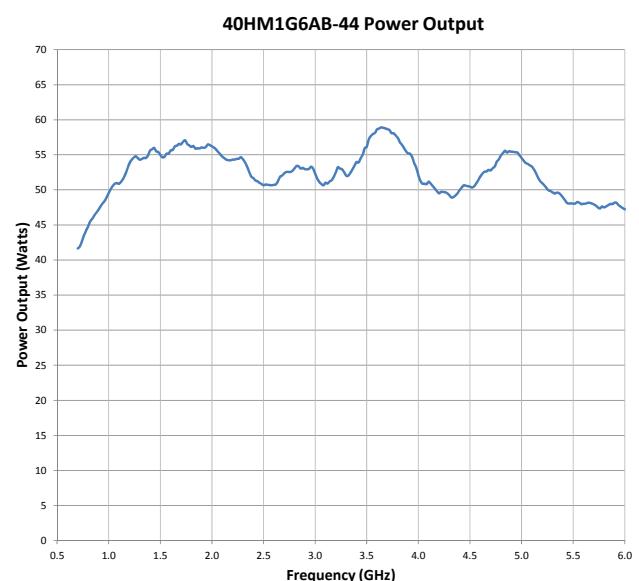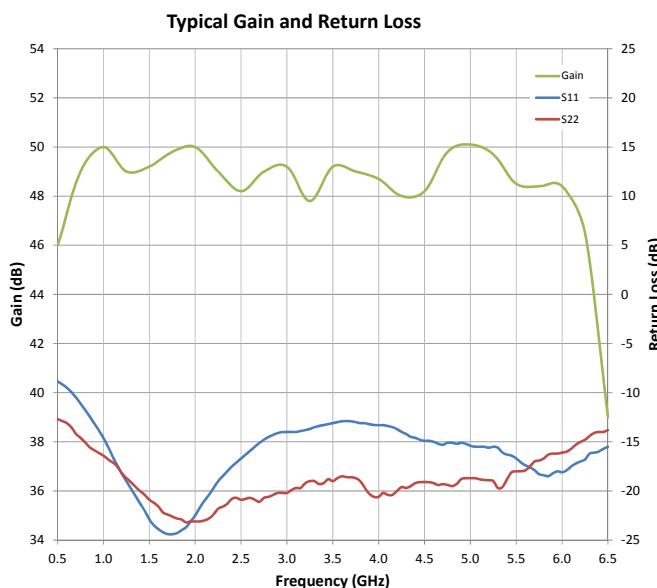

SPECIFICATIONS, 40HM1G6AB-44

RATED POWER OUTPUT	40W minimum
POWER OUTPUT @ 3dB COMPRESSION	
Nominal	50W
Minimum	40W
POWER OUTPUT @ 1dB COMPRESSION	
Nominal	30W
Minimum	20W
SMALL SIGNAL GAIN FLATNESS.....	±1.0 dB typical ±2.0 dB maximum
FREQUENCY RESPONSE	1–6 GHz instantaneously
GAIN	44 dB minimum
NOISE FIGURE	8.5 dB typical
INPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
MISMATCH TOLERANCE @ RATED Pout	3:1 at all load phase.
MODULATION CAPABILITY.....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal.
HARMONIC DISTORTION.....	Minus 15 dBc typical at 40W
THIRD ORDER INTERCEPT POINT	48 dBm typical
DC POWER.....	+27V, $I_{DQ}=3A$, +15V/800mA, -12V, -5V, +5V control
CONNECTORS.....	SMA female
SIZE (W x L x H)	28.6 x 21 x 2.54 cm (11.25 x 8.25 x 1 in)
EXPORT CLASSIFICATION	EAR99

