


SQUARE-WAVE LO BUFFER-AMPLIFIER

A-30

Features

- Frequency Range 5.0 MHz to 30.0 GHz
- Ultra-Broadband
- Surface Mount Package
- +10 dBm Typical Input Power
- +23 dBm Typical Saturated Output Power
- Buffer- Amplifiers for Mixer LO

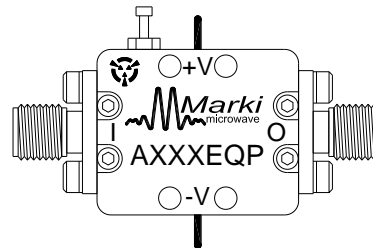

Electrical Specifications - Specifications guaranteed from -30 to +70°C, measured in a 50-Ohm system.

Parameter	Frequency (GHz)	Min	Typ	Max
Input (dBm)	.005-30.0		+10 to +15	
Saturated Output Power (dBm)				
±6 Volts Bias	.005-30.0	+17	+23	
±5 Volts Bias	.005-30.0	+16	+21	
DC Bias Requirements (mA) ¹				
+5.0 to +7.0 Volts			135	150
-3.0 to -6.0 Volts			10	30

¹It is recommended that the negative bias be applied before or concurrent with the positive bias.

Part Number Options

Please specify a package style by adding to the model number.			
Package Style		Examples	
Connectorized	EQP	A-30EQ, A-30EQP	
Surface Mount ¹	EQ	A-30 (Model)	EQP (Package)

¹Connectorized test fixtures available for most carrier and surface mount packages. Contact factory.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.







LO BUFFER-AMPLIFIER

Page 2

A-30

Frequency .005 to 30.0 GHz

Typical Performance

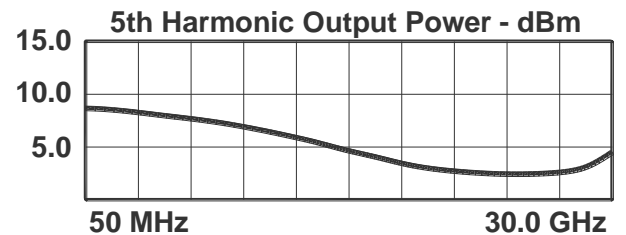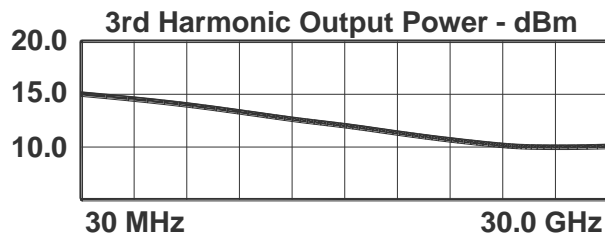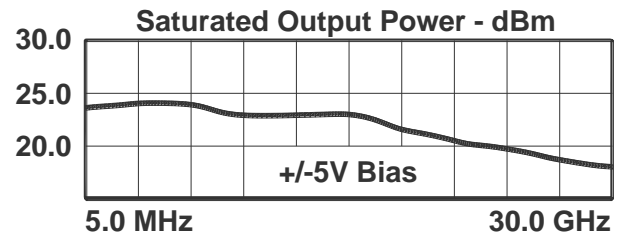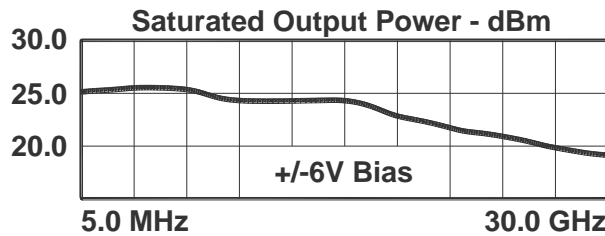

DATA SHEET NOTES:

1. Maximum input power without damage is +17 dBm at +70°C.
2. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com