

Frequency Synthesizer

KSN-915A-119+

50Ω 885 to 915 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

Product Overview

The KSN-915A-119+ is a Frequency Synthesizer, designed to operate from 885 to 915 MHz for base station application. The KSN-915A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

| Feature | Advantages |
|---|---|
| Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -110 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -88 dBc typ.• Reference Spurious: -101 dBc typ. | Low phase noise and spurious improve system EVM (Error Vector Magnitude). |
| Robust design and construction | To enhance the robustness of KSN-915A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.80" x 0.58" x 0.15" | The small size enables the KSN-915A-119+ to be used in compact designs. |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 885 to 915 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"

Applications

- Base station

General Description

The KSN-915A-119+ is a Frequency Synthesizer, designed to operate from 885 to 915 MHz for base station application. The KSN-915A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-915A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



CASE STYLE: DK801

PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M126669
EDR-8478F1
KSN-915A-119+
Category-A1
RAV
100321
Page 2 of 11

Electrical Specifications (over operating temperature -40°C to +85°C)

| Parameters | | Test Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|----------------------------|--------------------|---------------------------------------|-------|-------|------------------|
| Frequency Range | | - | 885 | - | 915 | MHz |
| Step Size | | - | - | 1000 | - | kHz |
| Settling Time | | Within ± 1 kHz | - | 10 | - | mSec |
| Output Power | | - | -2 | 1 | +3 | dBm |
| SSB Phase Noise | | @ 100 Hz offset | - | -90 | - | dBc/Hz |
| | | @ 1 kHz offset | - | -92 | -84 | |
| | | @ 10 kHz offset | - | -110 | -104 | |
| | | @ 100 kHz offset | - | -137 | -130 | |
| | | @ 1 MHz offset | - | -156 | -151 | |
| Integrated SSB Phase Noise | | @100Hz - 1MHz | - | -46 | - | dBc |
| Reference Spurious Suppression | | Ref. Freq. 15 MHz | - | -101 | -80 | dBc |
| Comparison Spurious Suppression | | Step Size 1000 kHz | - | -88 | -75 | |
| Non - Harmonic Spurious Suppression | | - | - | -90 | - | |
| Harmonic Suppression | | - | - | -28 | -22 | |
| VCO Supply Voltage | | 5.00 | +4.75 | +5.00 | +5.25 | V |
| PLL Supply Voltage | | 5.00 | +4.75 | +5.00 | +5.25 | |
| VCO Supply Current | | - | - | 33 | 40 | mA |
| PLL Supply Current | | - | - | 10 | 17 | |
| Reference Input (External) | Frequency | 15 (square wave) | - | 15 | - | MHz |
| | Amplitude | 1 | - | 1 | - | V _{P-P} |
| | Input impedance | - | - | 100 | - | K Ω |
| | Phase Noise @ 1 kHz offset | - | - | -140 | - | dBc/Hz |
| RF Output port Impedance | | - | - | 50 | - | Ω |
| Input Logic Level | Input high voltage | - | 4.20 | - | - | V |
| | Input low voltage | - | - | - | 0.95 | V |
| Digital Lock Detect | Locked | - | 4.35 | - | 5.25 | V |
| | Unlocked | - | - | - | 0.40 | V |
| Frequency Synthesizer PLL | | - | ADF4113 | | | |
| PLL Programming | | - | 3-wire serial 5V CMOS | | | |
| Register Map @ 915 MHz | F_Register | - | (MSB) 010111111000000010010010 (LSB) | | | |
| | N_Register | - | (MSB) 001000000011100100001101 (LSB) | | | |
| | R_Register | - | (MSB) 0001000000000000000111100 (LSB) | | | |

Absolute Maximum Ratings

| Parameters | Ratings |
|--|----------------------------|
| VCO Supply Voltage | 6V |
| PLL Supply Voltage | 6V |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.5V |
| Reference Frequency Voltage | -0.3Vmin, VCC PLL +0.3Vmax |
| Data, Clock, LE Levels | -0.3Vmin, VCC PLL +0.3Vmax |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +100°C |

Permanent damage may occur if any of these limits are exceeded



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com
Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

Typical Performance Data

| FREQUENCY (MHz) | POWER OUTPUT (dBm) | | | VCO CURRENT (mA) | | | PLL CURENT (mA) | | |
|--------------------|-----------------------|-------|-------|---------------------|-------|-------|--------------------|-------|-------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| 885 | 0.60 | 0.79 | 0.79 | 32.49 | 33.85 | 34.80 | 8.74 | 10.81 | 12.66 |
| 888 | 0.60 | 0.79 | 0.78 | 32.48 | 33.85 | 34.80 | 8.78 | 10.84 | 12.70 |
| 891 | 0.60 | 0.79 | 0.78 | 32.47 | 33.85 | 34.80 | 8.81 | 10.87 | 12.73 |
| 894 | 0.60 | 0.78 | 0.79 | 32.46 | 33.84 | 34.81 | 8.83 | 10.91 | 12.76 |
| 897 | 0.61 | 0.79 | 0.79 | 32.45 | 33.84 | 34.81 | 8.82 | 10.90 | 12.75 |
| 900 | 0.61 | 0.79 | 0.80 | 32.45 | 33.83 | 34.82 | 8.80 | 10.87 | 12.72 |
| 903 | 0.62 | 0.80 | 0.80 | 32.44 | 33.83 | 34.82 | 8.79 | 10.86 | 12.71 |
| 906 | 0.63 | 0.81 | 0.82 | 32.42 | 33.82 | 34.82 | 8.82 | 10.89 | 12.74 |
| 909 | 0.64 | 0.82 | 0.83 | 32.41 | 33.82 | 34.82 | 8.85 | 10.92 | 12.77 |
| 912 | 0.64 | 0.82 | 0.83 | 32.40 | 33.82 | 34.82 | 8.81 | 10.88 | 12.73 |
| 915 | 0.64 | 0.82 | 0.83 | 32.38 | 33.81 | 34.82 | 8.76 | 10.84 | 12.69 |

| FREQUENCY (MHz) | HARMONICS (dBc) | | | | | |
|--------------------|-----------------|--------|--------|--------|--------|--------|
| | F2 | | | F3 | | |
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| 885 | -27.31 | -28.17 | -29.37 | -47.45 | -48.72 | -50.58 |
| 888 | -27.29 | -28.18 | -29.39 | -47.89 | -49.61 | -51.42 |
| 891 | -27.35 | -28.20 | -29.40 | -48.07 | -49.92 | -51.91 |
| 894 | -27.41 | -28.22 | -29.42 | -48.25 | -50.23 | -52.41 |
| 897 | -27.61 | -28.38 | -29.56 | -48.28 | -50.28 | -52.29 |
| 900 | -27.87 | -28.62 | -29.76 | -48.23 | -50.19 | -51.86 |
| 903 | -28.15 | -28.87 | -29.99 | -48.41 | -50.20 | -51.54 |
| 906 | -28.44 | -29.16 | -30.26 | -49.03 | -50.37 | -51.44 |
| 909 | -28.74 | -29.45 | -30.53 | -49.66 | -50.55 | -51.33 |
| 912 | -28.97 | -29.69 | -30.74 | -50.62 | -51.46 | -52.00 |
| 915 | -29.19 | -29.92 | -30.95 | -51.58 | -52.37 | -52.67 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|---------|---------|---------|
| | +25°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 885 | -91.81 | -92.62 | -111.07 | -137.33 | -156.83 |
| 888 | -92.18 | -91.01 | -111.28 | -137.46 | -157.00 |
| 891 | -92.12 | -92.00 | -111.01 | -137.47 | -156.99 |
| 894 | -92.05 | -92.98 | -110.74 | -137.49 | -156.98 |
| 897 | -90.52 | -93.31 | -110.54 | -137.45 | -157.00 |
| 900 | -88.26 | -93.30 | -110.38 | -137.40 | -157.03 |
| 903 | -87.16 | -93.26 | -110.23 | -137.38 | -157.03 |
| 906 | -88.41 | -93.15 | -110.10 | -137.43 | -156.95 |
| 909 | -89.65 | -93.04 | -109.98 | -137.49 | -156.88 |
| 912 | -89.32 | -93.12 | -109.97 | -137.30 | -156.76 |
| 915 | -88.98 | -93.19 | -109.95 | -137.10 | -156.64 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|---------|---------|---------|
| | -45°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 885 | -88.24 | -93.31 | -107.58 | -134.28 | -154.30 |
| 888 | -88.25 | -93.04 | -107.23 | -134.17 | -154.24 |
| 891 | -90.79 | -92.50 | -107.37 | -134.15 | -154.23 |
| 894 | -93.33 | -91.95 | -107.50 | -134.13 | -154.22 |
| 897 | -92.69 | -91.14 | -107.65 | -134.08 | -154.13 |
| 900 | -90.45 | -90.21 | -107.80 | -134.02 | -154.01 |
| 903 | -88.85 | -89.52 | -107.87 | -133.94 | -153.90 |
| 906 | -88.53 | -89.36 | -107.79 | -133.80 | -153.85 |
| 909 | -88.20 | -89.19 | -107.70 | -133.67 | -153.80 |
| 912 | -88.70 | -88.69 | -107.81 | -133.56 | -153.64 |
| 915 | -89.20 | -88.18 | -107.92 | -133.45 | -153.48 |

| FREQUENCY (MHz) | PHASE NOISE (dBc/Hz) @ OFFSETS | | | | |
|--------------------|--------------------------------|--------|---------|---------|---------|
| | +85°C | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 885 | -92.61 | -93.56 | -110.18 | -135.83 | -155.53 |
| 888 | -89.58 | -93.12 | -109.83 | -135.69 | -155.45 |
| 891 | -90.18 | -93.16 | -109.56 | -135.78 | -155.53 |
| 894 | -90.77 | -93.21 | -109.28 | -135.86 | -155.61 |
| 897 | -92.00 | -93.43 | -109.17 | -135.96 | -155.65 |
| 900 | -93.56 | -93.74 | -109.14 | -136.07 | -155.65 |
| 903 | -93.95 | -93.99 | -109.10 | -136.11 | -155.65 |
| 906 | -92.02 | -94.09 | -109.04 | -136.01 | -155.64 |
| 909 | -90.09 | -94.20 | -108.98 | -135.92 | -155.62 |
| 912 | -90.45 | -93.31 | -109.04 | -135.87 | -155.56 |
| 915 | -90.81 | -92.42 | -109.09 | -135.82 | -155.49 |



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

| COMPARISON SPURIOUS ORDER | COMPARISON SPURIOUS @Fcarrier 885MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 900MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 915MHz+(n*Fcomparison) (dBc) note 1 | | |
|---------------------------------|--|---------|---------|--|---------|---------|--|---------|---------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -99.49 | -104.71 | -115.36 | -99.87 | -101.03 | -107.34 | -101.20 | -102.84 | -106.66 |
| -4 | -99.78 | -101.96 | -110.78 | -101.19 | -98.20 | -105.35 | -102.25 | -99.92 | -104.86 |
| -3 | -101.54 | -97.56 | -107.77 | -102.99 | -94.07 | -108.18 | -102.81 | -96.11 | -106.85 |
| -2 | -104.66 | -92.04 | -102.98 | -102.59 | -89.21 | -103.71 | -96.74 | -91.54 | -103.28 |
| -1 | -96.19 | -85.89 | -98.75 | -92.92 | -83.12 | -94.53 | -88.57 | -85.08 | -97.59 |
| 0 note 2 | - | - | - | - | - | - | - | - | - |
| +1 | -98.61 | -85.13 | -102.65 | -90.83 | -82.20 | -93.23 | -86.16 | -84.03 | -100.50 |
| +2 | -102.67 | -90.73 | -112.01 | -95.54 | -87.62 | -100.42 | -90.57 | -89.81 | -104.68 |
| +3 | -109.29 | -95.40 | -125.34 | -99.02 | -91.15 | -102.07 | -94.29 | -93.39 | -108.21 |
| +4 | -113.75 | -98.30 | -118.37 | -101.94 | -94.14 | -102.02 | -96.56 | -95.94 | -105.05 |
| +5 | -113.55 | -100.06 | -113.31 | -102.78 | -95.56 | -103.10 | -98.03 | -97.71 | -107.42 |

Note 1: Comparison frequency 1000 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

| REFERENCE SPURIOUS ORDER | REFERENCE SPURIOUS @Fcarrier 885MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 900MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 915MHz+(n*Freference) (dBc) note 3 | | |
|--------------------------------|--|---------|---------|--|---------|---------|--|---------|---------|
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -97.67 | -98.41 | -114.13 | -100.18 | -98.36 | -111.96 | -99.95 | -97.78 | -110.62 |
| -4 | -99.22 | -98.88 | -108.74 | -98.57 | -97.30 | -108.61 | -96.67 | -96.53 | -104.48 |
| -3 | -104.58 | -100.90 | -106.71 | -102.83 | -100.32 | -108.37 | -106.98 | -99.29 | -108.77 |
| -2 | -101.72 | -102.42 | -108.76 | -100.93 | -101.19 | -110.12 | -101.31 | -100.86 | -122.93 |
| -1 | -100.52 | -106.29 | -117.88 | -107.07 | -103.44 | -105.57 | -100.91 | -102.95 | -107.84 |
| 0 note 4 | - | - | - | - | - | - | - | - | - |
| +1 | -113.52 | -108.35 | -106.32 | -98.92 | -99.50 | -112.89 | -103.54 | -101.33 | -112.45 |
| +2 | -103.17 | -103.61 | -106.98 | -106.51 | -101.71 | -118.28 | -100.94 | -102.75 | -111.47 |
| +3 | -108.93 | -107.96 | -112.48 | -100.52 | -104.96 | -107.68 | -100.36 | -105.47 | -106.83 |
| +4 | -97.67 | -98.24 | -100.09 | -98.15 | -97.53 | -100.84 | -98.27 | -97.30 | -98.94 |
| +5 | -100.03 | -100.31 | -101.67 | -98.05 | -98.77 | -103.32 | -95.94 | -99.92 | -100.91 |

Note 3: Reference frequency 15 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

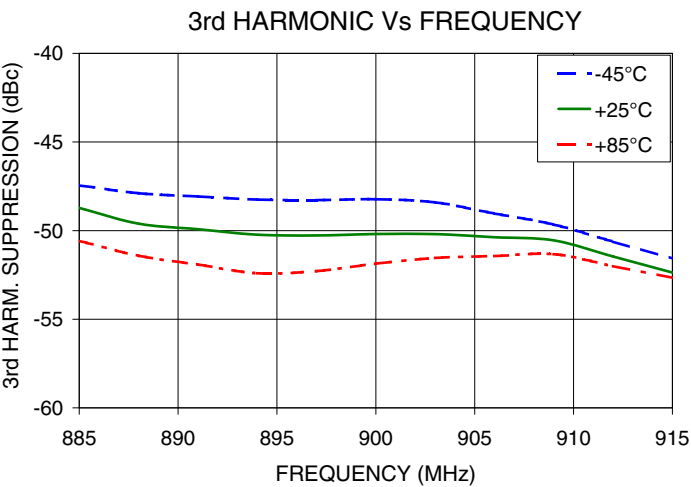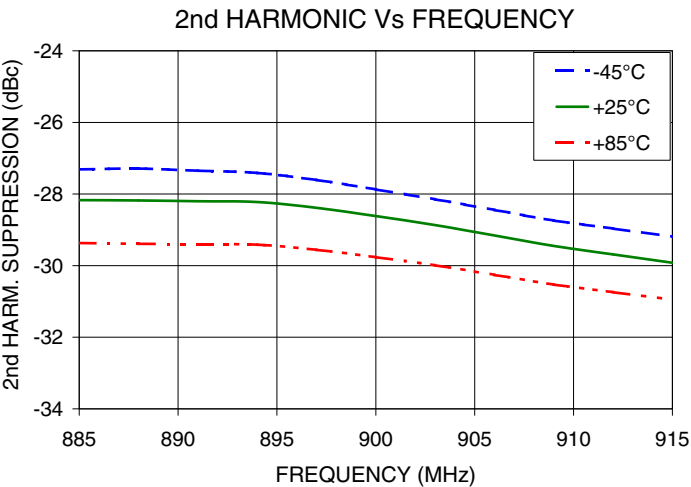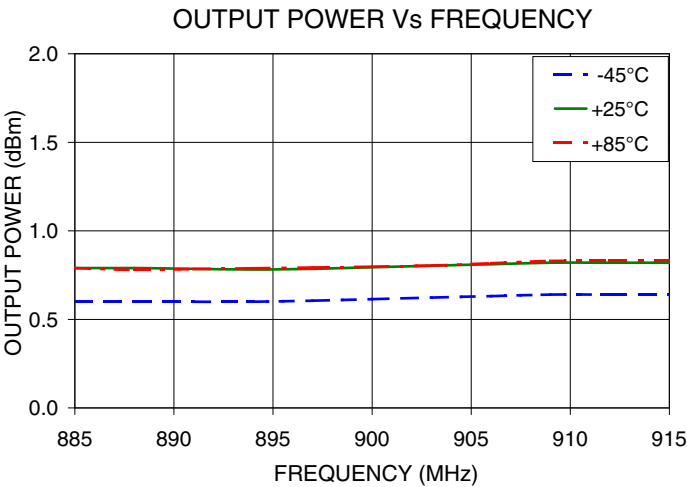






IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp.

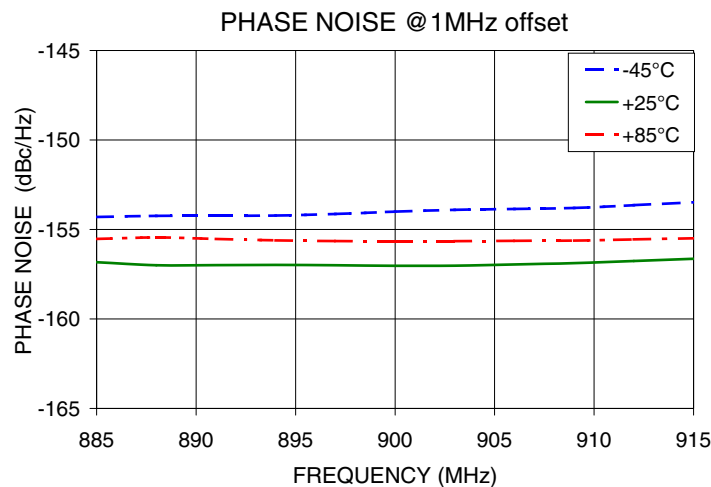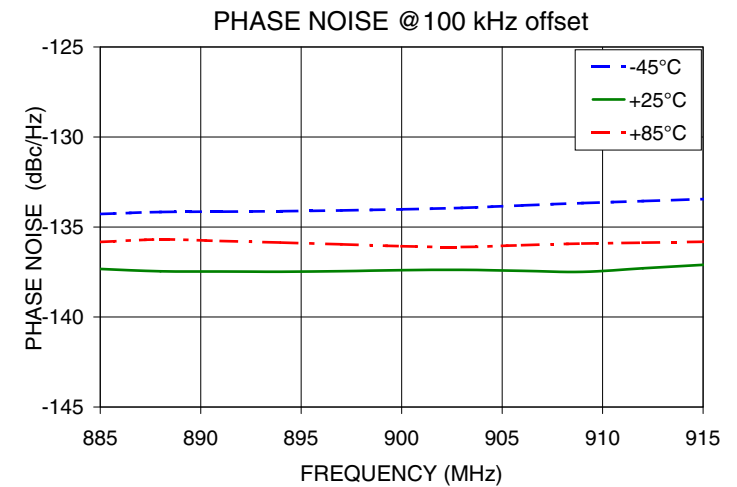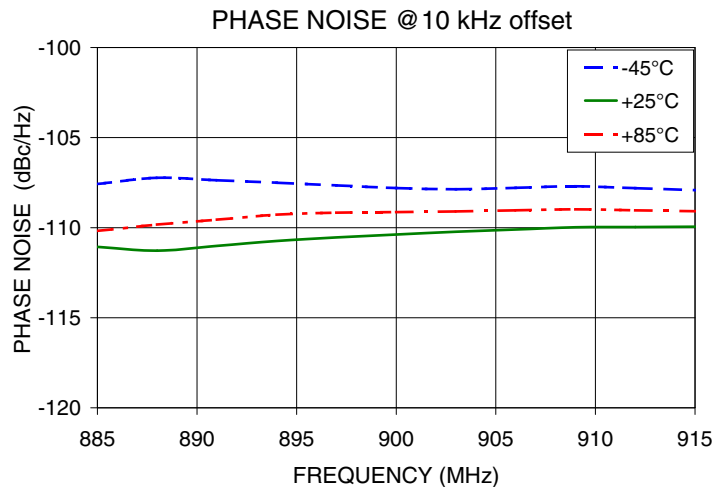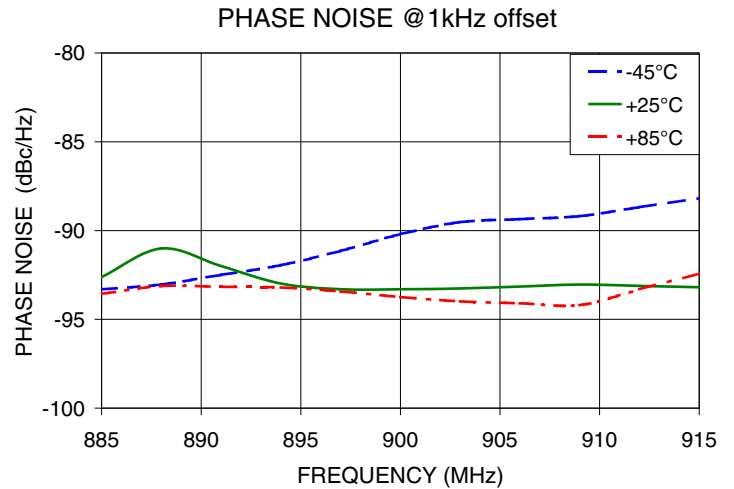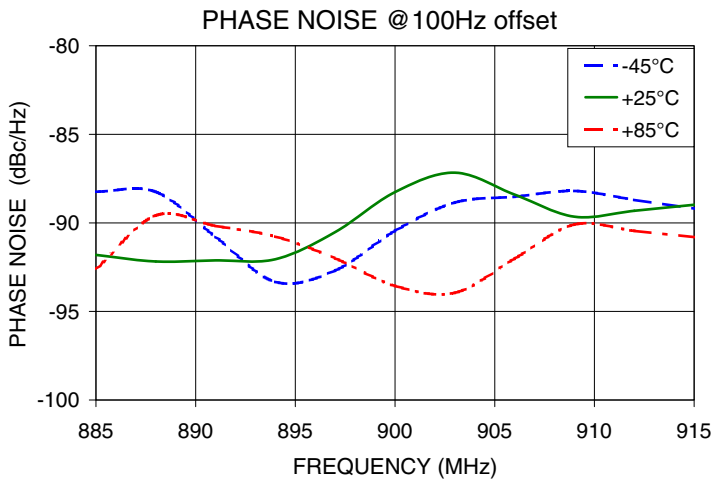

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 885MHz

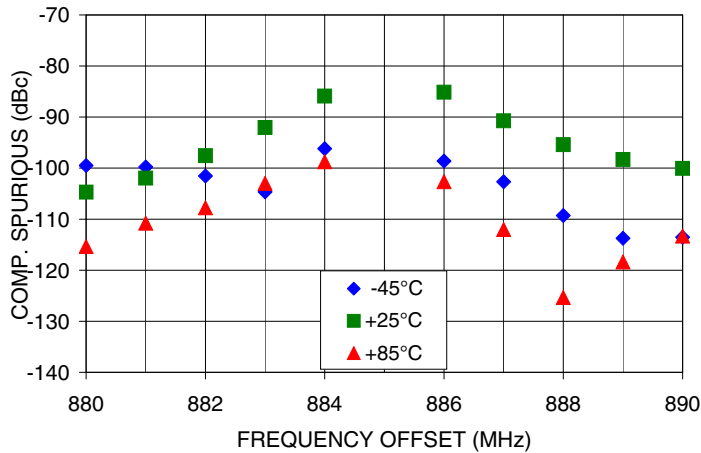


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 885MHz

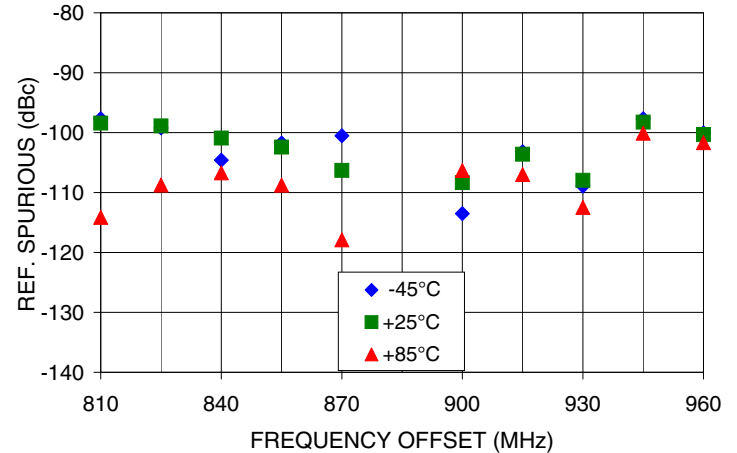


COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 900MHz

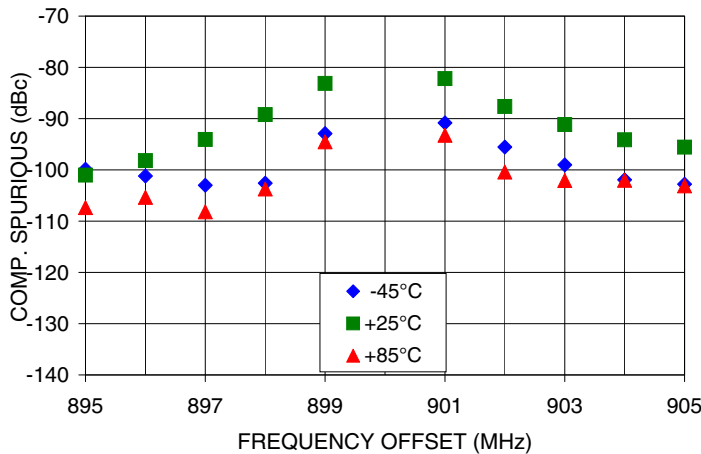


REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 900MHz

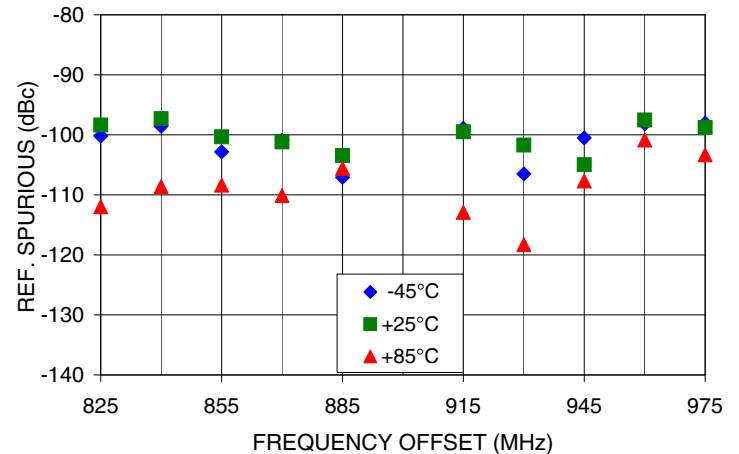

COMPARISON SPURIOUS
Vs FREQ. OFFSET @ Fcar = 915MHz

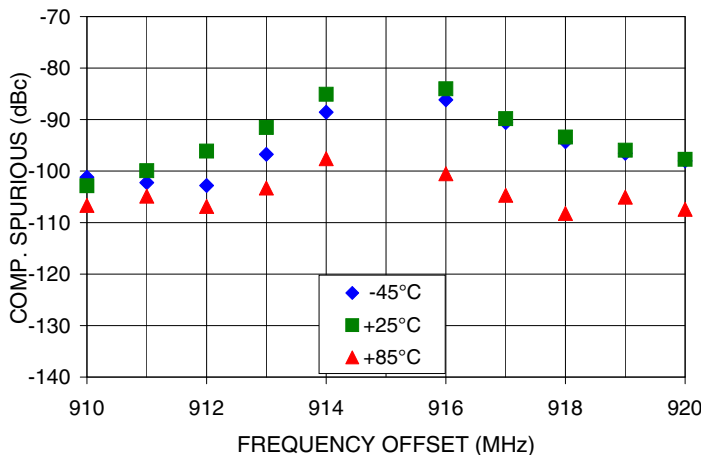

REFERENCE SPURIOUS
Vs FREQ. OFFSET @ Fcar = 915MHz

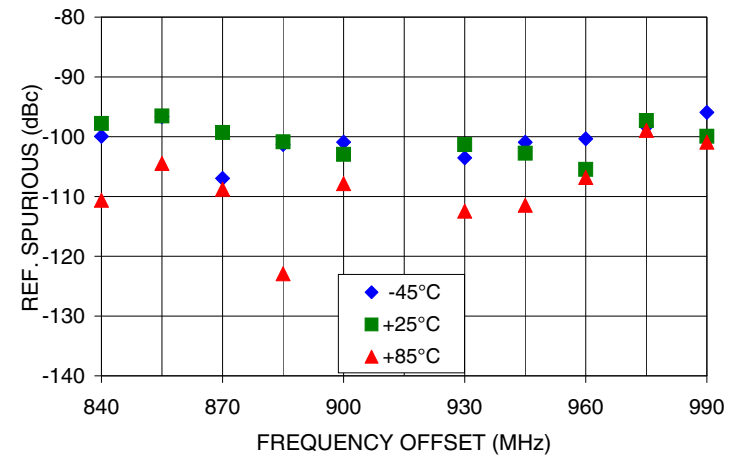

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

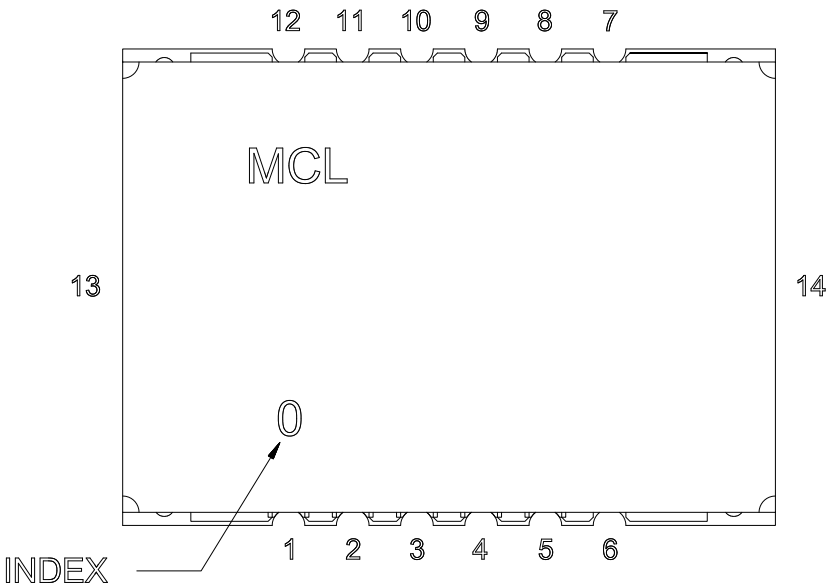


Pin Connection


| Pin Number | Function |
|------------|----------|
| 1 | VCC PLL |
| 2 | GND |
| 3 | REF IN |
| 4 | GND |
| 5 | VCC VCO |
| 6 | GND |
| 7 | RF OUT |
| 8 | GND |
| 9 | LOCK DET |
| 10 | CLOCK |
| 11 | DATA |
| 12 | LE |
| 13 | GND |
| 14 | GND |

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

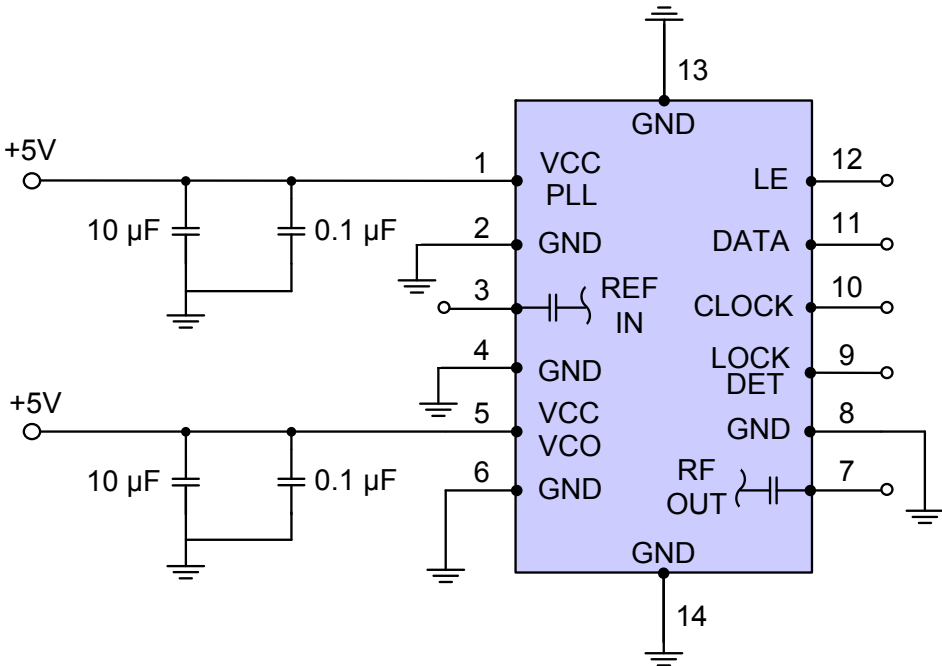

Device Marking

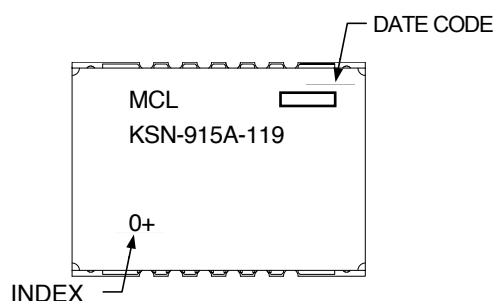

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK801

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2



IF/Rf MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.