




Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	947.5	-
Insertion Loss within 935.0 ~ 960.0 MHz	dB	-	2.6	3.5
Amplitude Ripple within 935.0 ~ 960.0 MHz	dB _{p-p}	-	0.9	1.5
VSWR within 935.0 ~ 960.0 MHz	-	-	2.1	2.5
Attenuation:				
DC ~ 870.0 MHz	dB	25	30	-
870.0 ~ 915.0 MHz	dB	30	35	-
980.0 ~ 985.0 MHz	dB	20	25	-
985.0 ~ 1025 MHz	dB	30	37	-
1025 ~ 1500 MHz	dB	28	34	-
1500 ~ 2000 MHz	dB	30	38	-

Parameters Description	Unit	Minimum	Typical	Maximum
Operation Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (Single Ended) ₁	Ω	-	50	-
Load Impedance (Single Ended) ₁	Ω	-	50	-
Package Size and Type	3.0 x 3.0 x 1.3 mm M			




Outline Drawing:

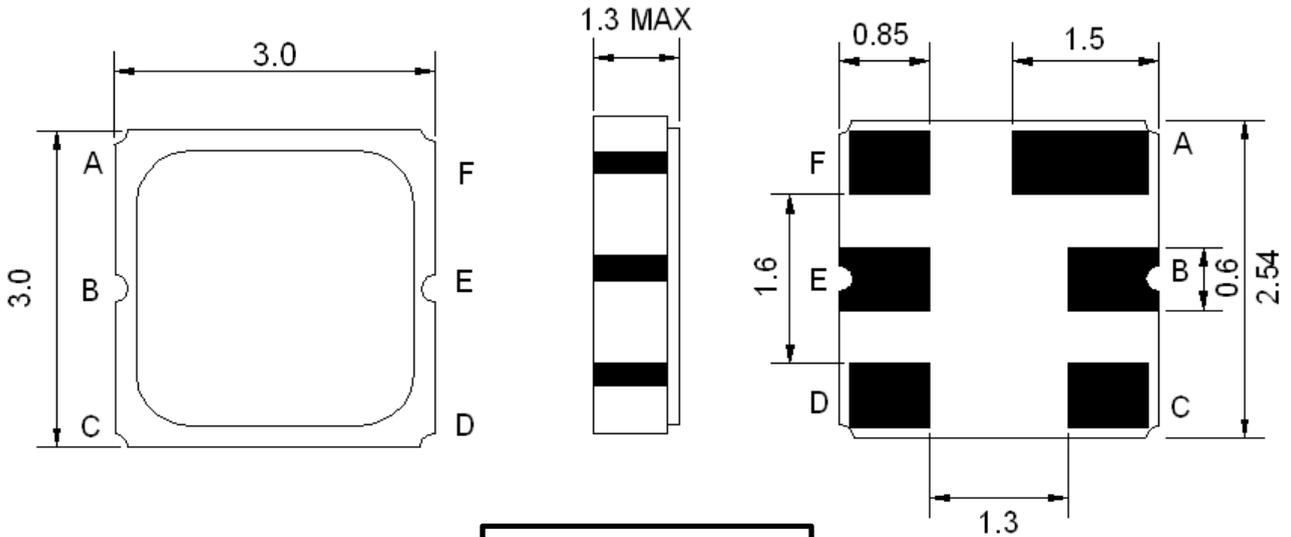

Pin Description:
Ground – A C D F
Input – E
Output – B

Testing Environment:

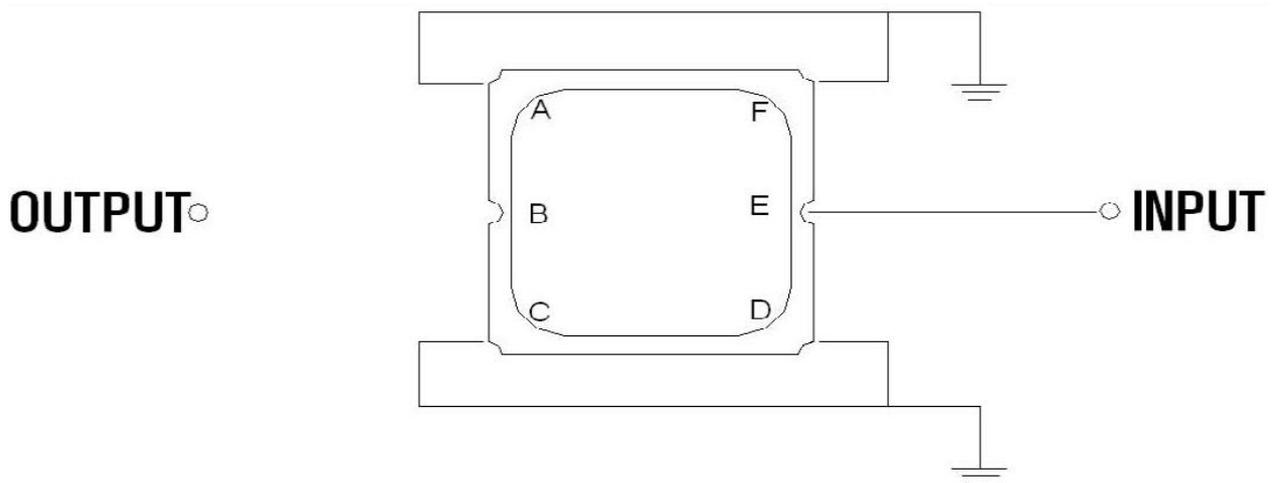

Source & Load Impedance: 50 Ω



947 MHz Saw Filter

Part Number: AM947S105



Response Plot:

