




Features

- Ultra-low Phase Noise/Low Current
- Frequency: 80MHz
- Resonator: Aircoil
- PCB: Rogers
- Package Size: 12.7mm x 12.7mm x 5.59mm (0.5in x 0.5in x 0.22in)

Applications

- IF Conversion Applications
- Low Phase Noise Agile Clock Applications
- Low Phase Noise Applications

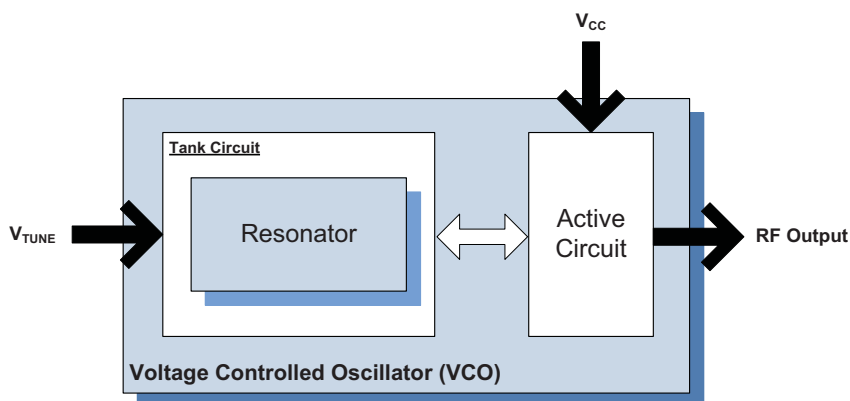

Functional Block Diagram

Product Description

This series of VCO modules offers an ultra-low noise VCO which includes an internal buffer amplifier for high performance IF conversion.

Ordering Information

UMJ-910-D14-G Contact us at 1-480-756-6070

Optimum Technology Matching® Applied

- | | | | |
|--------------------------------------|--------------------------------------|--|------------------------------------|
| ☐ GaAs HBT | ☐ SiGe BiCMOS | ☐ GaAs pHEMT | ☐ GaN HEMT |
| ☐ GaAs MESFET | ☐ Si BiCMOS | ☐ Si CMOS | ☐ BiFET HBT |
| ☐ InGaP HBT | ☐ SiGe HBT | ☒ Si BJT | ☐ LDMOS |

Absolute Maximum Ratings

Parameter	Rating	Unit
Operating Ambient Temperature[1]	-40 to +85	°C
Storage Temperature	-55 to +125	°C

[1] Frequency drift: 0.4MHz typical, 0.6MHz maximum (either extreme)



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.




RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2002/95/EC.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall					
Frequency Range		80		MHz	
Tuning Voltage	1		4	V _{DC}	
Tuning Sensitivity		1		MHz/V	
Output Power	7	9	11	dBm	
	7			dBm	At V _T =0
Output Phase Noise		-109	-104	dBc/Hz	1 kHz
		-134	-129	dBc/Hz	10kHz
		-154	-149	dBc/Hz	100 kHz
		-164	-159	dBc/Hz	1000kHz
Second Harmonic		-20	-15	dBc	
Frequency Pulling		0.1	0.2	MHz p-p	At 12dBr, all phases
Tuning Port Capacitance		330		pF	
Modulation Bandwidth		100		kHz	3dB BW
Frequency Pushing		0.1	0.2	MHz/V	
Power Supply					
Operating Voltage		4.5		V	
Supply Current		19		mA	

Package Drawing & Pin Outs

12.7mm x 12.7mm x 5.59mm (0.5in x 0.5in x 0.22in)

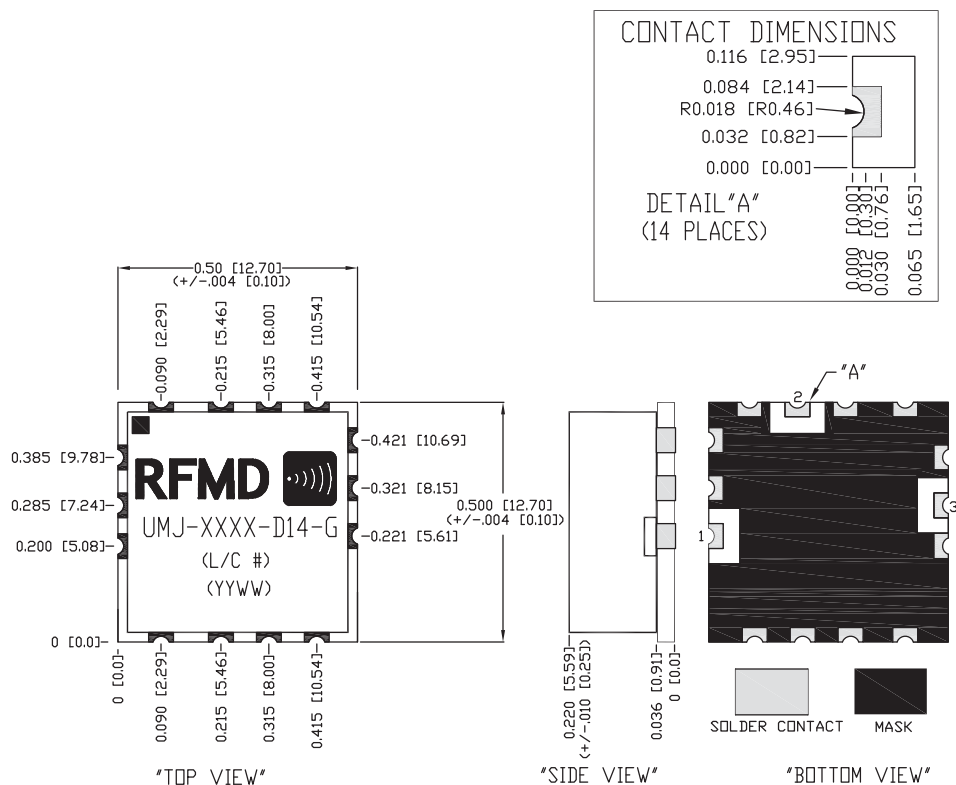

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	