

Coaxial

Adapter, N-FEM to BNC-MALE

50Ω DC to 2 GHz

NF-BM50+



CASE STYLE: DJ1011

Connectors		Model
Conn1	Conn2	
N-FEM	BNC-MALE	NF-BM50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- excellent VSWR, 1.05:1 typ.
- low insertion loss, 0.06 dB typ.
- brass body, nickel plated


Applications

- interconnection of RF cables and equipment
- connector saver

Electrical Specifications $T_{AMB}=25^{\circ}\text{C}$

FREQUENCY (GHz)	INSERTION LOSS (dB)	VSWR (:1) Max.
f_L - f_U	Typ.	DC-2 GHz
DC-2	0.06	1.15

Outline Drawing


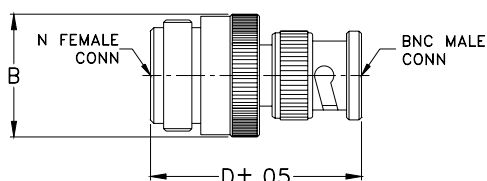


Outline Dimensions (inch/mm)

A	B	C	D	E	wt
--	.68	--	1.36	--	grams
--	17.27	--	34.54	--	31.8

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		N-FEM	BNC-MALE
0.30	0.08	1.00	1.00
1.00	0.04	1.00	1.00
5.00	0.03	1.00	1.00
10.00	0.03	1.00	1.00
50.00	0.03	1.01	1.01
100.00	0.03	1.01	1.01
200.00	0.04	1.02	1.01
300.00	0.04	1.03	1.01
400.00	0.04	1.04	1.02
500.00	0.04	1.05	1.02
600.00	0.05	1.06	1.02
700.00	0.05	1.06	1.02
800.00	0.06	1.07	1.03
900.00	0.06	1.07	1.03
1000.00	0.06	1.08	1.03
1200.00	0.06	1.08	1.03
1400.00	0.06	1.08	1.03
1600.00	0.07	1.08	1.03
1800.00	0.07	1.07	1.02
2000.00	0.07	1.06	1.01

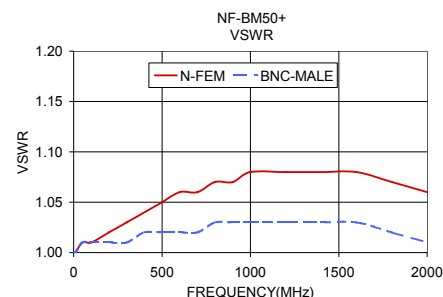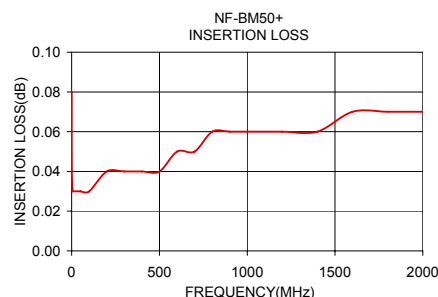

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/VCLStore/terms.jsp
www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
NF-BM50+
SS/TD/AM
150925